

# Counter-Depth Refrigerators

# EI23CS35KS

## Featuring IQ-Touch™ Electronic Controls







#### Luxury-Glide® Crispers

Drawers smoothly glide out and keep produce fresh with adjustable humidity control and minimal temperature variation.



#### **IQ-Touch**<sup>™</sup> Controls



## 9"-Tall Water/Ice Dispenser

Our tall water and ice dispenser is specially designed to accommodate a variety of large containers, from a 16-ounce tumbler to a pitcher or a coffee carafe.




#### PureAdvantage® Air Filter

Keeps clean, filtered air circulated throughout to prevent odor transfer.

| Capacities   |                            |
|--|----------------------------|
| Total Capacity   | 22.7 Cu. Ft.               |
| Fresh Food Volume  | 14.08 Cu. Ft.              |
| Freezer Volume   | 8.59 Cu. Ft.               |
| Total Shelf Area   | 22.31 Sq. Ft.              |
| Fresh Food Shelf Area  | 16.69 Sq. Ft.              |
| Freezer Shelf Area   | 5.62 Sq. Ft.               |
| Exterior   |                            |
| Signature Soft-Arc Door and Handle Design  | Yes                        |
| Electronic Controls  | IQ-Touch™                  |
| Hidden Hinge Door Design   | Yes                        |
| Ice/Water Dispenser  | Yes                        |
| Perfect Set® Temperature Control System and Dis<br>Crushed/Cubes/Water   | Yes/Yes/Yes                |
| Air and Water Filter Indicator/Reset   | Yes                        |
| Fast Ice™/Fast Freeze™   | Yes/Yes                    |
| Lock/Dispenser Light Control   | Yes/Yes                    |
|  |                            |
| Fresh Food Conveniences  | Yes                        |
| PureAdvantage® Water & Ice PureAdvantage® Air Filtration   | Yes                        |
| Water Filter Location  | Right Rear                 |
| Temp Alarm System  | Yes                        |
| Door Ajar Alarm/Power Failure Alarm  | Yes/Yes                    |
| Glass Shelves  | 3 SpillSafe® Sliding       |
| Dual Humidity-Controlled Upper Crisper   | Luxury-Glide®              |
| Humidity-Controlled Lower Crisper  | Luxury-Glide®              |
| Perfect Temp® Drawer   |                            |
| Chill Zone™ Drawer   | Luxury-Glide®              |
| Wine and Beverage Mat  |                            |
| Clear Gallon Door Bins   | 1 Removable                |
| Clear 2-Liter Door Bins  | 2 Adjustable               |
| Condiment Bin  | 1                          |
| Perfect Bin™ Door Storage  Dairy Compartment with Clear Cover  |                            |
| Tall Bottle Retainers  |                            |
| Clear In-Door Can Racks (Holds 6 Cans Each)  | 2                          |
| Luxury-Design® LED Ramp-Up Multilevel  | Yes                        |
|  |                            |
| Freezer Conveniences Automatic Ice Maker with Ice Server   | Yes                        |
| Glass Shelves  | 2                          |
| Sliding Full-Width Freezer Baskets   | 1 Luxury-Glide®/1 Standard |
| Sliding Half-Width Freezer Baskets   | 1                          |
| Clear Fixed Door Bins  | 4                          |
| Tilt-Out Wire Door Racks   |                            |
| Ice Cream Shelf  | Yes                        |
| Soft Freeze™ Bin   |                            |
| Pizza Shelf  |                            |
| Luxury-Design® LED Ramp-Up Multilevel  | Yes                        |
| Additional Features  |                            |
| A.D.A. Compliant <sup>1</sup>  | Yes                        |
| ENERGY STAR®   | No                         |
| Sabbath Mode (Star-K® Certified)   | Yes                        |
|  |                            |
| Specifications Color -   |                            |
| Stainless Steel  | S                          |
| White  | W                          |
| Black  | В                          |
| Product Dimensions –   |                            |
| Height (with Hinges and 3/8" Rollers)  | 69-1/2"                    |
| Cabinet Width/Door Width   | 35-5/8"/36"                |
| Depth (to Center of Arc)   | 28-3/16"<br>45"            |
| (with 90° Door Open)   | Right Bottom Rear          |
| Power Supply Connection Location  Water Inlet Location   | Left Bottom Rear           |
| Voltage Rating   | 120V/60 Hz/15 or 20A       |
| Connected Load (kW Rating) @ 120 Volts‡  | 1.02                       |
| Minimum Circuit Required (Amps)  | 15                         |
| Shipping Weight (Approx.)  | 325 Lbs.                   |
| f An electrical supply with grounded three-prong receptacle is r<br>be installed in accordance with current edition of National Elec |                            |



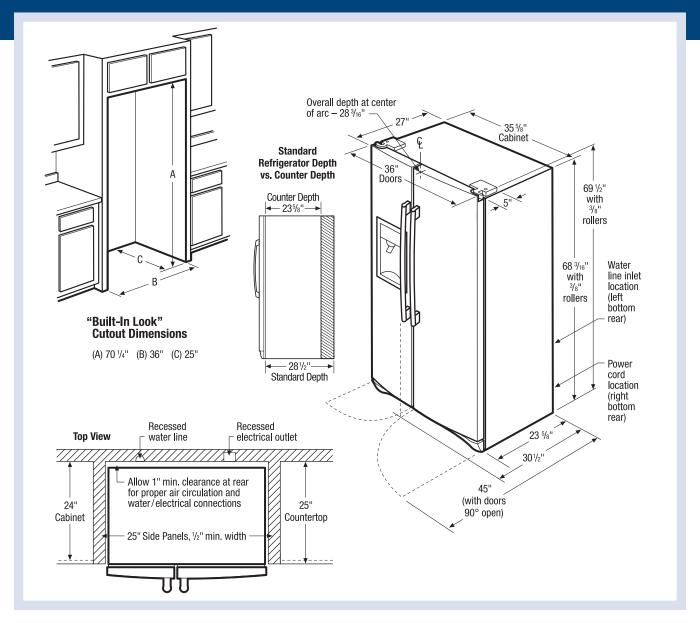

#### **Counter-Depth Refrigerator Specifications**

- Product Weight 315 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating 120V/60 Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance
  that extends beyond front edge of unit, 20" minimum clearance
  recommended to allow for optimum 120° to 180° door swing, providing
  complete drawer/crisper access and removal. (Absolute 4-1/2"
  minimum clearance will ONLY allow for 90° door swing which will provide
  drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- · Adjustable front rollers to assist with door alignment.

#### "Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

