

FRIGIDAIRE

# Top Mount Refrigerator

17 Cu. Ft. Top Mount

LFHT1713L W/B/Q  
(173998/174304/338998)

**LOWE'S**  
Exclusive



## More Easy-To-Use Features

### Reversible Door

Available in:



White  
(W)



Black  
(B)



Bisque  
(Q)

### ENERGY STAR® Qualified

This appliance is rated:

- Efficient (CEE Tier 1)
- More Efficient (CEE Tier 2)
- Most Efficient (CEE Tier 3)

Based on information from the Consortium Energy Efficiency Agency

### Accessories

Icemaker - IM115 (165156)

## Signature Features

### SpaceWise™ Adjustable Wire Shelves

Easily adjust shelves up and down to create more space for taller items.

### Store-More™ Humidity-Controlled Crisper Drawers

Keep your fruits and vegetables fresh in our humidity-controlled crisper drawers.

### Store-More™ Gallon Door Shelf

Door storage gives you room for larger items like a gallon of milk.

### Full-Width Freezer Shelf

Gives you more usable door space for accessibility.

Features	
Door Design	Square
Door Handle Design	Color-Coordinated
Cabinet Finish (Textured)	Color-Coordinated
Door Stops	Yes
Door Hinge Covers	Color-Coordinated
Door Reverse Option	Yes
Left-Swing Door	-
Rollers - Front/Rear	Fixed/Yes
Sound Package	Standard
Toe Grille	Color-Coordinated
Refrigerator Features	
Interior Lighting	Yes
Refrigerator Shelves	2 SpaceWise™ Adjustable Wire
Cool Zone™ Drawer	-
Wine/Can Rack	-
Store-More™ Crisper Drawers	2 White
Humidity Controls	2
Dairy Compartment	White Dairy Door
Door Bins	-
Door Racks	3 Full-Width White
Non-Slip Bin Liner	-
Tall Bottle Retainers	-
Gallon Door Storage	1
Freezer Features	
Door Bins	-
Door Racks	2 Full-Width White
Freezer Shelves	1 Full-Width Wire
Ice Maker	Optional (IM115 #165156)
Lighting	-
Certifications	
ENERGY STAR®	Tier 1
Specifications	
Total Capacity (Cu. Ft.)	16.5
Refrigerator Capacity (Cu. Ft.)	12.76
Freezer Capacity (Cu. Ft.)	3.74
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Bottom Right
Voltage Rating	120V / 60Hz / 15 or 20A
Connected Load (kW Rating) @ 120 Volts <sup>1</sup>	.54
Amps @ 120 Volts	4.5 Amps
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	190 Lbs.
Warranty	
1 Year Limited	Parts & Labor
Exterior Dimensions	
A - Cabinet Height	64-3/8"
B - Total Height (Incl. Hinge Covers)	65-1/8"
C - Cabinet Width	28"
D - Cabinet Depth	26-5/8"
E - Cabinet Depth (Incl. Door)	29-3/8"
F - Total Depth (Incl. Handle)	31-3/8"
G - Depth (Door Open 90°)	56"

<sup>1</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Measure Twice So It Fits Right...

1. Measure the height, width and depth of the opening, making sure to include baseboards, molding, tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to chart B below to determine dimensions.
3. Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details consult manual packed with product, or download manual on-line at [www.frigidaire.com](http://www.frigidaire.com).

Chart A


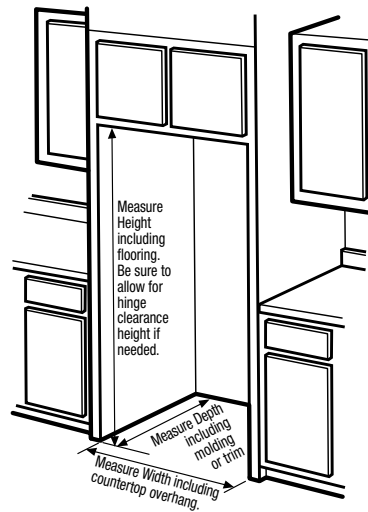


Chart B

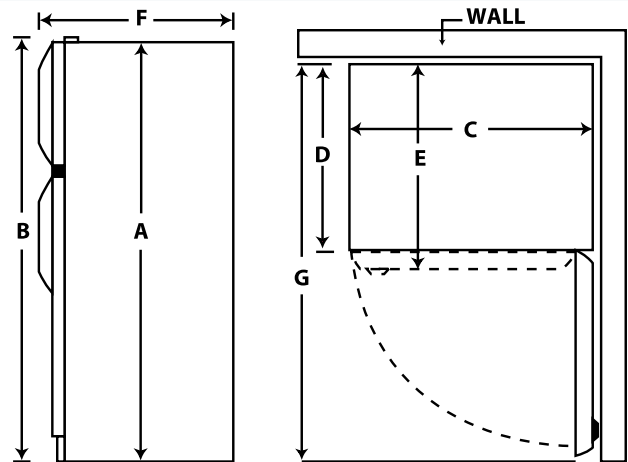

Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow 3/8" minimum clearance at sides and top for ease of installation.

When installing directly adjacent to wall, sufficient handle clearance required where handle may make contact with wall, to allow for 90° door opening.\*

\* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)

NOTE: Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).

