## FRIGIDAIRE

AVAILABLE COLORS

# FFHX2325T S/M/P/E



## SIGNATURE FEATURES

### **ENERGY STAR®-Qualified**

Maximize your energy and dollar savings with ENERGY STAR®-Qualified Appliances.

### **PureSource 3**®

Clean, pure, refreshing water that removes impurities straight from your refrigerator.

## Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator. Details vary by model.

## Multi-Level LED Lighting

Corner-to-corner LED lighting throughout the refrigerator for better visibility.

## SIDE-BY-SIDE REFRIGERATOR 22.0 CU. FT. STANDARD-DEPTH

#### **PRODUCT DIMENSIONS**

Height (Including Hinges & Rollers)	69-7/8″
Width (Doors)	33"
Depth (Including Door)	32"

#### MORE EASY-TO-USE FEATURES

**Deli Drawer** Keeps sandwich meats and cheeses organized in a convenient location.

Store-More<sup>™</sup> Humidity-Controlled Crisper Drawers Keep your fruits and vegetables fresh in our humidity-controlled crisper drawers.

Store-More™ Capacity Our large capacity refrigerator gives you room to store more.

Store-More™ Gallon Door Bins Door storage gives you room for larger items — like a gallon of milk.

Clear Dairy Door

Store-More<sup>™</sup> Shelves More space to store your food with edge-to-edge shelves.

Filter Change Alert

**Control Lock Option** 

Ready-Select® Controls Easily select options with the touch of a button.

#### CERTIFICATIONS

ENERGY STAR®




## FFHX2325T S/M/P/E SIDE-BY-SIDE REFRIGERATOR 22.0 CU. FT. STANDARD-DEPTH

FEATURES	
Door Design	Tall UltraSoft™
Door Handle Design	Stainless Steel (S), C-Coordinated (M/P/E)
Cabinet Finish	Grey (S), C-Coordinated (M/P/E)
Door Stops/Door Closers	Yes/Yes
Door Hinge Covers	Hidden
Rollers – Front/Rear	Adjustable/Yes
Energy Saver Plus Technology	Yes
Water Filter Location	Top Right Rear
DISPENSER	
Controls	Ready-Select®
Dispenser Design	Tall, 2 Paddle
Number of Dispenser Buttons	5
Crushed Ice/Cube Ice/Water	Yes/Yes/Yes
Ice Option/Freeze Option	
Control Lock/Light	Yes/Yes
Temp/Door Ajar/Power Failure Alerts	
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	
REFRIGERATOR FEATURES	
Interior Lighting	LED
Water Filter Type	PureSource 3*
Air Filter Type	
Fixed Shelves	2 Store-More™ Glass
Deli Drawer	Yes
Wine/Can Rack	
Upper Crisper/Lower Crisper	1 Clear/1 Clear
Humidity Controls	1
Dairy Compartment	1 Clear
Fixed Door Bins	2 Two-Liter Clear
Adjustable Door Bins	2 One-Gallon Clear
Non-Slip Bin Liner/Bottle Retainers	
FREEZER FEATURES	
Door Bins/Tilt-Out Wire Door Bins	4 White/No
Fixed Shelves	1 Flip/2 Wire
Full Extension Baskets	1.7
Full Freezer Baskets	1 Plastic
Half Freezer Baskets	
Ice Cream Shelf/Pizza Shelf	
SpaceSaver™ Shelf	
Lighting	LED
CERTIFICATIONS	
ENERGY STAR®	Yes
SPECIFICATIONS	
Total Capacity (Cu. Ft.)	22.0
Refrigerator Capacity (Cu. Ft.)	14.1
Freezer Capacity (Cu. Ft.)	7.9
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V/60Hz
Connected Load (kW Rating) @ 120 Volts <sup>1</sup>	1.02
Amps @ 120 Volts	8.5 Amps
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	285 Lbs.
<sup>1</sup> For use on adequately wired 120V, dedicated circuit hav	

For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

#### PRODUCT DIMENSIONS


69-7/8″	
32-7/8"/33"	
32"	
48"	
	32-7/8"/33" 32"

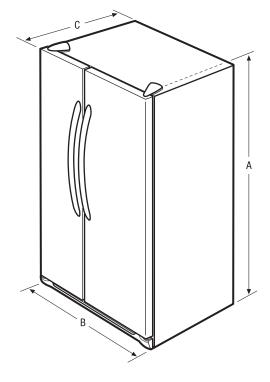

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com

FRIGIDAIRE -

## FFHX2325T S/M/P/E SIDE-BY-SIDE REFRIGERATOR 22.0 CU. FT. STANDARD-DEPTH

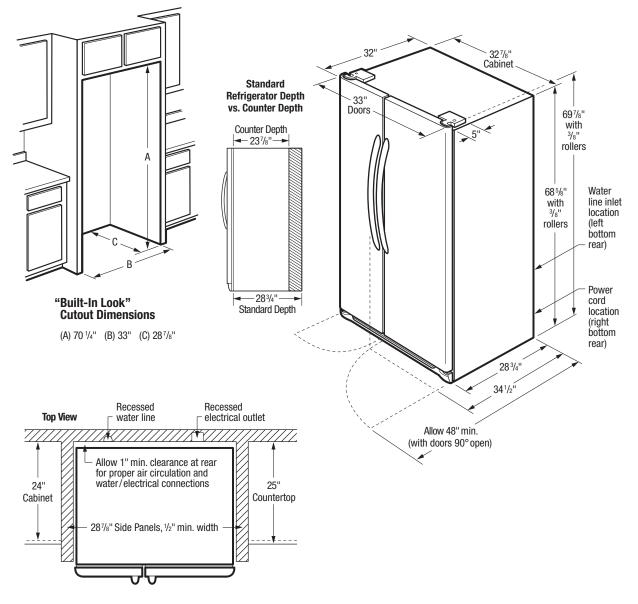

## INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) 285 Lbs.
- Voltage Rating 120V/60 Hz
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
- (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.) • Amps @ 120 Volts = 8.5 Amps
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
  Adjustable front rollers to assist with door alignment.

#### **"BUILT-IN LOOK" SPECIFICATIONS**

- Minimum opening of 70-1/4" H x 33" W x 28-7/8" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com