FRIGIDAIRE

Top Mount Refrigerator

LFHT1817L F/R/W/B (327306/356190/327337/327338) 18 Cu. Ft. Top Mount







Product Dimensions

Height (Including Hinges) 66-5/8" Width 30" Depth (Including Door) 30-1/8"

More Easy-To-Use Features

Full-Width Door Racks

Gives you more usable door space for accessibility and better organization.

Full-Width Freezer Shelf

For more usable space and better organization.

Store-More™ Gallon Door Shelf

Door storage gives you room for larger items like a gallon of milk.

Bright Lighting

Our bright lighting makes it easy to see what's inside.

Cool Zone™ Drawer

Conveniently located in the fresh food section, the Cool Zone™ Drawer is ideal for deli meats, cheeses and sandwich fixings or any food items that are frequently used.

Reversible Door

Door can be installed to open left or right based on your needs (W/B only).

Built With American Pride

Signature Features

SpaceWise® Adjustable Wire Shelves

Easily clean and adjust glass shelves up and down to create more space for taller items.

Store-More™ Clear Humidity-Controlled Crisper Drawers

Keep your fruits and vegetables fresh in our humidity-controlled crisper drawers.

Available in:



ONLY AT LOWE'S! Easy Care™ Stainless Steel

A clear protective coating reduces fingerprints and smudges.

ONLY AT LOWE'S! Easy Ice Ready

Install your optional ice maker in less than 5 minutes with Lowe's exclusive quick-connect technology. Easy Ice allows you to add ice-making capabilities to Lowe's exclusive Frigidaire Top Mount refrigerators.

Compare to Model: FFHT1817LS with these additional features

- EasyCare[™] Stainless Steel
- Easy Ice

LFHT1817L F/R/W/B **18 Cu. Ft.**

| F4 | |
|--|--|
| Features | 1111 0 6171/01 1 0 |
| Door Design | UltraSoft™/Short Dooi |
| Door Handle Design | Color-Coordinated |
| Cabinet Finish (Textured) | Color-Coordinated |
| Door Stops | Yes |
| Door Hinge Covers | Color-Coordinated |
| Door Reverse Option | Yes |
| Left-Swing Door | (R) Stainless |
| Rollers - Front/Rear | Fixed/Yes |
| Toe Grille | Color-Coordinated |
| Refrigerator Features | |
| Interior Lighting | Bright |
| Refrigerator Shelves | 2 Sliding SpaceWise® Adjustable Glass |
| Cool Zone™ Drawer | Clear |
| Store-More™ Crisper Drawers | 2 Clear |
| Humidity Controls | 2 |
| Dairy Compartment | Clear Dairy Door |
| Door Bins | 3 Full-Width White |
| Gallon Door Storage | 1 |
| Freezer Features | |
| Door Racks | 2 Full-Width White |
| Freezer Shelves | 1 Full-Width Wire |
| Ice Maker | Optional (IM115) |
| Certifications | |
| ENERGY STAR* | No |
| Specifications | |
| Total Capacity (Cu. Ft.) | 18.3 |
| Refrigerator Capacity (Cu. Ft.) | 14.2 |
| Freezer Capacity (Cu. Ft.) | 4.1 |
| Power Supply Connection Location | Right Bottom Rear |
| Water Inlet Connection Location | Bottom Right |
| Voltage Rating | 120V/60Hz/15 or 20A |
| Connected Load (kW Rating) @ 120 Volts ¹ | .72 |
| Amps @ 120 Volts | 4.5 Amps |
| Minimum Circuit Required (Amps) | 15 |
| Shipping Weight (Approx.) | 205 lbs. |


¹ For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Electrical Specifications

- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- \bullet Voltage Rating 120V / 60 Hz / 15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = .72 kW
- Amps @ 120 Volts = 4.5 Amps

Optional Accessories

 Optional Ice Maker Kit (PN # IM115) available for installation in ice maker-ready models only.

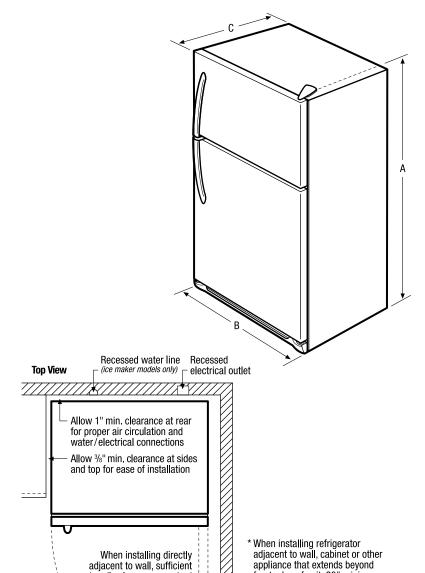

adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

handle clearance required

contact with wall, to allow

for 90° door opening

where handle may make



| Product Dimensions | |
|--------------------------------------|---------|
| A - Height (Incl. Hinges and Covers) | 66-5/8" |
| B - Width | 30" |
| C - Depth (Including Door) | 30-1/8" |
| Depth with Door Open 90° | 58-1/2" |

Accessories information available on the web at **frigidaire.com**