



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Chrome plated metal construction
- 1/2" connections: IPS - exterior, CC - interior
- Includes showerhead, arm and flange

OPERATION

- Dual control
- Lever handles
- Volume and temperature controlled by rotating handles toward spout to open

FLOW


- Showerhead is limited to 2.5 gpm (9.5 L/min) max.
- EP suffix showerheads are limited to 2.0 gpm (7.6 L/min) max.

CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel materials

STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein

- **ADA**  for lever handles

- Meets WaterSense® criteria for EP suffix models
- Meets New York City Local Law No. 57 for EP suffix models

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

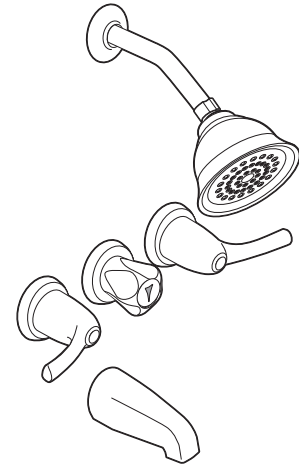


MOEN® Three-Handle Tub/Shower Valve

Models: 82403 series



(For EP suffix models)

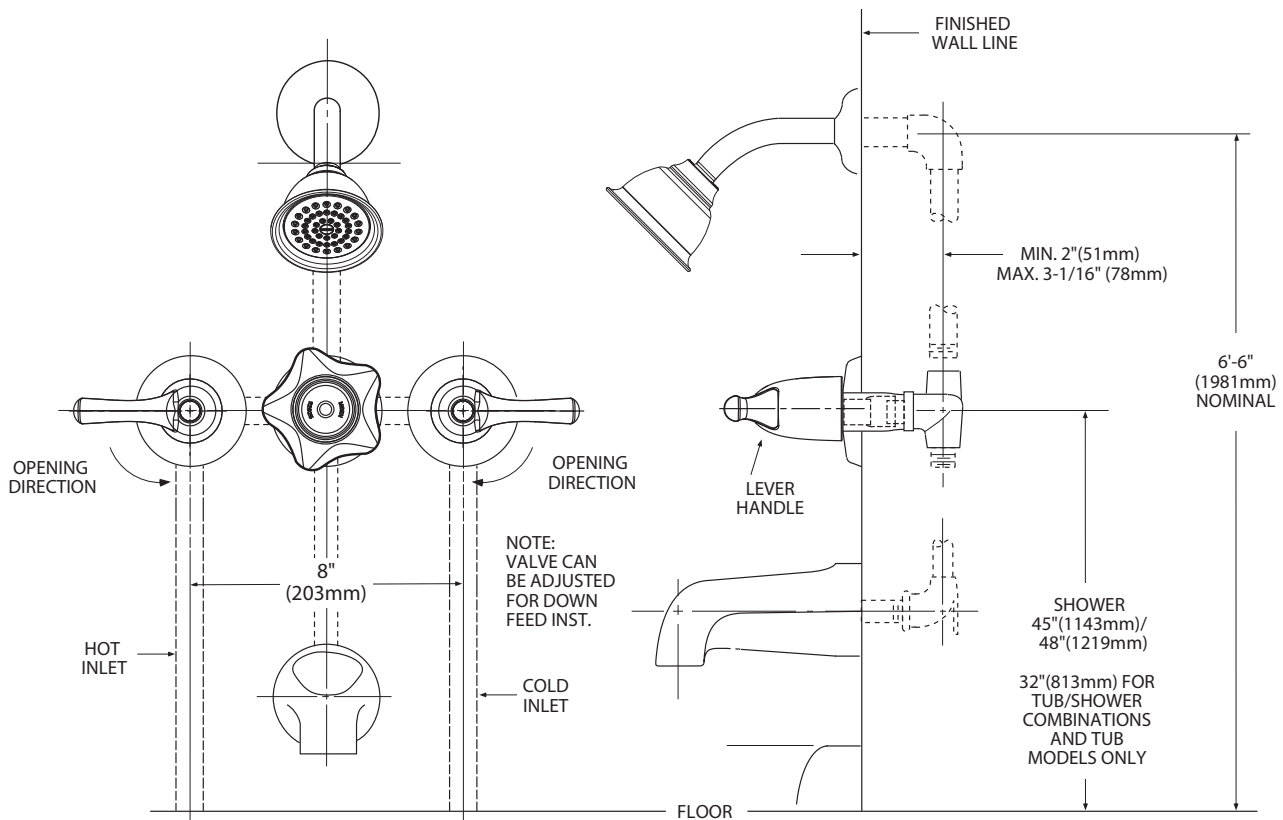

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com