

FAUCET DESCRIPTION

- Chrome plated solid brass body
- Gooseneck single wall-mount faucet
- 5.75" x 6" x 10.25" gooseneck included

OPERATION

- Adjustable infrared sensor (range, turn off delay and obstruction delay)
- Temperature controlled by mixing valve or mixing tee (optional)
- Battery powered (AC optional)


FLOW

- Supplied with vandal resistant 0.5 gpm (1.9 L/min) aerator (with key)

VALVES


- In-line filter included
- Slow close solenoid valve

STANDARDS

- Third party certified to CSA B-125.1/ASME A112.18.1, and all applicable specifications referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  compliant


WARRANTY

- Warranted for 5 years against material or manufacturer defects

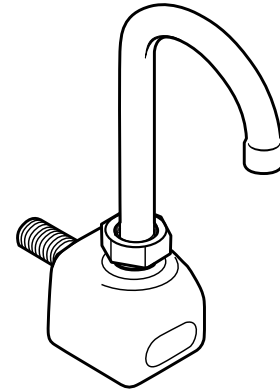


Single Wall-Mount, Gooseneck, Non-Mixing, Battery Powered Electronic Faucet

Model: CA8304

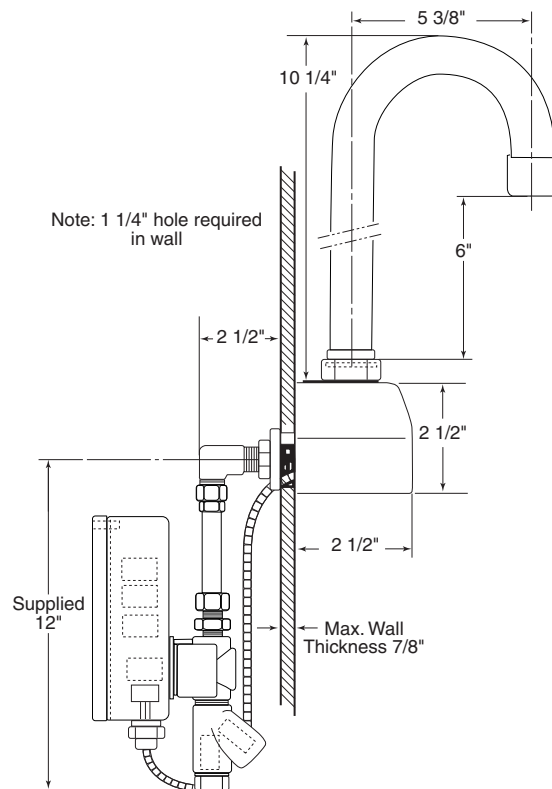

CRITICAL DIMENSIONS

(DO NOT SCALE)



FRONT VIEW