



# Solar Triple Head Security Light



the bright way to do home security.

PLEASE READ CAREFULLY AND SAVE THESE INSTRUCTIONS, AS YOU MAY NEED THEM AT A LATER DATE.

### IMPORTANT SAFETY OPERATING INSTRUCTIONS

1. Please read all warning and instruction labels which are included in the box and fixture to avoid personal injury, property damage caused by fire, cuts, bruises, death and other dangers.
2. Please follow these general precautions before installing, maintaining, or fixing

### WARNING


1. The packing contains small parts that could be swallowed by children
2. Keep the packaging material away from children and pets
3. The solar light is not a toy
4. We do not take responsibility if the instruction manual is not followed correctly or if the product is handled improperly resulting in damage to person or property

### PRECAUTION

1. It is important to select an outdoor location with full, direct sunlight where the solar panel can receive at least 8 hours of sunlight each day.
2. It is important to avoid placing the solar light by light sources, such as street lights or porch lights, which may cause the solar light to turn off automatically.
3. To avoid explosion and corrosion, please keep the solar light away from fire and humid environment
4. No striking to avoid any damages to solar cell

1

### REF. PARTS

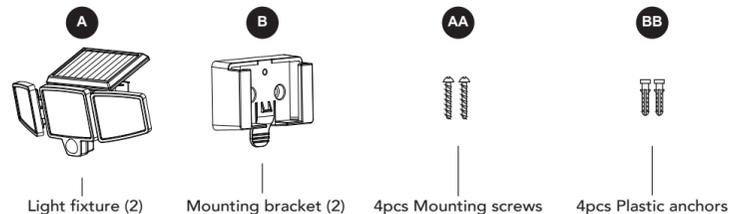

### PARAMETER

1. Light source: up to 1000lumens / 3000-3500K
2. Power supply: 1x 3.7V 1800mAh Li-ion rechargeable battery
3. Detect distance: 32.8ft/120 degree
4. Light duration: 20s

2

### HOW TO OPERATE AND INSTALL LIGHT FIXTURE

Figure 1: Place the mounting bracket to a desired position, and mark the screw points through the holes. Use power drill and screw drivers to fasten the bracket to the chosen surface. If mounting on brick or other hard siding, use a 1/4-in drill bit to pre-drill holes to insert screw anchors.

### Note:

- Ideal height is 5 Ft.- 8 Ft. from the ground. At such a height, the fixture will provide a detection distance of up to 25 feet.
- Do not mount the fixture near a heat source like an air conditioner, vent, or furnace exhaust, or in a direction facing a reflective object or nearby light source.
- The sensor cannot be placed less than 5 Ft. from any reflective material. If the light flashes, the sensor is too close to such a material. If this happens, move the light fixture.

Figure 2: Buckle the motion light to the mounting bracket securely, and adjust the solar panel and light heads to the desired direction.

Figure 1





Figure 2




3

### HOW TO OPERATE AND INSTALL LIGHT FIXTURE


Figure 3: In case you want to take the light off, please press the tab below to slip the light off by moving it upward.

Figure 3




### MODE SELECTION

- OFF → Motion Sensor Mode (1000lm brightness will stay on for 3s for mode indication. Under this mode, light will be triggered by motion detection and stay on for 20s when body moves out of sensor range)
- Dim light / Motion Sensor Mode (20lm low brightness will stay on for 3s for mode indication. Under this mode, dim light of 20lm will turn on at dusk for up to 6hrs, and full brightness of 1000lm with 20s duration will turn on with motion detection)



4

### HOW IT WORKS

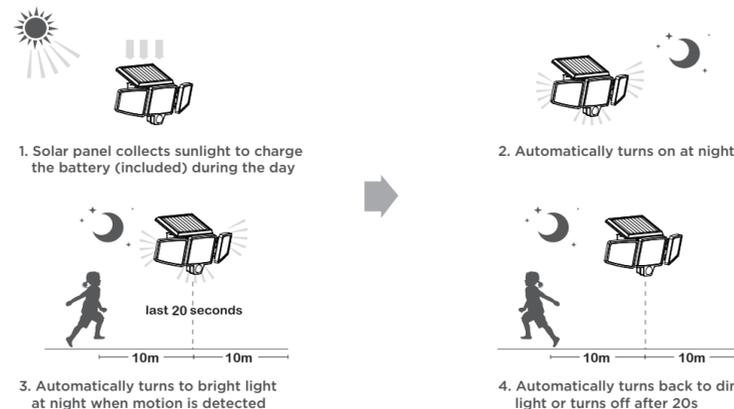

5

### CLEANING AND MAINTENANCE

To prolong the original appearance, clean the light fixture with a soft, damp cloth. Do not use paints, solvents, or other chemicals on this light fixture. They could cause a premature deterioration of the finish.

### RECHARGEABLE BATTERY

This product contains (1) 3.7V 18650 1800mAh Li-ion rechargeable battery. When the battery expires, it must be recycled or disposed of properly. Please contact your local waste disposal authority for correct procedure. Do not put battery into fire. Do not attempt to replace the battery

6

### Register & Subscribe today to protect your investment and join our email list!



### Why Register?

- Receive your extended warranty
- Get professional warranty support
- Be the first to hear the latest product news.
- Get exclusive deals delivered to you email.

Scan below for link:



homezonesecurity.com  
support@homezone-usa.com  
US: +1 888-762-5618

### Get exclusive offers and deals when you subscribe!

Thank you for choosing Home Zone Security!  
We are here to support you every step of the way.

Please be sure to contact our customer support for troubleshooting and register your product for additional benefits. Products must be sold by an authorized reseller or distributor to be valid.

<b>TEST RITE</b> PDS 540 File Information	Division: 110194201    File NO: 20210145	Packaging Design
Client: Amazon	Client ID: 10163408	Implementation Coordination
Item NO: 55865735	Package Size: 210x285mm	Sales Division
Package Description: AM	Finish Date:	Design Division
Contact: Al.wend@amazon.com	Color:	Applicant: Amy
Color: 110194201	Discard	Designer: Fanny

請注意，PDF檔僅供參考，請勿用於印刷，印刷請用AI檔。  
Attention: PDF file is ONLY for reference, DO NOT use for printing. Please use AI file for printing.

**PLEASE DO NOT PRINT THIS (YELLOW) AREA**