

INSTRUCTIONAL
VIDEOS




FRONT BASE LENGTH: 9ft-10-7/64in

SIDE BASE LENGTH: 2ft-6-45/64in

FRONT WALL HEIGHT: 5ft-10-55/64in

REAR WALL HEIGHT: 6ft-4-49/64in

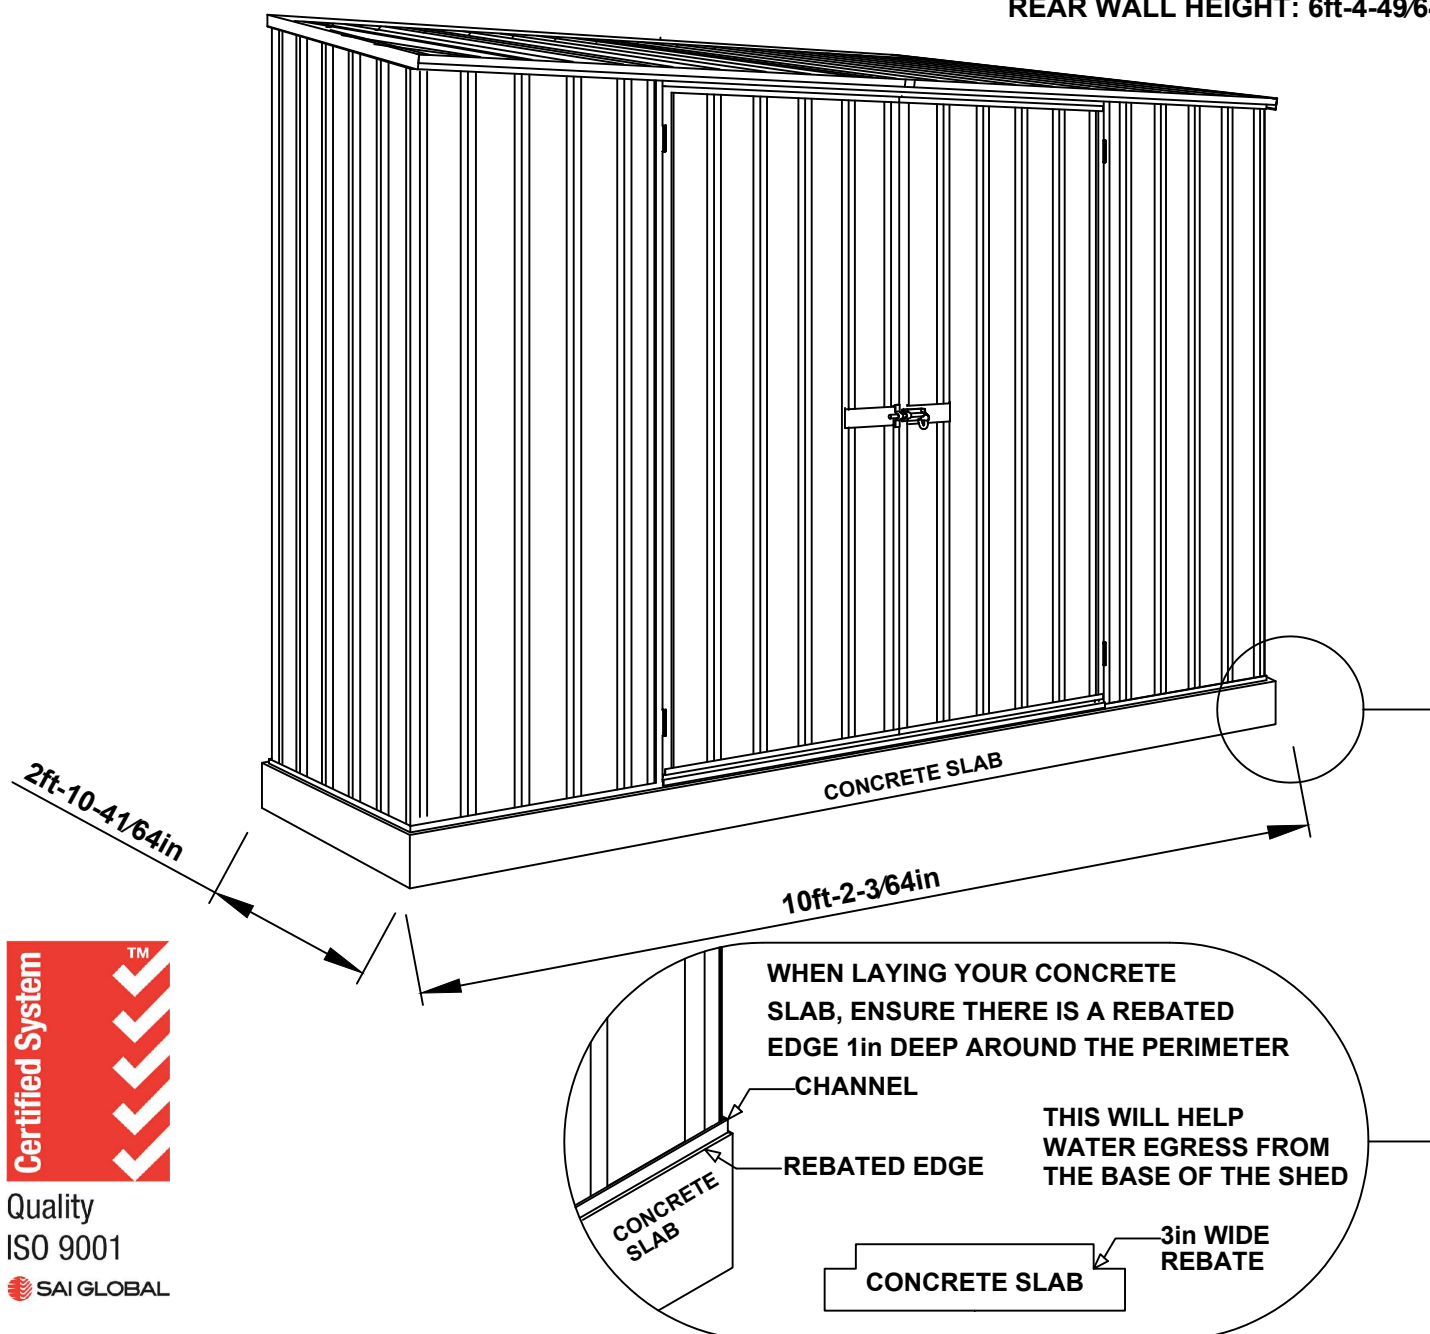

Quality
ISO 9001
SAI GLOBAL

We thank you for choosing an Australian made shed. For further assistance please visit our detailed instructional video library at www.abscosheds.com.au/USA or contact Customer Support: 800-305-4436.

At ABSCO Industries we are always looking to be number ONE, so please let us know what you think of our instructions. Feedback makes us better. feedback@abscos.com.au



GENERAL INSTRUCTIONS

- Before commencing any assembly, read through these instructions in detail to gain a thorough understanding of assembly methods and associated details.
- Unpack the carton and carefully identify and check off all the parts against the parts described and illustrated on pages three, four and five.

SITE PREPARATION

- The site for the shed must be level.
- It is recommended that the shed be set on a 4in concrete slab and anchored down appropriately (refer last page for details).

TOOLS REQUIRED



Normal Drills
No.30 and 11/64in



OPTIONAL



Normal 25/64in
Masonry 25/64in












A NOTE ON SAFETY

- Some parts may have sharp edges. It is advisable to wear gloves when handling these items and safety glasses if drilling holes. Sensible shoes are highly recommended.
- Do not erect your shed in windy conditions, ensure that the shed is securely anchored to a solid foundation immediately after construction is completed.
- It is highly recommended to erect the shed with two or more people.






COMPONENTS PACKING LIST - CHECK OFF ALL COMPONENTS

















QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
6	 CHANNEL JOINER L = 7-7/8in	CSJ					
↓ THESE COMPONENTS ↓ ARE TO BE JOINED ↓ TO THESE COMPONENTS ↓							
1	 CHANNEL L = 4ft-10-59/64in	55AL		1	 CHANNEL L = 4ft-10-59/64in	55AR	
1	 CHANNEL L = 4ft-10-59/64in	55CL		1	 CHANNEL L = 4ft-10-59/64in	55CR	
1	 CHANNEL L = 4ft-10-59/64in	55BL		1	 CHANNEL L = 4ft-10-59/64in	55BR	
1	 CHANNEL L = 4ft-10-59/64in	81BL		1	 CHANNEL L = 4ft-10-59/64in	81BR	
2	 CHANNEL L = 4ft-10-59/64in	81AL		2	 CHANNEL L = 4ft-10-59/64in	81AR	

**ALL SHEETS HAVE PART NO.S LOCATED ON
LOWER RIGHT OR UPPER LEFT CORNER OF
COLORED SIDE AS SHOWN**

















COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS

QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
2	 STEEL SHEET 6ft-3-25/64in Long 2ft-6-7/16in Wide	43B		2	 CHANNEL L = 2ft-6-15/64in	61B	
2	 STEEL SHEET 6ft-3-25/64in Long 2ft-6-7/16in Wide	43C		2	 CHANNEL L = 2ft-6-7/16in	81J	
1	 STEEL SHEET 6ft-3-25/64in Long 2ft-6-7/16in Wide	X4L		1	 CHANNEL L = 5ft-1-47/64in	79A	
1	 STEEL SHEET 6ft-3-25/64in Long 2ft-6-7/16in Wide	X4R		2	 CHANNEL WITH HINGES L = 5ft-7-29/32in	58A	
4	 STEEL SHEET 6ft-3-25/64in Long 2ft-6-7/16in Wide	43D		1	 CHANNEL L = 5ft-7-29/32in	58B	
2	 STEEL SHEET 5ft-10-9/32in Long 2ft-3-63/64in Wide	34A		4	 CHANNEL L = 2ft-6-7/16in	58C	
1	 STEEL SHEET 5ft-7-29/32in Long 2ft-6-7/16in Wide	A		2	 JAMB L = 5ft-10-9/32in Part No. Here	89A	
1	 STEEL SHEET 5ft-7-29/32in Long 2ft-6-7/16in Wide	B		220	 PLASTIC SCREW CAPS		




COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS

QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
2	 LIP TRIM L= 2ft-10-1/16in	88B		1	 JAMB L= 5ft-1-47/64in	90A	
1	 JAMB L= 5ft-7-29/32in	89C		4	 JAMB L= 3ft-8-3/32in	91A	
CONTENTS OF FITTINGS PACKET							
220	 SELF TAPPING SCREWS			3	 DOOR PADBOLT	22A	
8	 8/32in NYLOC NUT & BOLT SET SECURE TWO PADBOLTS TO DOOR SHEET			2	 DOOR PADBOLT HASP		
12	 8/32in CSK SCREW & NUT SECURE HINGES TO DOOR			2	 DOOR STRAP L: 6.5in	12A	
1	ASSEMBLY INSTRUCTIONS			1	 No. 30 & 11/64in DRILL BIT		
				1	 PHILLIPS HEAD DRIVER BIT		




INSTRUCTIONS FOR JOINING SPLICED CHANNELS

NOTE: THE TEXT MARKED ON ALL PARTS MUST BE SHOWN ON THE SAME SIDE AS EACH OTHER.

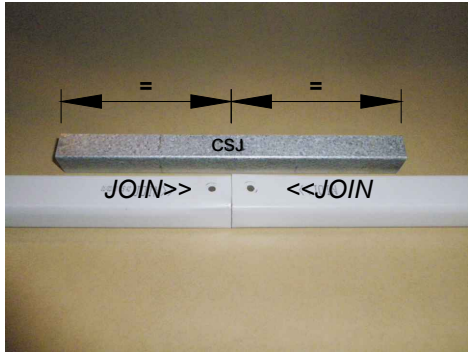



STEP 1.

Position the channels and the CSJ joiner channel so the center of the CSJ is in line with the end of each channel to be joined together.

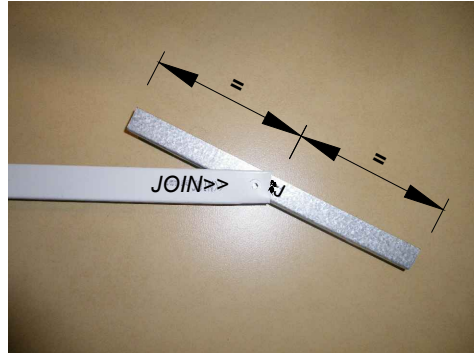


STEP 2.

Join the first channel to the CSJ by inserting the center of the CSJ (on an angle) to the end of the channel where the JOIN>> text is marked. Push down one side of the CSJ until you hear a 'click'.

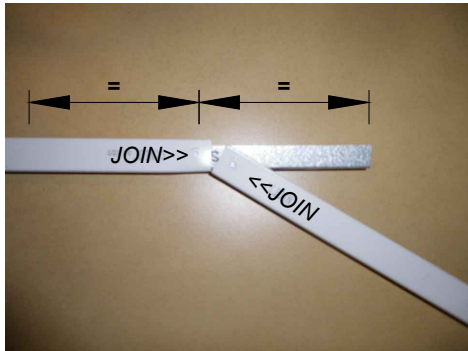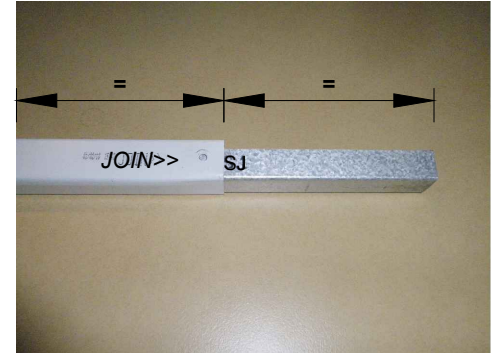

STEP 3.





Join the second channel to the CSJ by positioning the <<JOIN end of the channel at the center of the CSJ (on an angle). Push the CSJ into the channel until you here a 'click'.

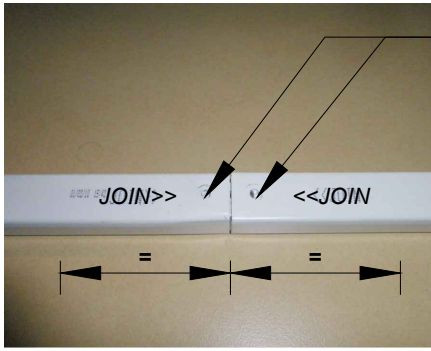

FINISHED CHANNEL

The joined channels should now look like the picture above with the CSJ positioned equally inside of the joined channels.


DRILL 4 (2 PER A SIDE) HOLES TO SECURE SECTIONS TOGETHER USING NO. 30 DRILL. (THESE SCREWS MAY HAVE TO BE TEMPORARILY REMOVED AND REPLACED DURING LATER ASSEMBLY)

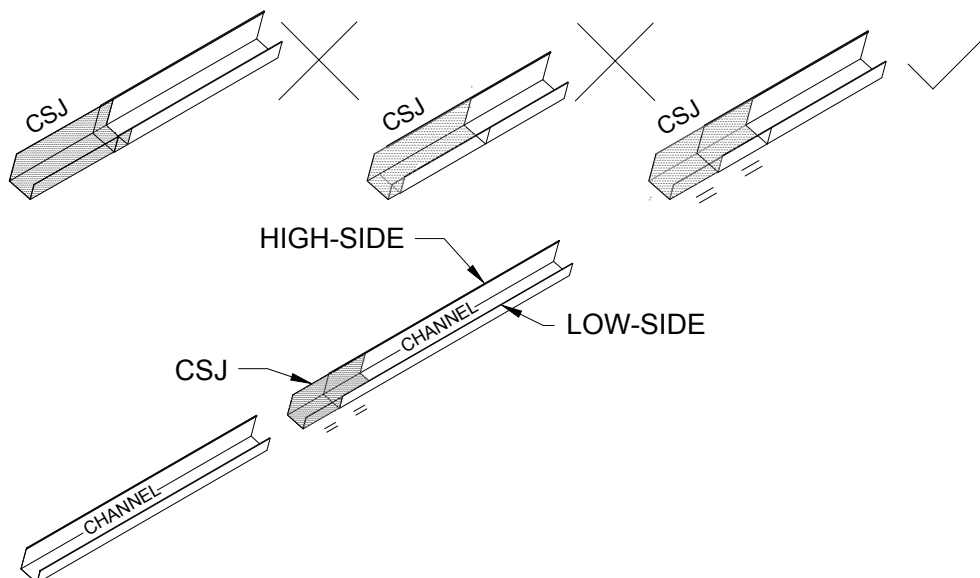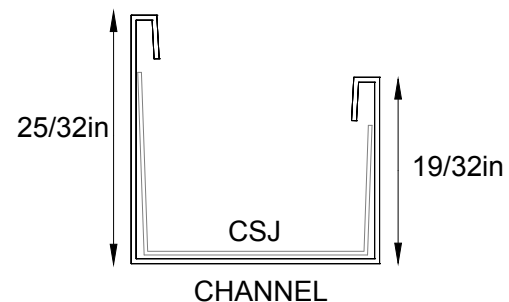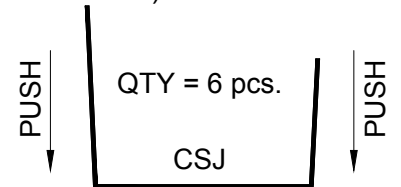




STEP 1. PRE-ASSEMBLY OF SPLICED CHANNELS


NOTE: JOIN TOGETHER 12 X CHANNEL SECTIONS USING 6 X CHANNEL JOINERS (PART CSJ)

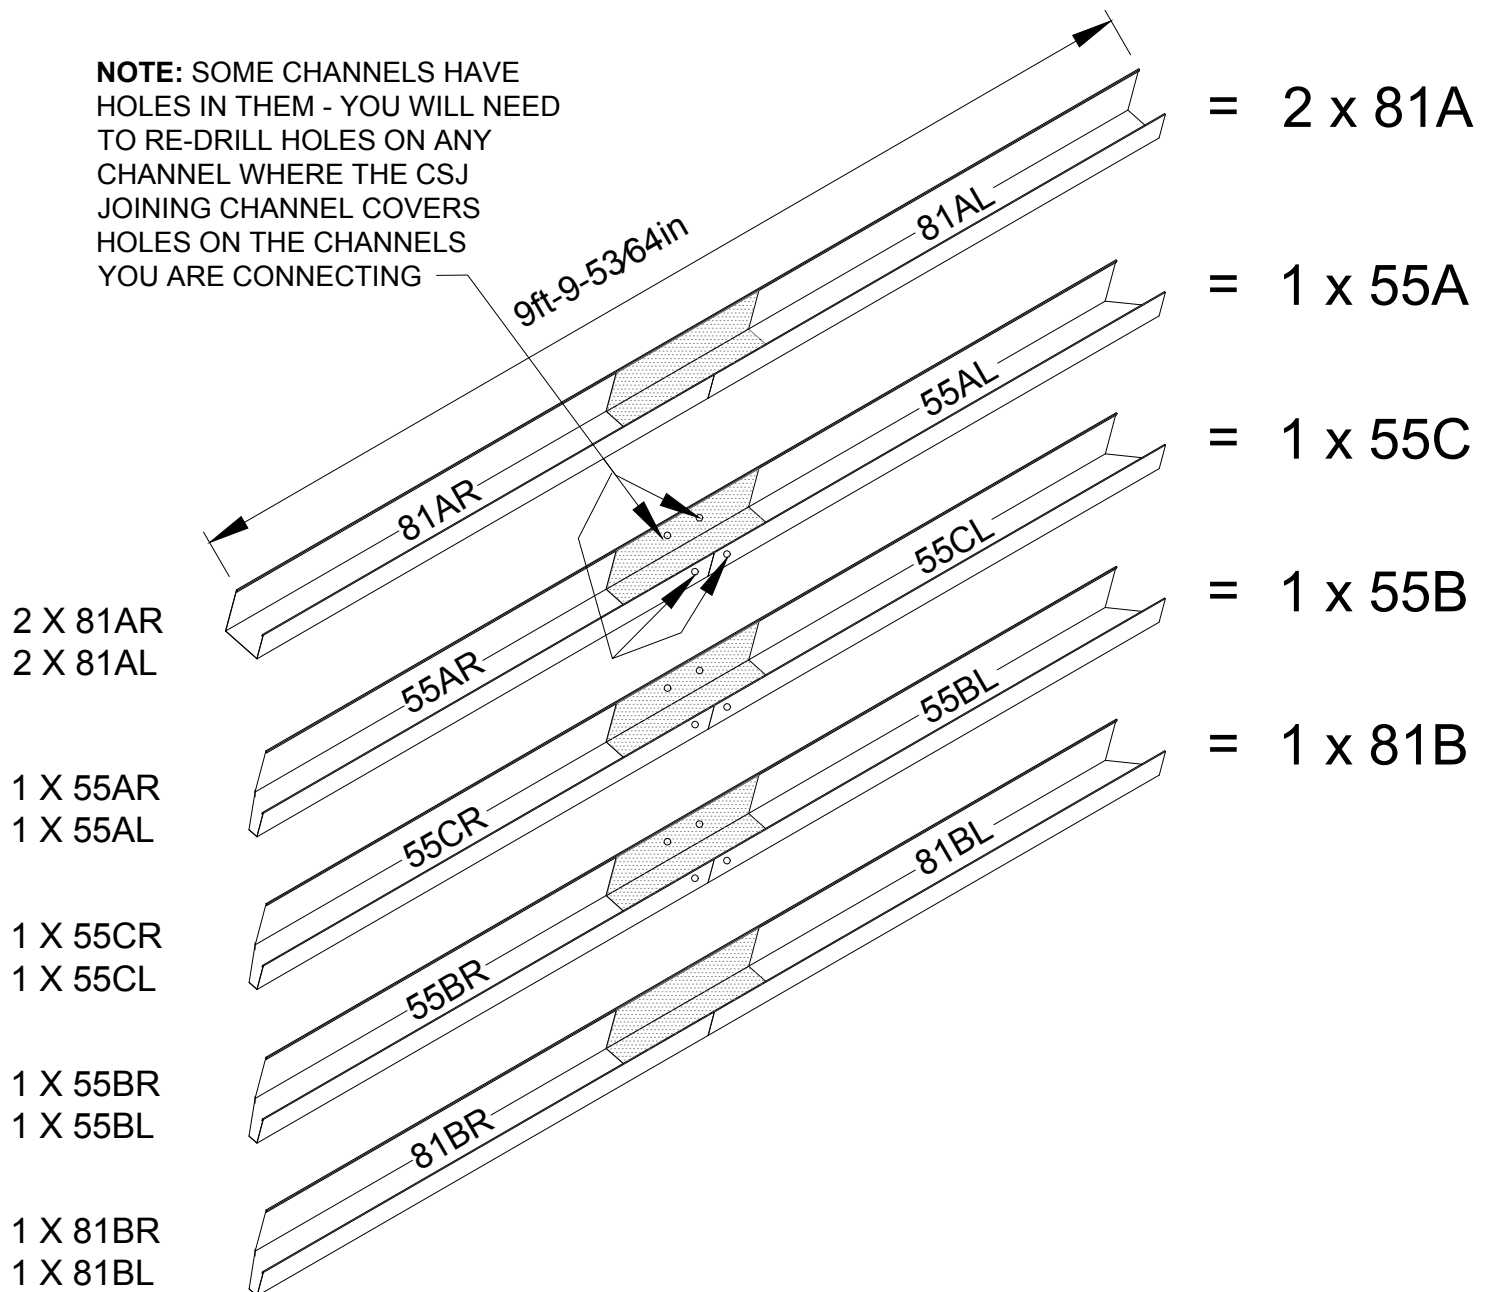



VIEW OF ROOF COMPONENTS

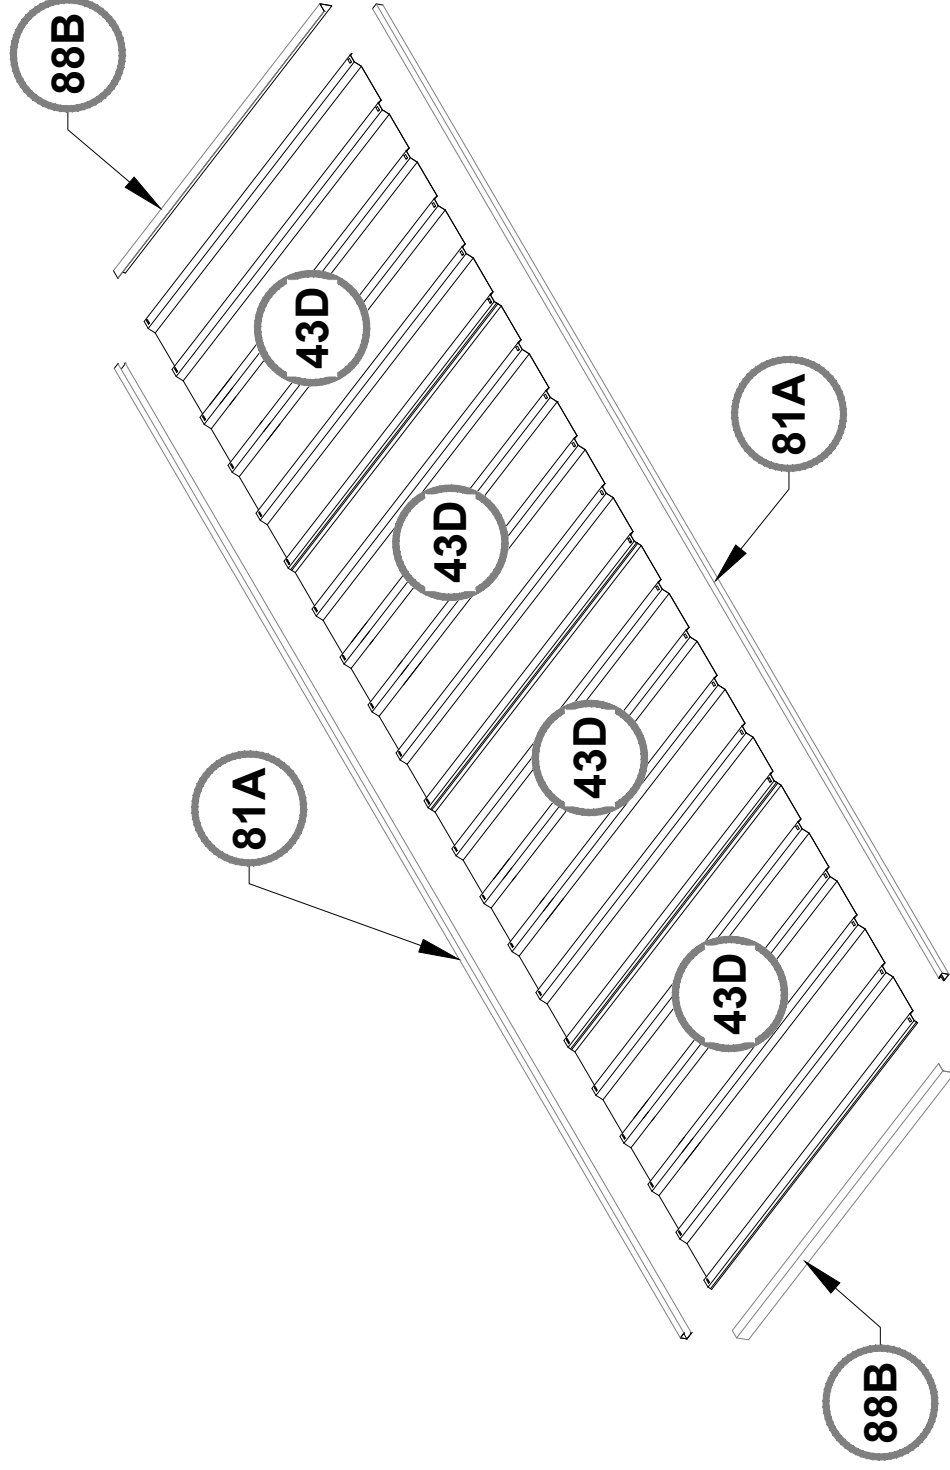

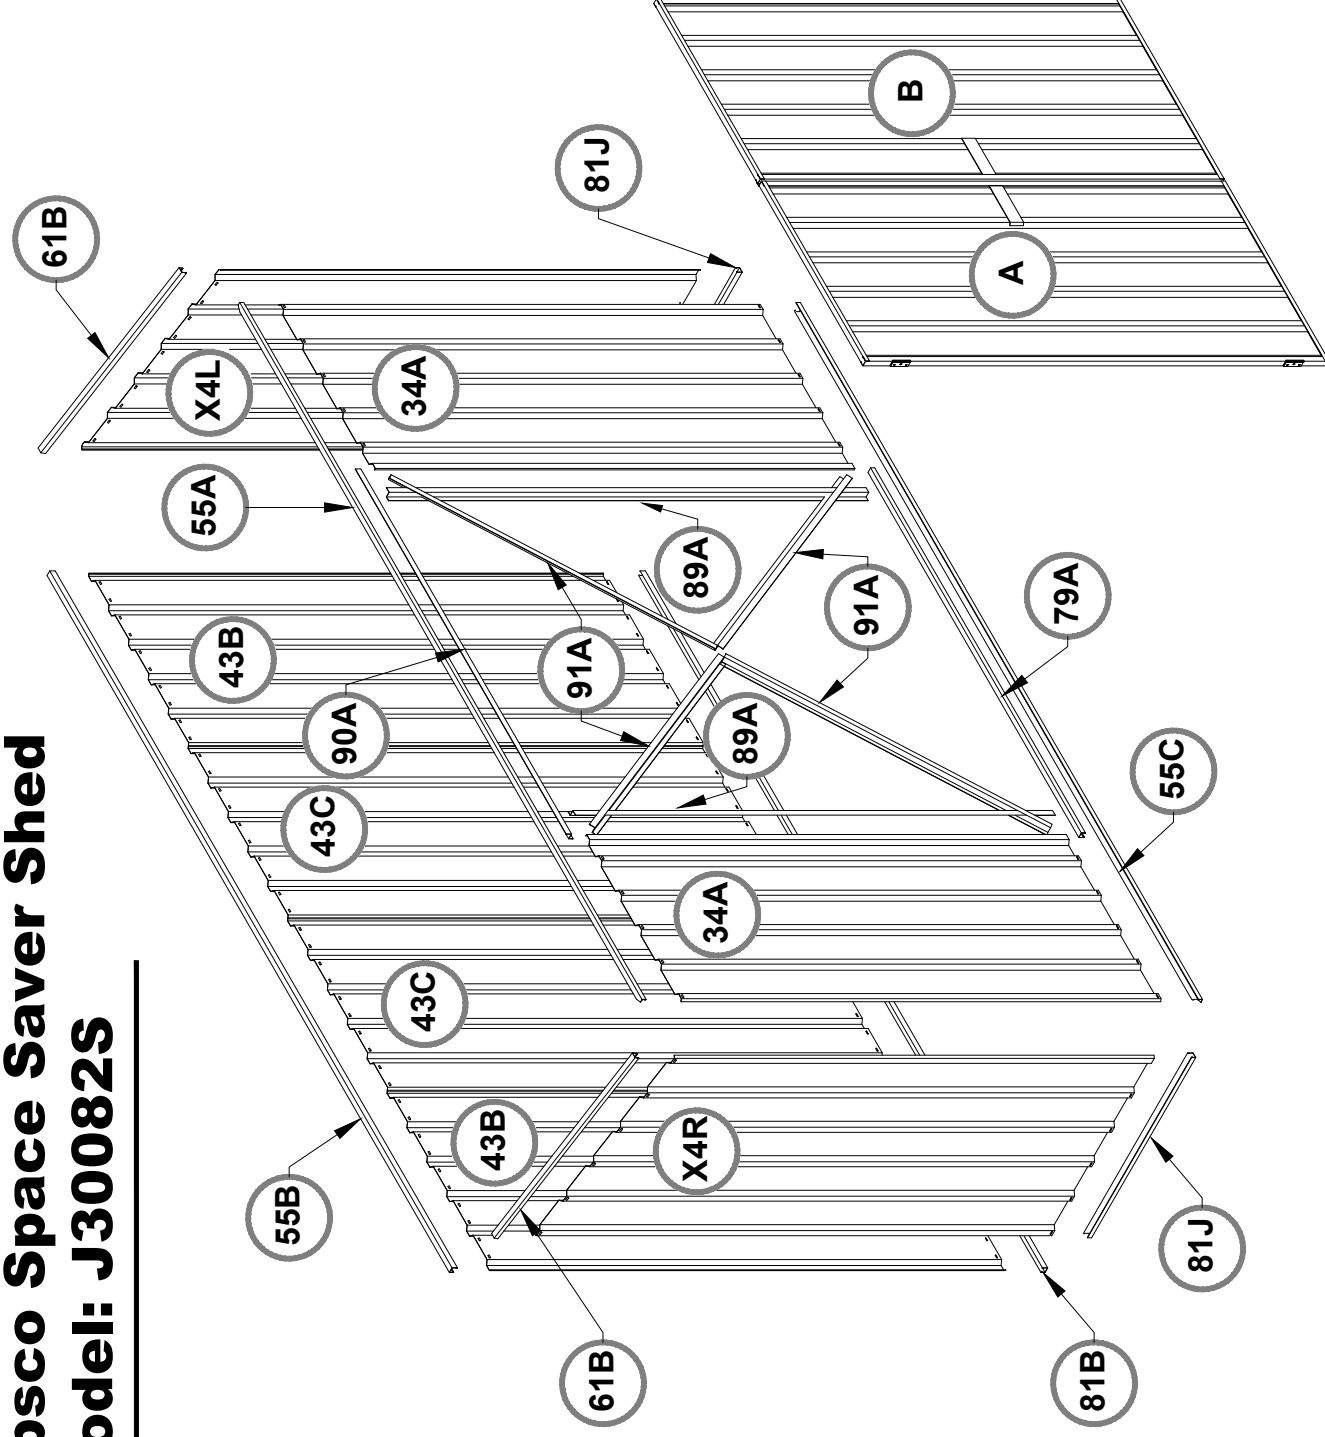


VIEW OF WALL COMPONENTS










ABSCO ASSEMBLY INTRODUCTION

The snap-tite assembly system locks most perimeter channels to all roof and wall sheets without the need for tools and fasteners.

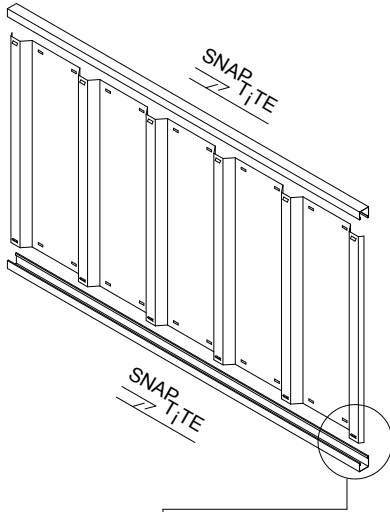


To pre-assemble the four wall panels and two roof panels, the perimeter channels are secured to the top and bottom of each panel using the snap-tite system, as detailed on the following pages wherever you see the symbol.

SNAP TITE

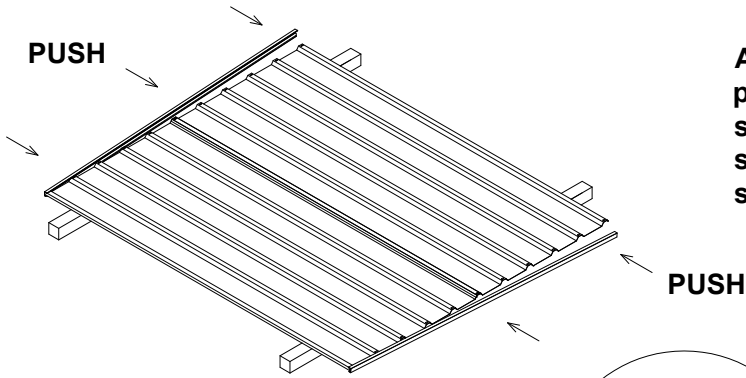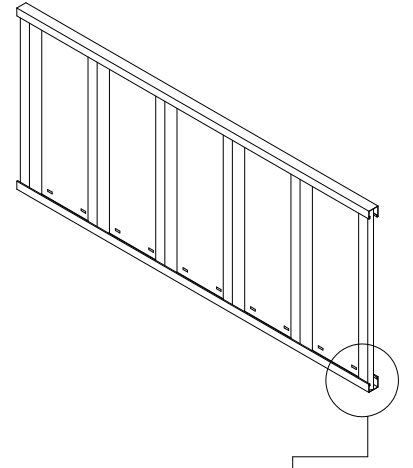


After joining sheets together, position channel over one end of the sheets, gently tapping it over the snap-tite lugs, working along the sheets to the other end.

Position sheets on timbers, trestles or partly over edge of concrete slab.




Each perimeter channel must finish flush with the edges of the sheets. the snap-tite system allows adjustment for this process by simply tapping the channel along the sheets until each end is neatly flush.

FASTENING SYMBOLS



Join components together with one screw at this location only, as some channel sections have extra holes that are not required for this model of garden shed



Do not join components together at this location yet, as the screw may obstruct further assembly of other components



8/32in NUT & BOLT SET





Once constructed place screw caps over fasteners





1. REAR PANEL ASSEMBLY

LAY SHEETS OUT AS SHOWN

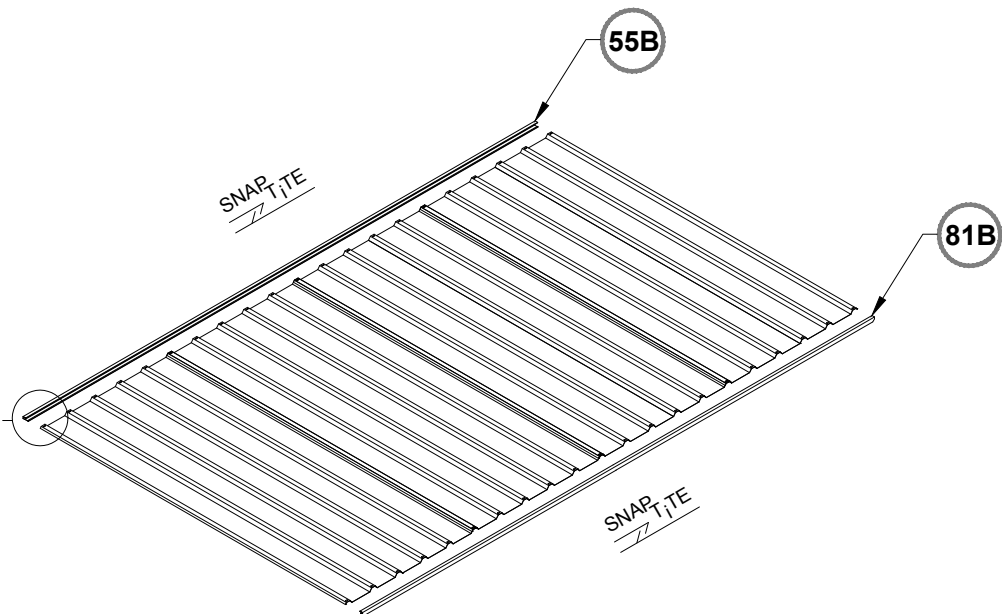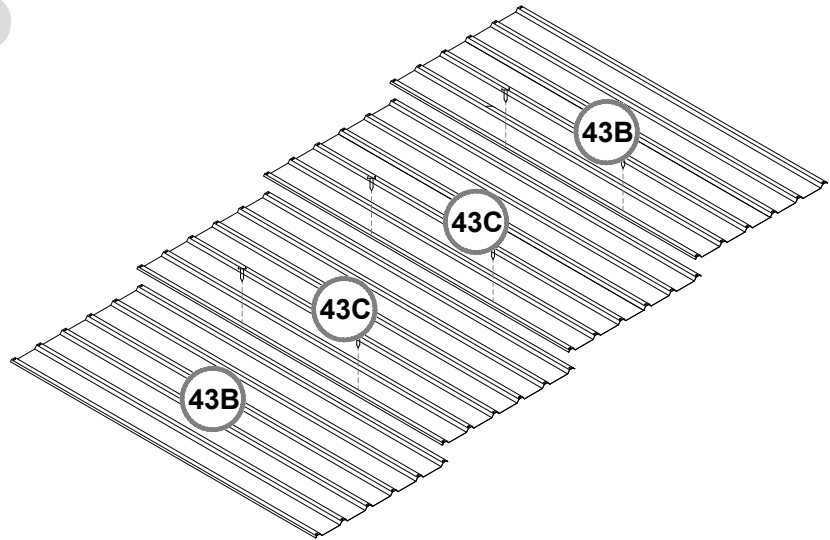

ATTACH 55B CHANNEL WITH NOTCHED END AS SHOWN






2. SIDE PANEL ASSEMBLY

(TWO REQUIRED)

LAY SHEETS OUT AS SHOWN

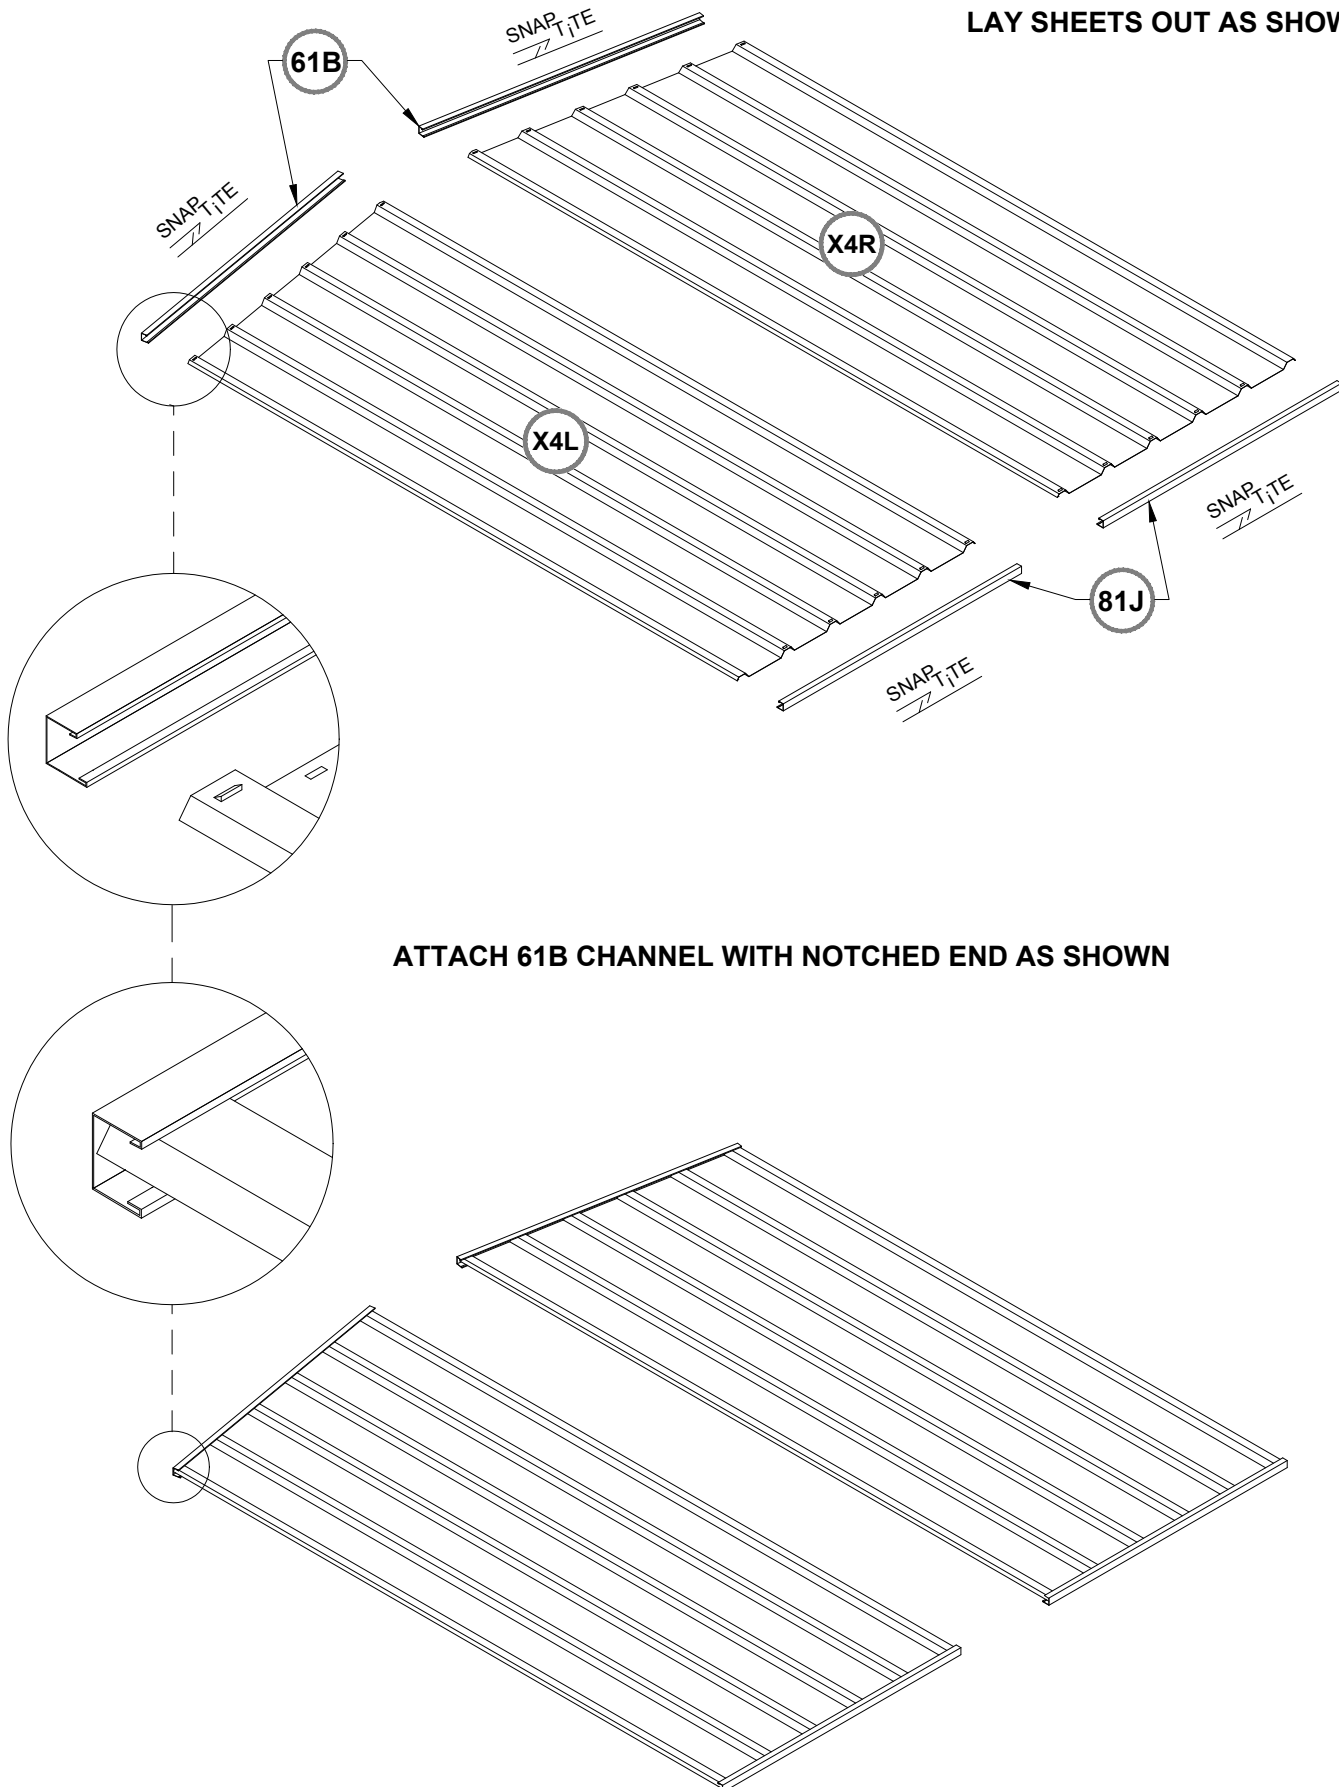


ATTACH 61B CHANNEL WITH NOTCHED END AS SHOWN




3. ROOF PANEL ASSEMBLY

LAY SHEETS OUT AS SHOWN

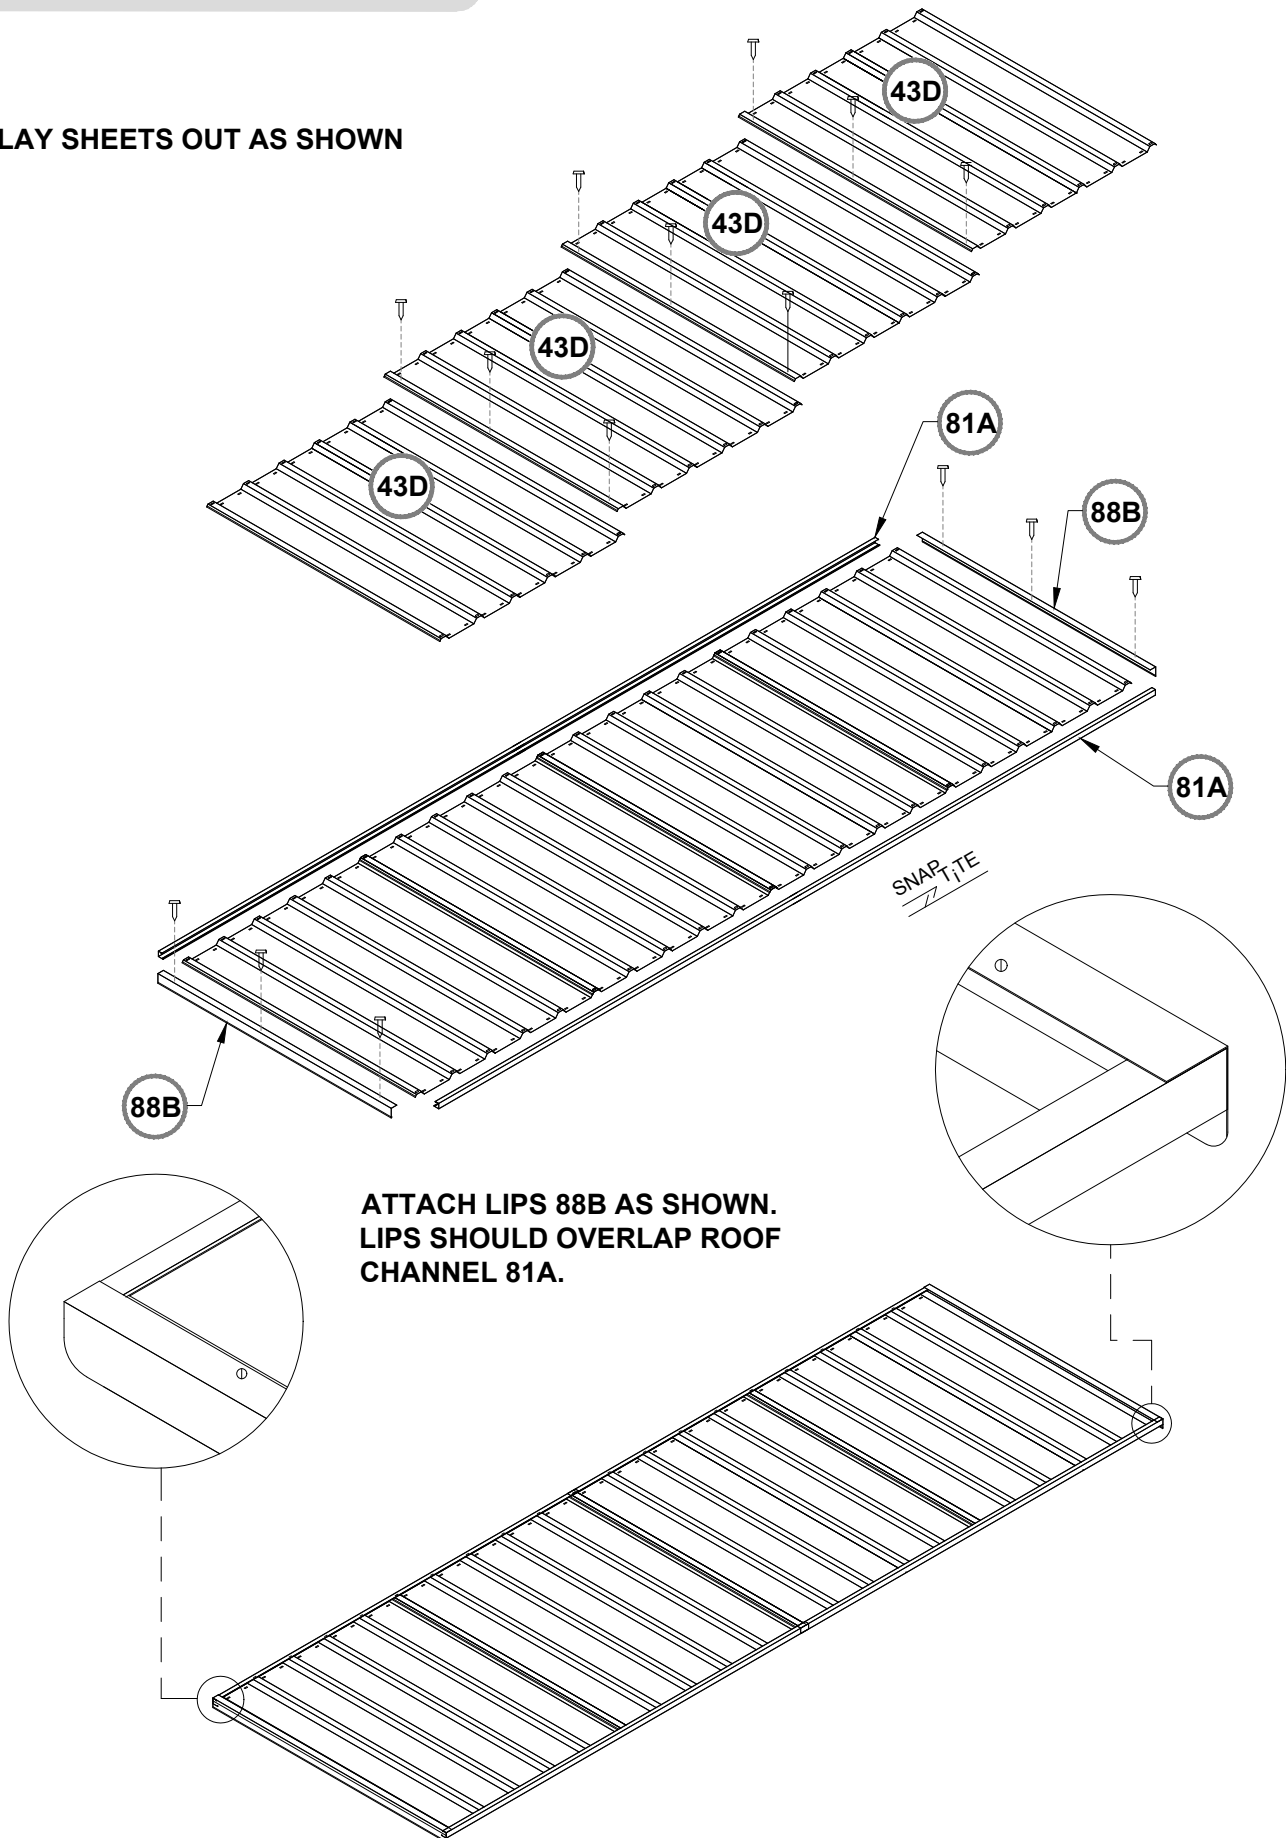




4. DOOR PANEL ASSEMBLY

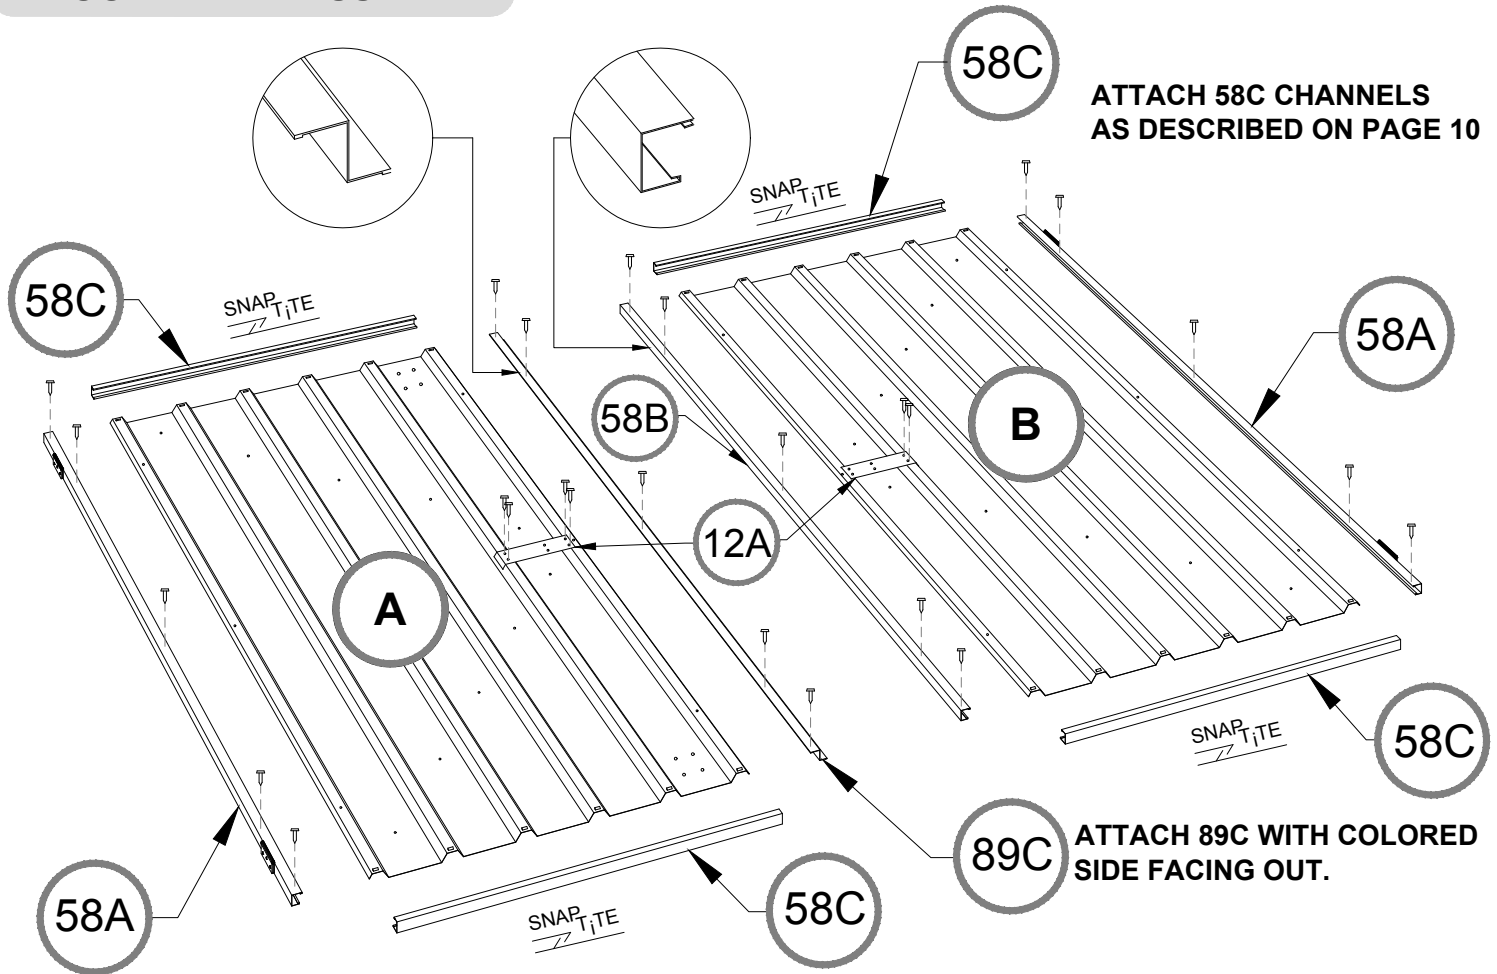


ATTACH 58A AND 58B TO SHEET B SO THAT THE 25/32in SIDE OF THE CHANNELS ARE ON THE OUTSIDE OF SHEET B

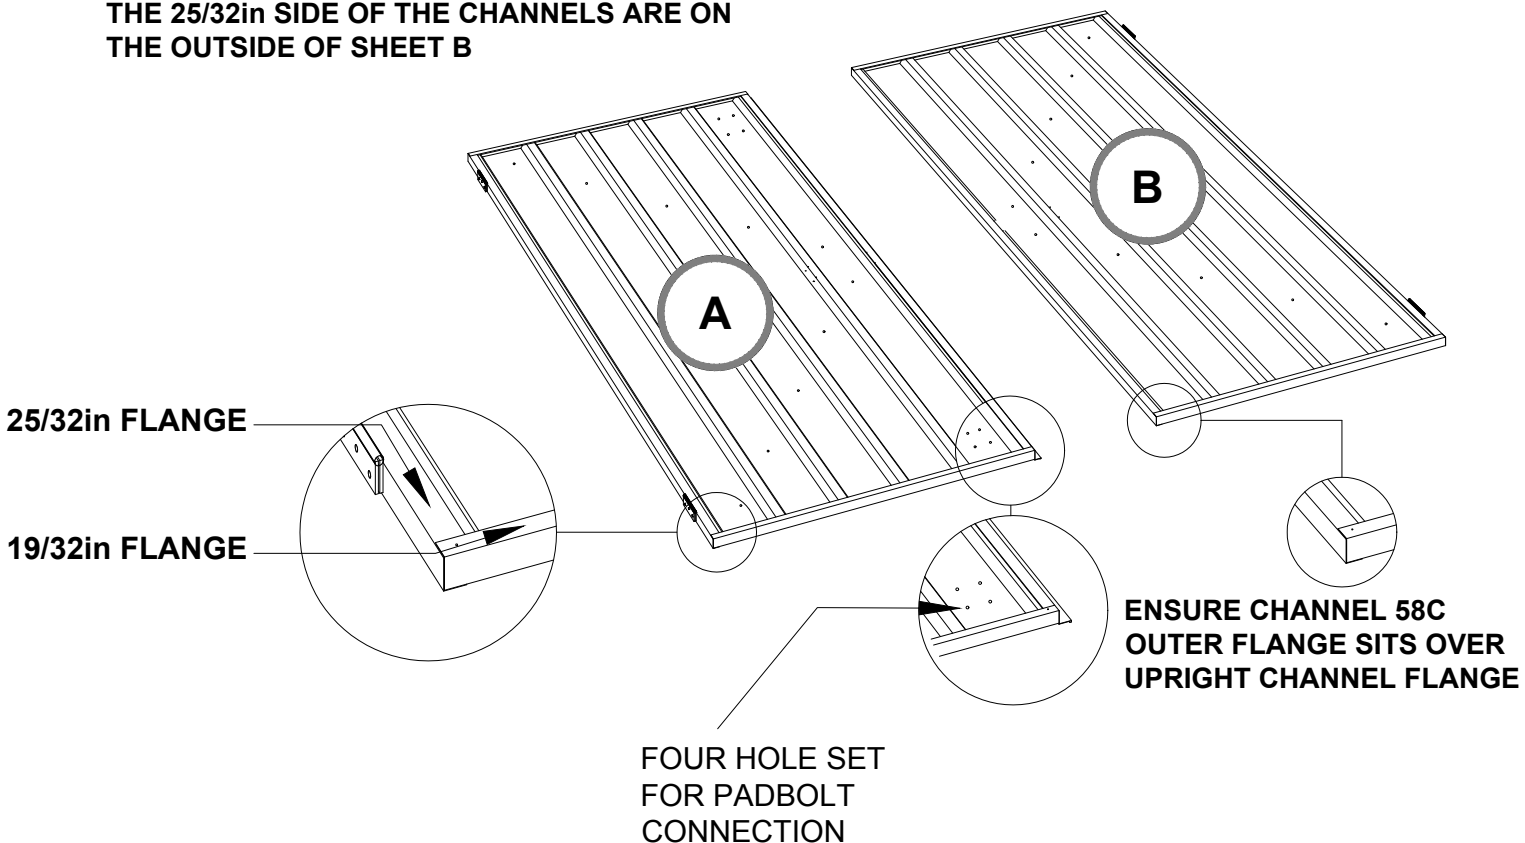




5. FRONT PANEL ASSEMBLY

LAY SHEETS OUT AS SHOWN




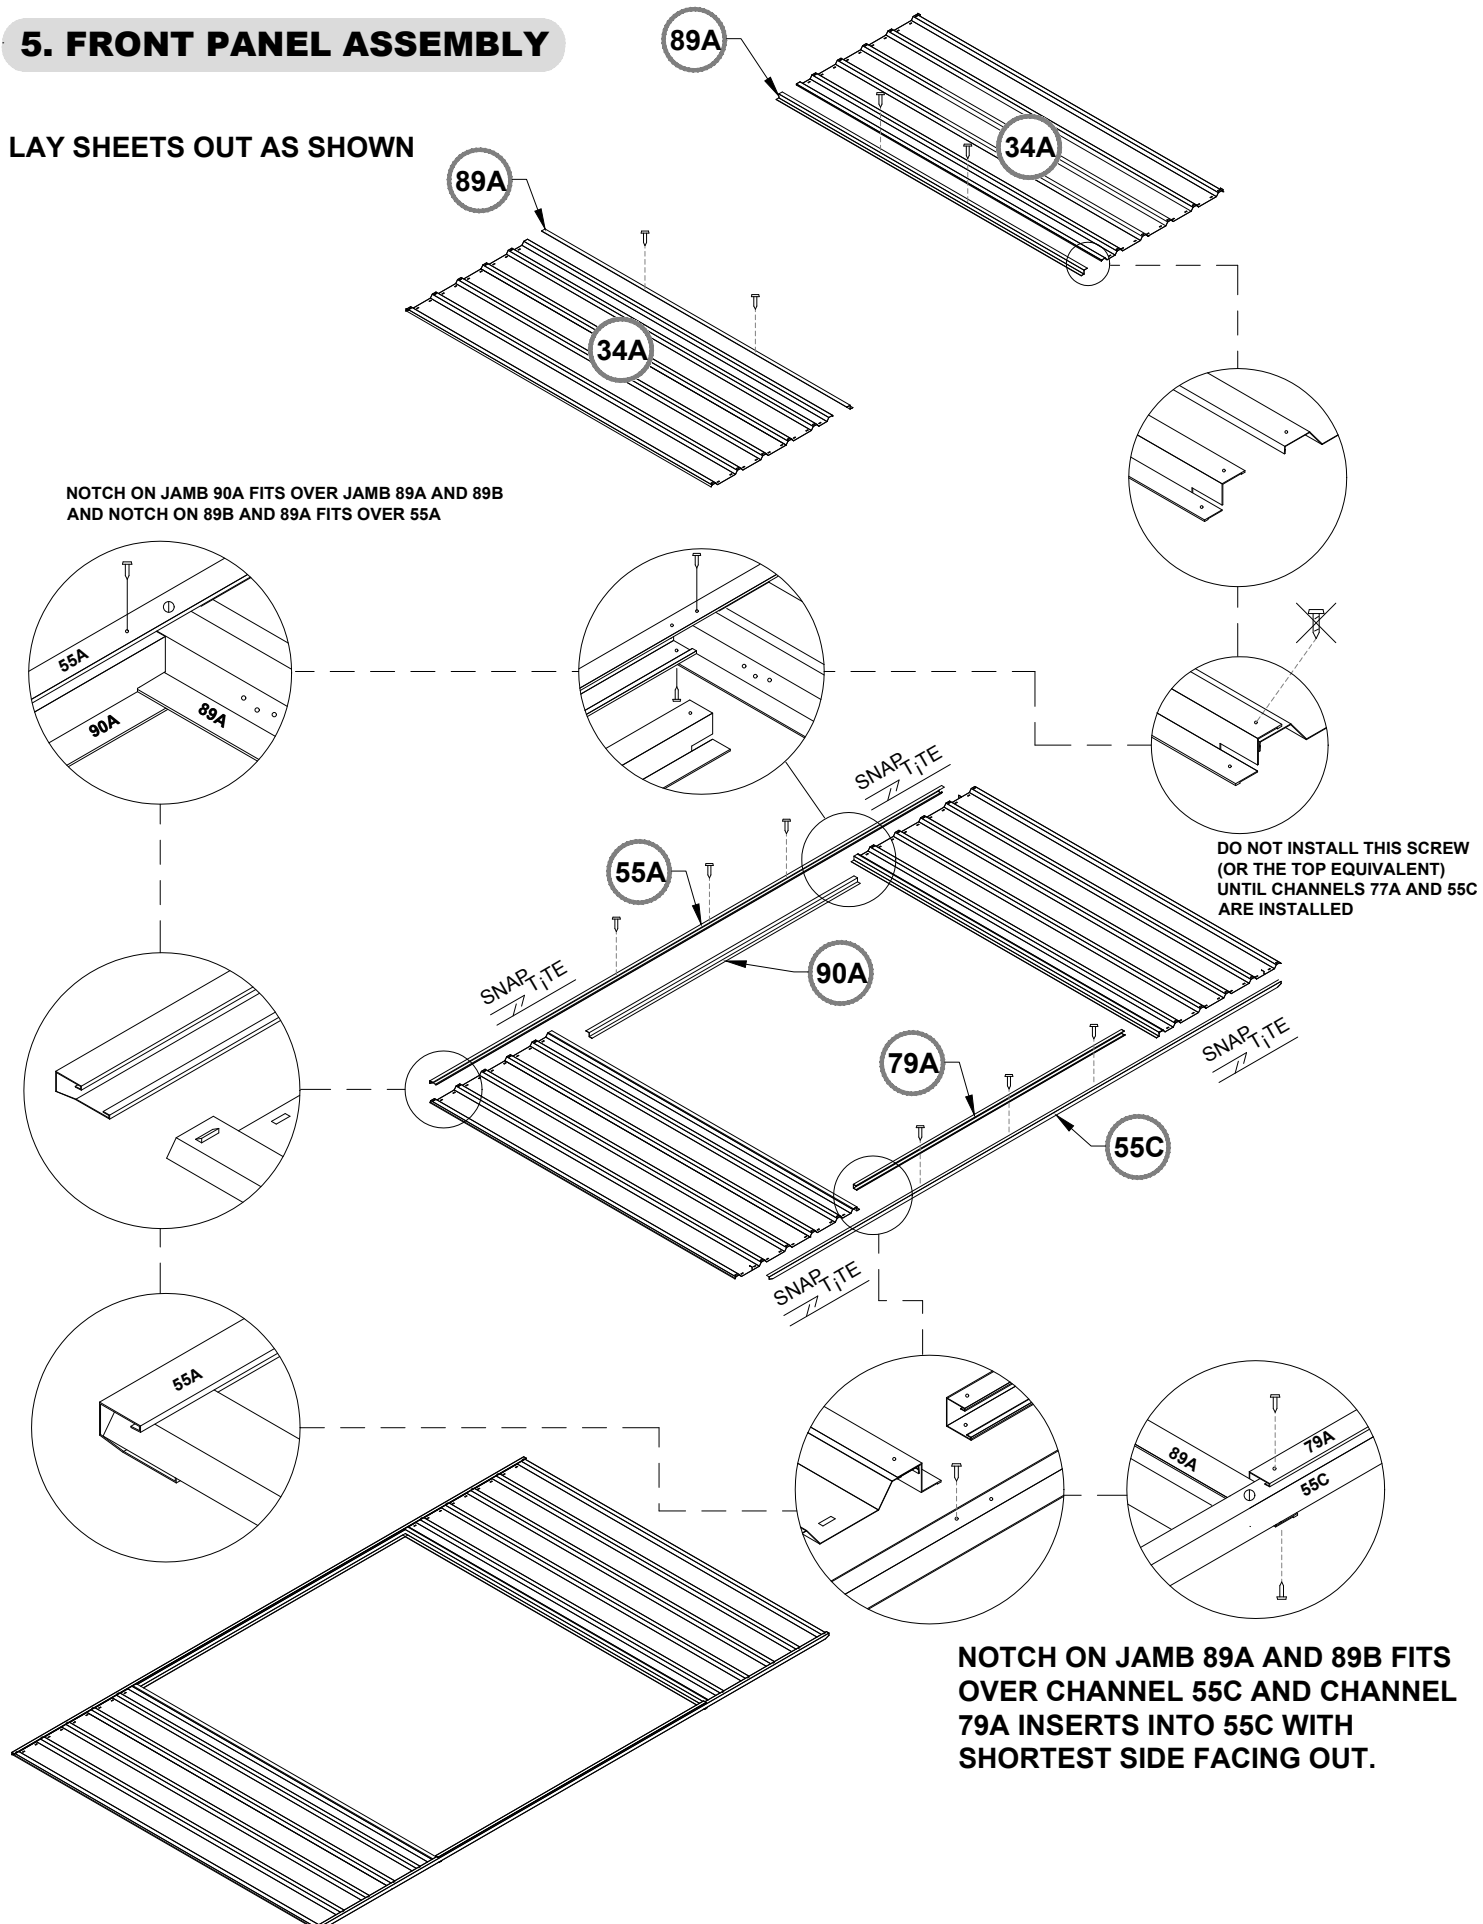







6. DOOR PANEL ASSEMBLY

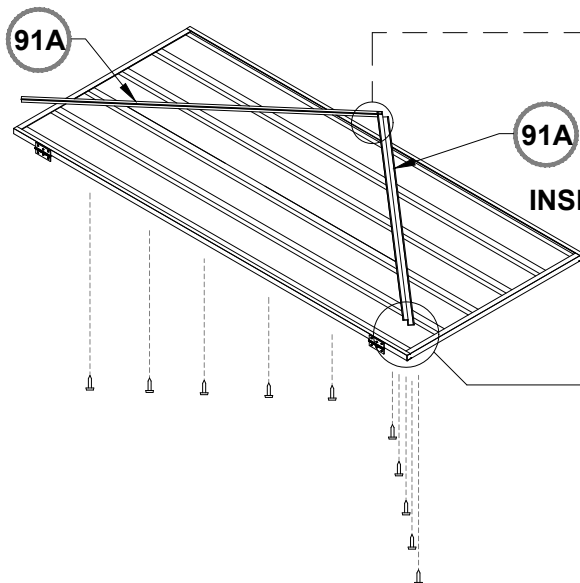


INSERT 91A JAMBS UNDER THE CHANNELS AROUND THE DOOR

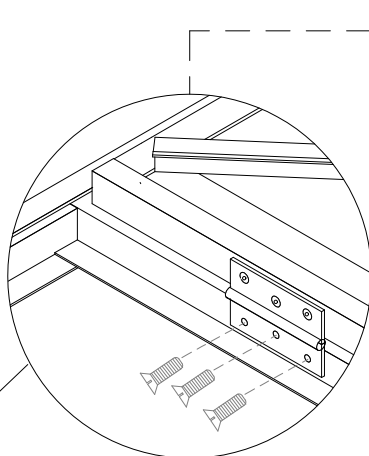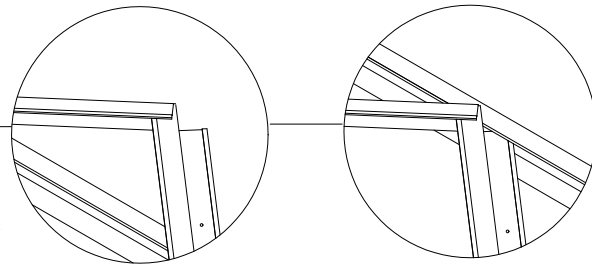

NOTE: 8/32in CSK Nuts and bolts (supplied) will require enlarging the hinge hole using a 11/64in drill bit

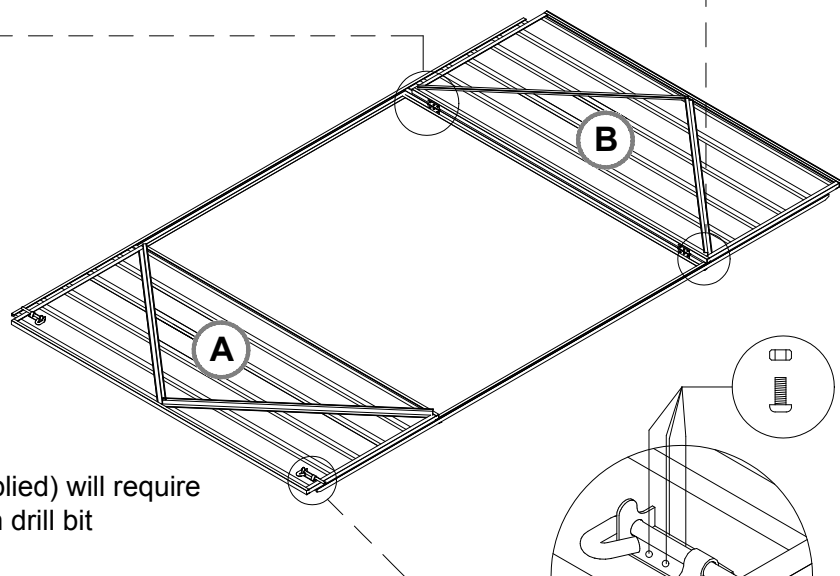

USE 4 x 8/32in NYLOC BOLTS
TO SECURE PADBOLT TO
DOOR

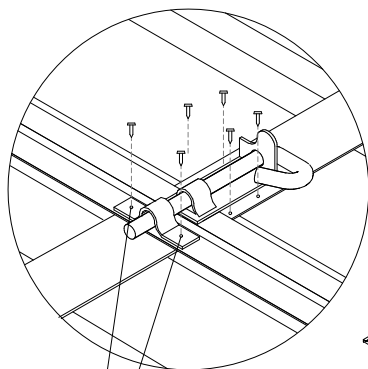


NOTE: The two holes required to connect the padbolt hasp for each door have not been pre-punched, to allow for proper alignment. position each hasp centrally over the padbolt shaft, and drill holes with No. 30 Drill and secure with screws





PANEL CONSTRUCTION

NOTE: Take care to ensure that both front and rear wall panels are not positioned upside down. The top channel of each panel is pre-punched for attaching roof sheets. The base channels are not pre-punched.

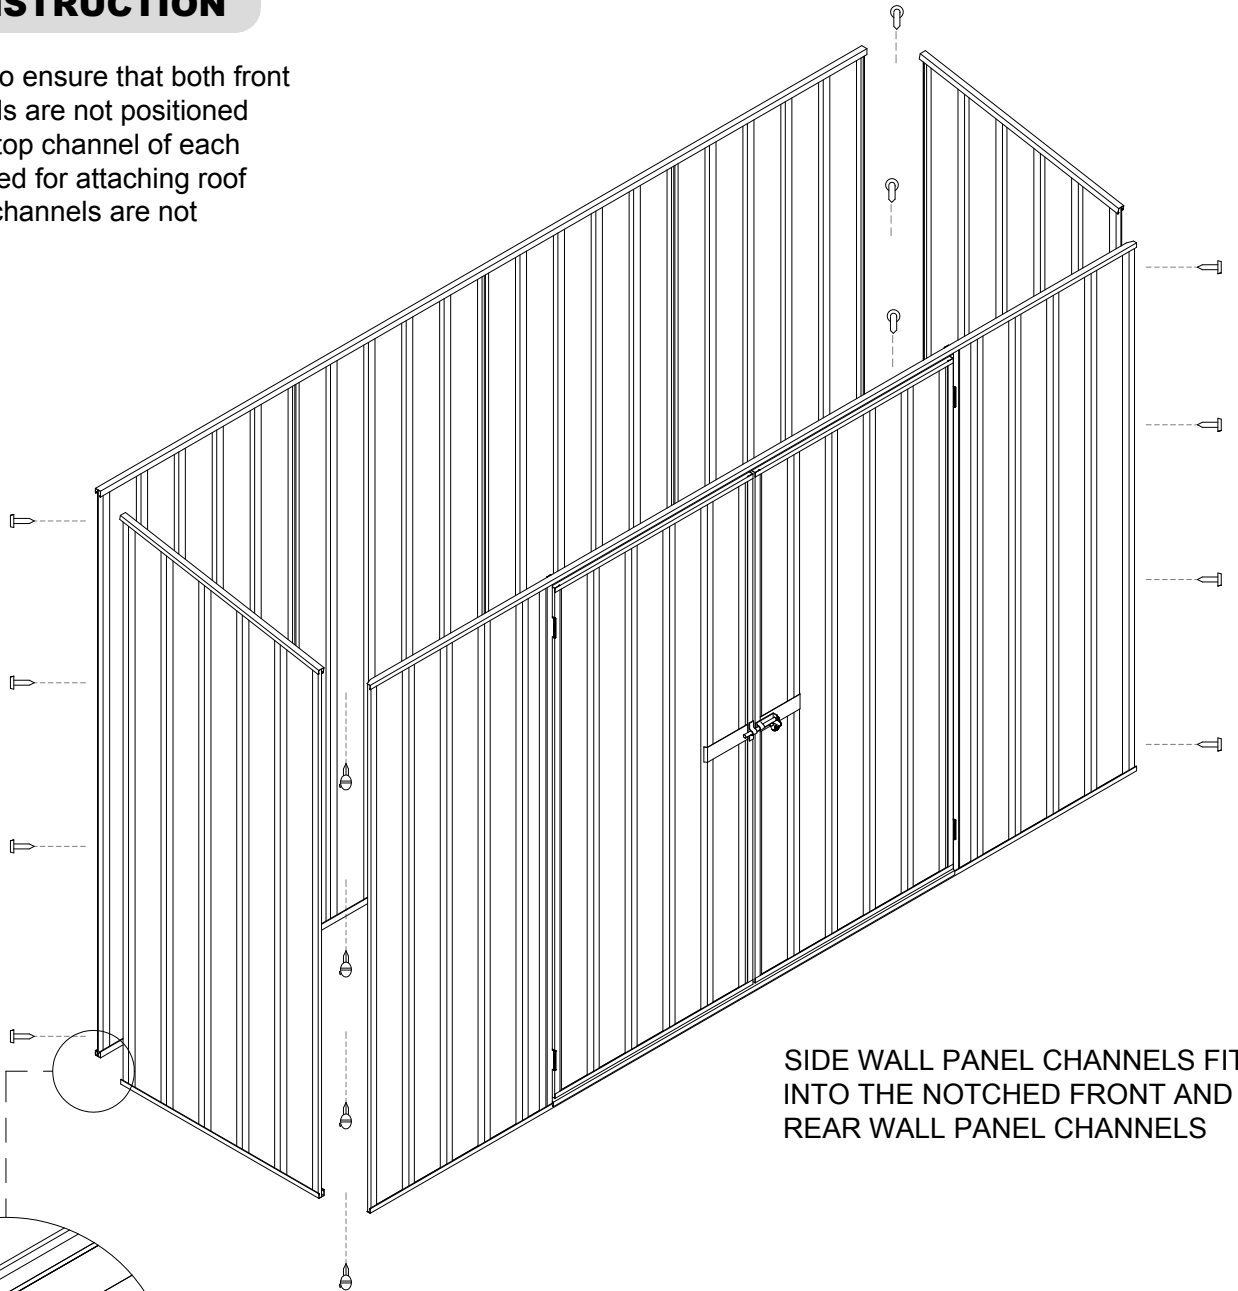



SIDE WALL PANEL CHANNELS FIT INTO THE NOTCHED FRONT AND REAR WALL PANEL CHANNELS





FINAL CONSTRUCTION

ANCHORING OF SHED

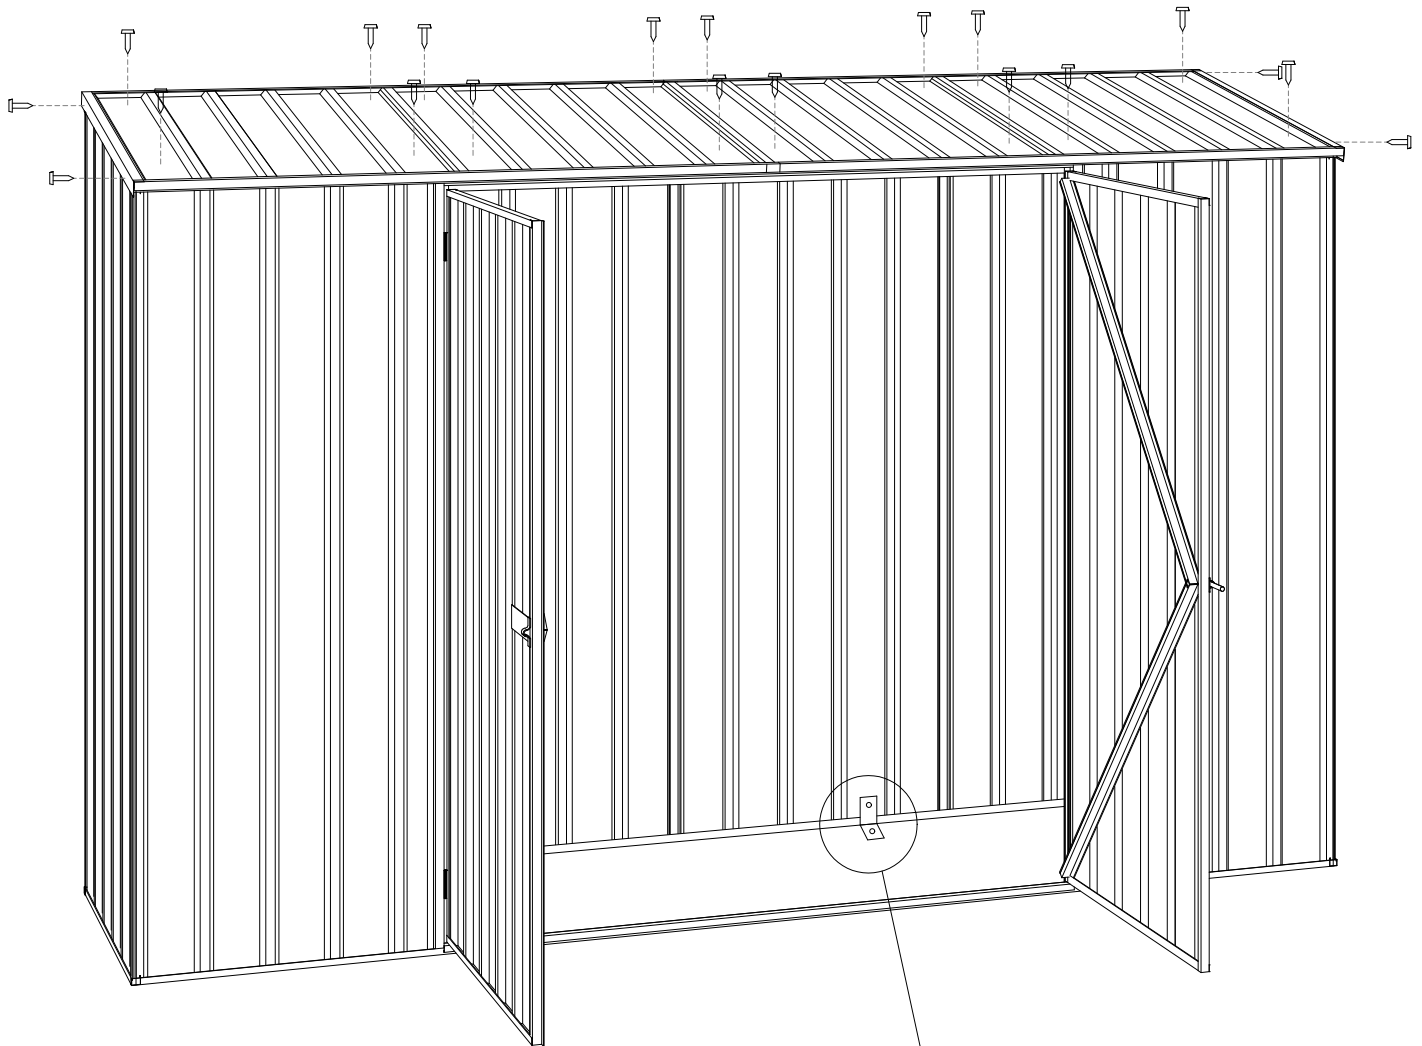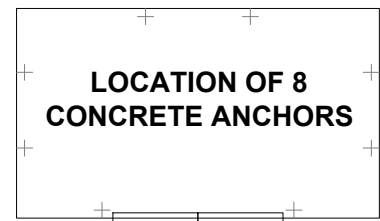

- EACH ANCHOR CONSISTS OF ONE NUT, BOLT, DYNABOLT AND STEEL ANGLE
- DRILL A 25/64in HOLE INTO THE WALL SHEET
- DRILL A 25/64in HOLE INTO THE CONCRETE

