


Panelized Installation Instructions

Assembly Hardware Included

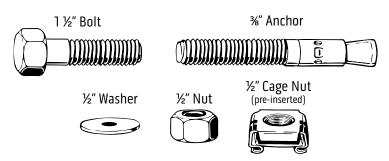

	4x4	4x6	4x8	6x4	6x6	6x8	8x4	8x6	8x8	
1½" Bolt	84	108	132	106	132	158	132	158	184	2
%" Anchor	16	20	24	20	24	28	24	28	32	5
½" Washer	156	196	240	192	240	288	240	288	336	3
½" Nut	68	88	108	86	108	130	108	130	152	
½" Cage Nut	16	20	24	20	24	28	24	28	32	ة [

Tools Needed

Hammer ¾" Socket & Ratchet Torque Wrench ¾" Wrench ¾" Masonry Bit Hammer Drill

- **1** Start with any **B** corner by placing it in the preferred corner for installation.
- 2 Attach adjacent A panel to B corner using the 1 ½" bolts with a washer on both the bolt and nut sides. Do not tighten, yet.
- 3 Proceed with remaining panels until finished as shown in diagram. Add or subtract 2' A panels to create size of building purchased.

If you have A/V (audio/video) panels, they can be substitued in any of the A panel locations.

- 4 Install the roof J panels. The roof's square holes will have cage nuts on the outside. Use 1 ½" bolts and washers from the inside. Do not tighten.
- 5 Straighten and square walls. Using ¾" socket and wrench, tighten and torque bolts as you square up. Tighten and torque roof.
- 6 Using a 3/8" masonry bit, drill 4" deep holes at the anchor hole locations. Tap in wedge anchors in holes.
- 7- Put washer and nut on anchor and tighten to manufacturer-recommended 25 lbs. torque.

