


## Submitted Model No.: Specific Features:

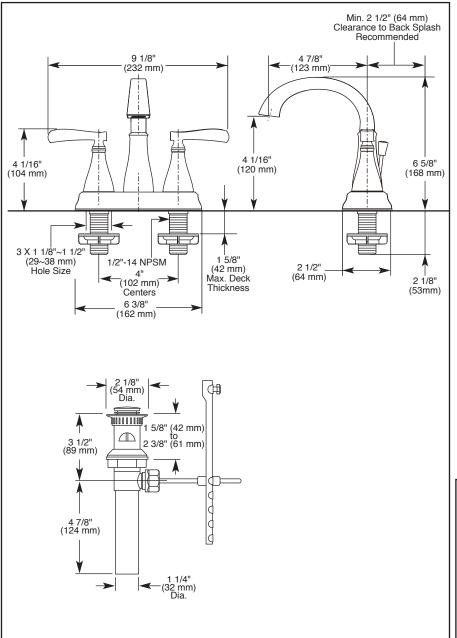

Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

# \Lambda DELTA LAVATORY FAUCET

- Olmsted<sup>™</sup> Bath Suite
- Two Handle Deck Mount
- 3 Hole Sink Applications
- 4" Centerset

### **STANDARD SPECIFICATIONS:**

- Two handle lavatory faucets for exposed mounting on 3 hole sinks with 4" centers.
- 4" (102 mm) centerset.
- 4 7/8" (123 mm) long, 6 5/8" (168 mm) high spout.
- Hot and cold stems are interchangeable.
- All operating parts are replaceable from the top.
- 1/4 turn handle stops.
- 1/2"-14 NPSM threaded male inlet shanks. • Control mechanism is a rotating cylinder type with stainless steel plate and 90° rotation, with
- replaceable non-metallic seats. Maximum flow rate 1.5 gpm @ 60 PSI.
- Models have drain with pop-up type fitting with plated flange and stopper.

#### WARRANTY


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries



#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to
- EPA WaterSense<sup>®</sup>

Verified compliant with 0.25% weighted average Pb content regulations.



FAUCET COMPANY

55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1 © 2013 Masco Corporation of Indiana