



**INSTALLATION INSTRUCTIONS**  
**5" & 6" RETROFIT TRIM**  
**MODELS: EVL61091T50WH & EVL61093T50WH**

**QUESTIONS? CALL TOLL FREE**  
**1-855-573-6156 or EMAIL**  
**INFO@ENVIROLITE-LED.COM**

**WARNING – RISK OF ELECTRIC SHOCK. DISCONNECT MAIN POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING THE FIXTURE.**

**GENERAL:** All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

**FOR USE WITH HOUSING MODELS:**


**INCANDESCENT HOUSINGS – COMMERCIAL ELECTRIC** HBR5ICAT, HBR5ICRAT, HBR5, HBR5R, HALO H5T, H5RT, H5ICT, H5RICAT, C7IC, C7ICR, C7ICA, C7ICRA, C7, C7R, C7S, HBR5000SIC; **HALO** H7ICT, H7RICT, H7ICAT, H7RICAT, H7T, H7RT, H27ICT, H27T, H27RT, H750ICAT, H750RICAT; **CORDELIA** X5LICAT, X5LICRAT, HBR7LICAT, HBR7LICRAT; **CAPRI** CR1, CRR1; **DMF** DH6ICATQ, DH6ICRATQ; **ELCO** EL5ICA, EL5RICA; **LITHONIA** L5, L5R, EL7ICA, EL7RICA; **ELITE** B5, B5R, B5IC, B5RIC, B6IC, B6RIC; **JUNO** IC22, IC22R; **LITHONIA** L7X, L7XR; **NORA** NHIC-17QAT, NHRIC-17QAT; **PROGRESS** P187-TG, P87-AT, P184-TG, P84-AT; **SEA GULL** 11018, 11028; **THOMAS** PS1, PS1-RM.

**HALO LED HOUSINGS –** H550ICAT, H550RICAT H750ICAT, H750RICAT.

- Do not alter, relocate, or remove wiring, lampholders, power supply, or any other electrical component. Installation of the retrofit assembly requires a person familiar with the construction and operation of the luminaire's electrical system and the hazard involved. If not qualified, do not attempt installation. Contact a qualified electrician.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- 5-Year Warranty



## **INSTALLTION**

1. Make sure the **light switch** is off. [Fig. 1]
2. Adjust the **bracket** according to the **can** size. [Fig. 2]
3. Push the **switch** to the desired color temperature. [Fig. 2]
4. Thread the **socket adaptor** into the **socket**. [Fig. 3]

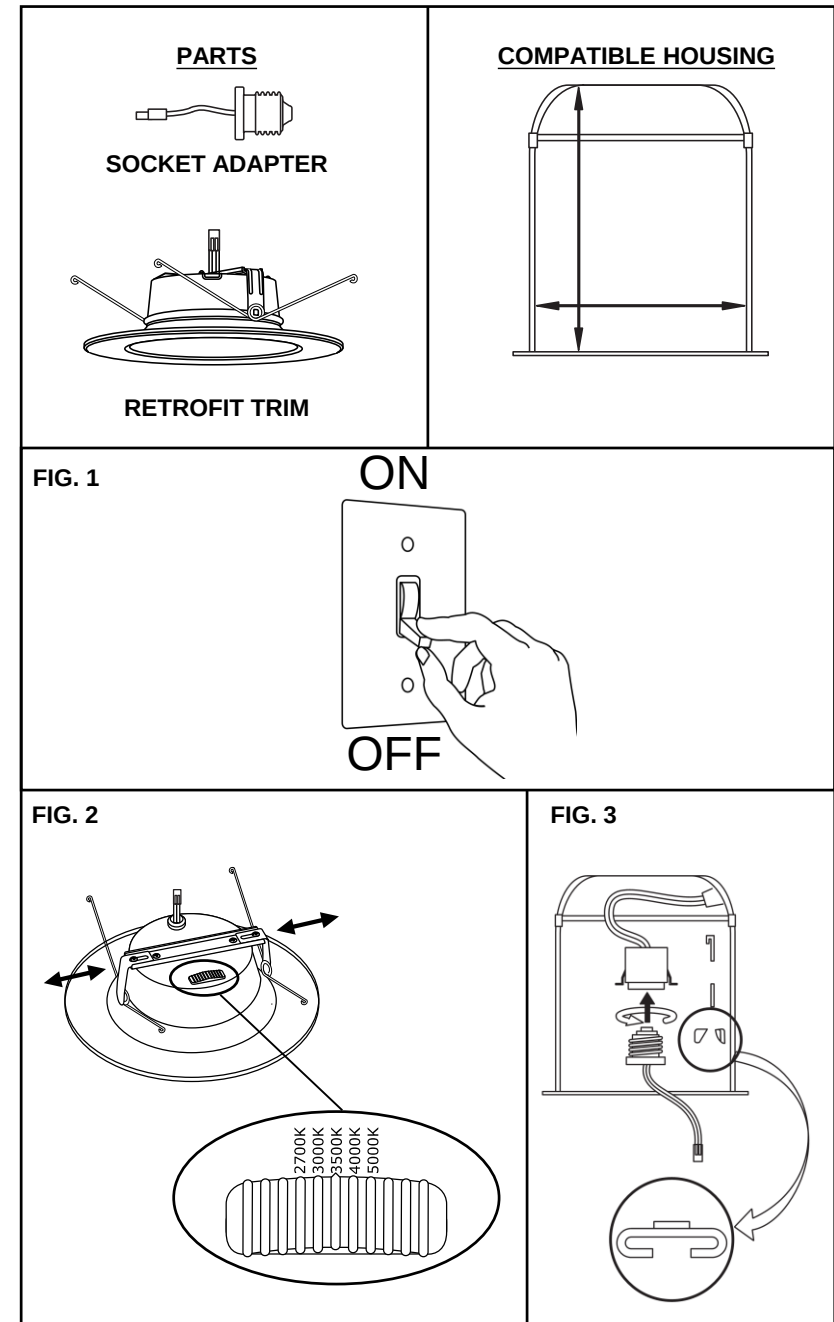


5. Plug the **male connector** of the **socket adapter** to the **female connector** of top of the **retrofit trim**. [Fig. 4]
6. Squeeze both **torsion spring** arms together and insert into the **torsion spring slots** (or **c-clips**) of the **can**. [Fig. 5]
7. Tuck all wires into the **can** and carefully push the **retrofit trim** into **can**. Make sure the fixture is securely flush against the ceiling surface.


## **LIGHT DISTRIBUTION MAPS**

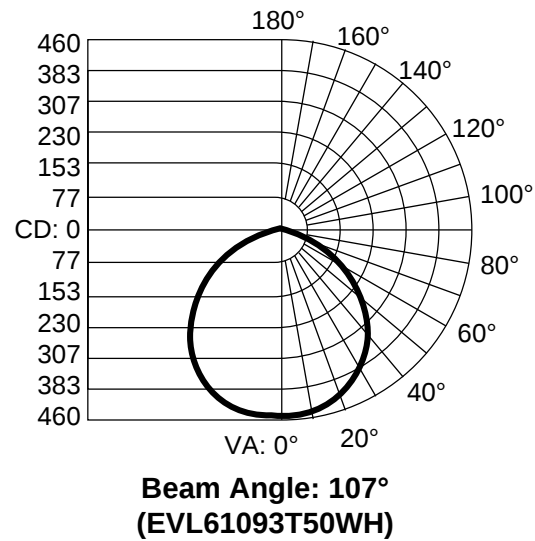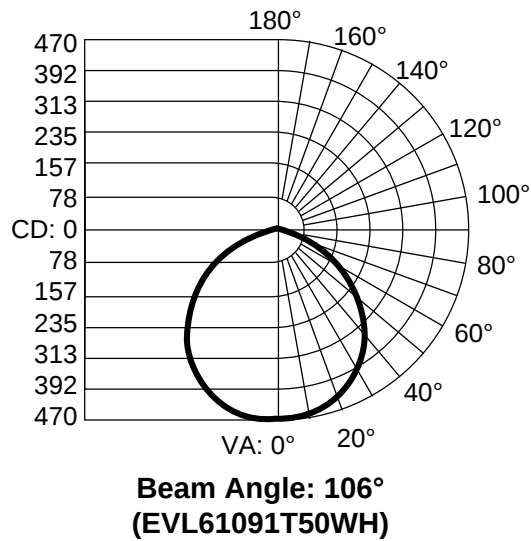

**FIG. 4**

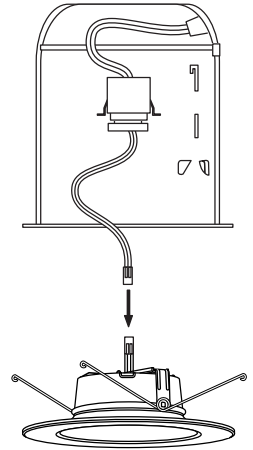

**FIG. 5**

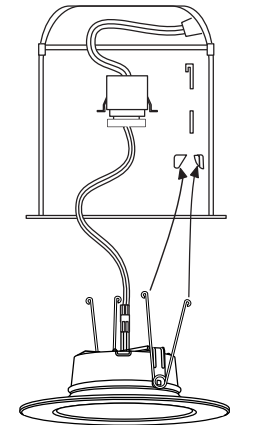

**ADVERTENCIA: RIESGO DE DESCARGA ELÉCTRICA. DESCONECTE EL SUMINISTRO ELÉCTRICO DE LA CAJA DE FUSIBLES O LOS INTERRUPTORES DE CIRCUITO ANTES DE INSTALAR O DAR MANTENIMIENTO A LA UNIDAD.**

**GENERAL:** Todas las conexiones eléctricas deben realizarse conforme a las normas locales y al Código Eléctrico Nacional (N.E.C. por sus siglas en inglés). Si no está familiarizado con las conexiones adecuadas de cableado eléctrico obtenga los servicios de un electricista calificado.

**PARA USO CON MODELOS DE CAJAS DE LUZ EMPOTRADAS MODELOS:**


**CAJAS INCANDESCENTES – COMMERCIAL ELECTRIC** HBR5ICAT, HBR5ICRAT, HBR5, HBR5R, HALO H5T, H5RT, H5ICT, H5RICAT, C7IC, C7ICR, C7ICA, C7ICRA, C7, C7R, C7S, HBR5000SIC; **HALO** H7ICT, H7RICT, H7ICAT, H7RICAT, H7T, H7RT, H27ICT, H27T, H27RT, H750ICAT, H750RICAT; **CORDELIA** X5LICAT, X5LICRAT, HBR7LICAT, HBR7LICRAT; **CAPRI** CR1, CRR1; **DMF** DH6ICATQ, DH6ICRATQ; **ELCO** EL5ICA, EL5RICA; **LITHONIA** L5, L5R, EL7ICA, EL7RICA; **ELITE** B5, B5R, B5IC, B5RIC, B6IC, B6RIC; **JUNO** IC22, IC22R; **LITHONIA** L7X, L7XR; **NORA** NHIC-17QAT, NHRIC-17QAT; **PROGRESS** P187-TG, P87-AT, P184-TG, P84-AT; **SEA GULL** 11018, 11028; **THOMAS** PS1, PS1-RM.

**CAJAS LED DE HALO – H550ICAT, H550RICAT H750ICAT, H750RICAT.**

- No altere, reubique, o elimine cableado, alimentación, o cualquier otro componente eléctrico. La instalación de la ase amble de reforzamiento requiere una persona familiarizada con la construcción y operación del sistema eléctrico de la luminaria y el riesgo involucrado.
- No haga ni alterar ningún agujero en la caja de cables o componentes eléctricos durante la instalación del kit.
- Para evitar daños de abrasión en el cableado, no exponga el cableado a los bordes de chapa u otros objetos filosos.
- Garantía de 5 años.



## INSTALACIÓN

1. Asegúrese de que el **interruptor de pared** de la luz esté apagado. [Fig. 1]
2. Ajuste el **soporte** de acuerdo con el tamaño de la **caja**. [Fig. 2]
3. Presione el **interruptor** a la temperatura de color deseada. [Fig. 2]
4. Enrosque el **adaptador del portalámparas** en el **enchufe**. [Fig. 3]

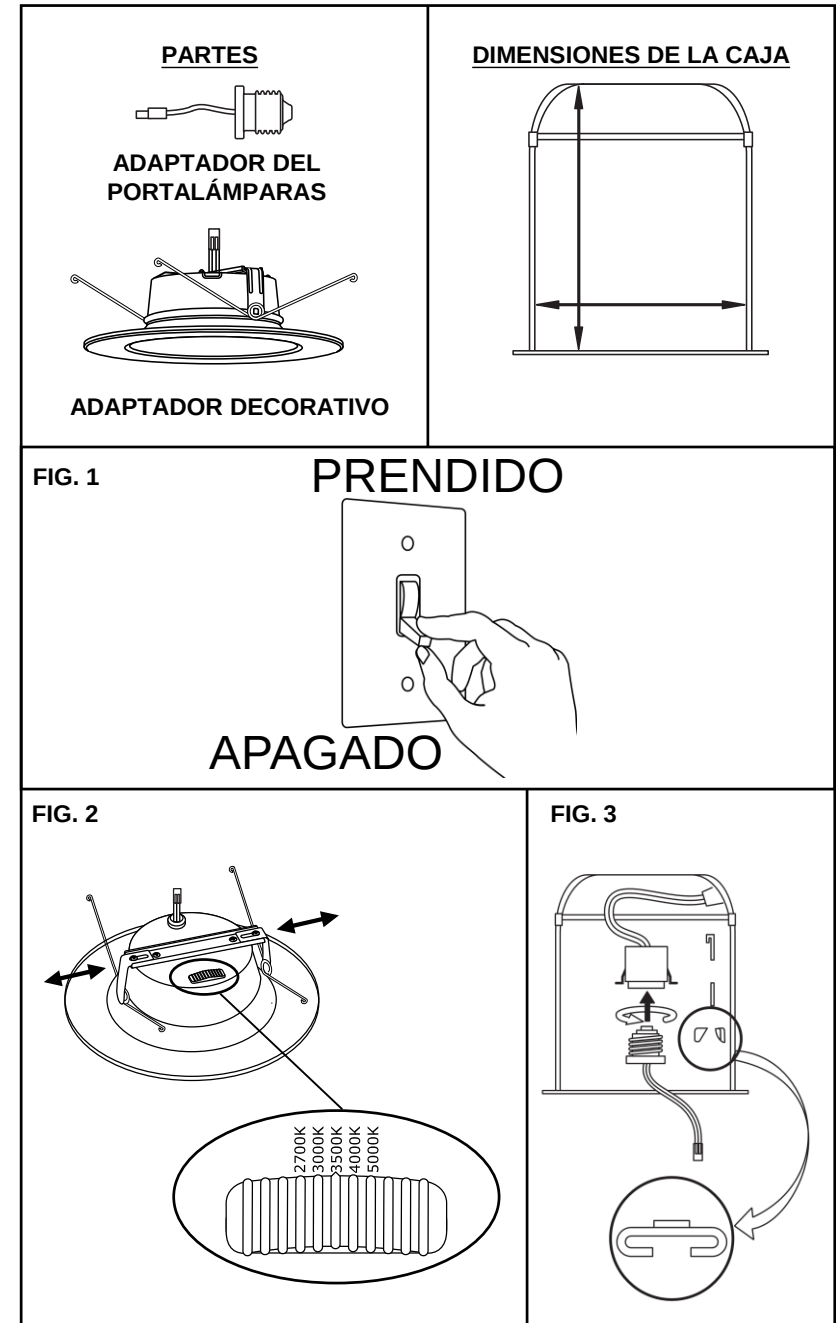


5. Enchufe el conector macho del **adaptador del portalámparas** al conector hembra de la parte superior del **adaptador decorativo**. [Fig. 4]
6. Apriete ambos **brazos del** resorte de torsión e insértelos en las **ranuras** (o **clips en C**) de la **caja**. [Fig. 5]
7. Meta todos los cables dentro de la **caja** y empuje con cuidado la moldura de **adaptador decorativo** dentro de la **caja**. Asegúrese de que la lámpara esté bien nivelada contra la superficie del techo.


## MAPAS DE DISTRIBUCIÓN DE LUZ

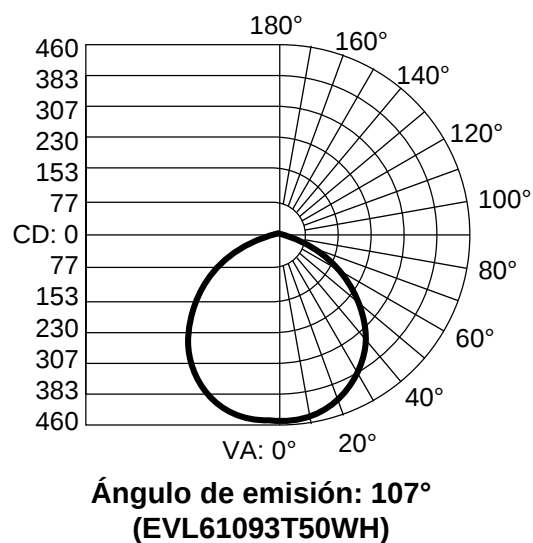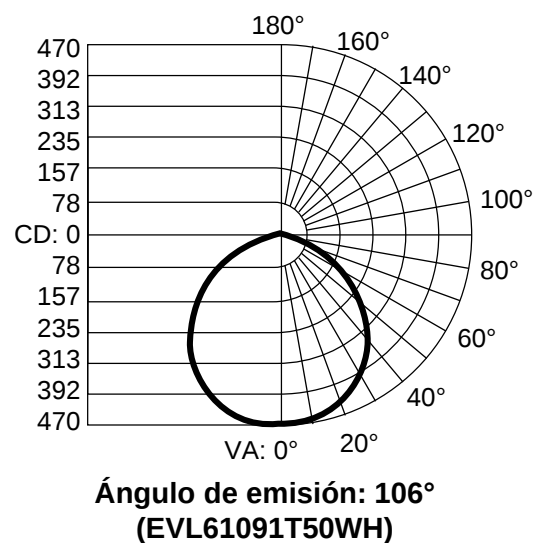

**FIG. 4**

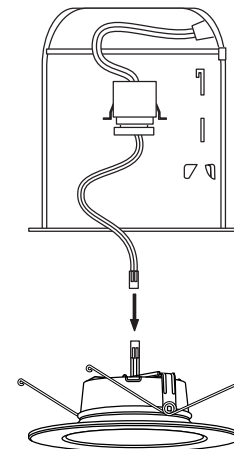

**FIG. 5**

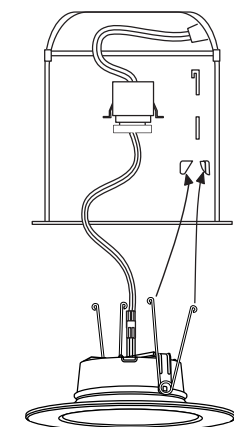

## FCC NOTICE



**WARNING:** Changes or modification to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**FCC responsible party:** Cordelia Lighting  
**Company name:** Cordelia Lighting  
**Address:** 20101 S Santa Fe Avenue  
East Rancho Dominguez, CA 90221  
**Phone:** (800) 345-0542

NOTICE: This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 14 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference can be determined by turning the equipment off and on, the user is encouraged to try to correct the interface by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## WARRANTY

**Envirolite®** warrants this product to be free from defects in material and workmanship for five years from the original date of purchase by the consumer. This warranty is limited to the counter replacement at the time of purchase, with the original purchase receipt. **Envirolite®** will not be liable for the loss or damage of any kind, incidental or consequential damages of any kind, whether based on warranty contract or negligence, and arising in connection with the sale, use or repair of the product claimed to be defective. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation may not apply to you. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state. Misuse, accident, improper installation or maintenance will also void the warranty.

## AVISO DE LA FCC



**ADVERTENCIA:** Cambios o modificaciones a esta unidad no aprobados expresamente por la parte responsable del cumplimiento podrían anular la autoridad del usuario para operar el equipo.

**Partido responsable de la FCC:** Cordelia Lighting  
**Nombre de la empresa:** Cordelia Lighting  
**Dirección:** 20101 S Santa Fe Avenue  
East Rancho Dominguez, CA 90221  
**Teléfono:** (800) 345-0542

NOTA: Este aparato ha sido probado y cumple con los límites para un aparato digital de Clase B, según la Parte 14 de la normativa FCC. Estos límites están diseñados para proporcionar una protección razonable contra las interferencias perjudiciales en una instalación residencial. Este aparato genera, utiliza y puede irradiar energía de radiofrecuencia y, si no se instala y utiliza de acuerdo con las instrucciones, puede causar interferencias perjudiciales en las comunicaciones de radio. Sin embargo, no hay garantía de que la interferencia puede determinarse encendiéndolo y apagándolo, se recomienda al usuario que intente corregir la interfaz en una o más de las siguientes medidas:

- Reorientar o reubicar la antena de recepción.
- Aumentar la distancia entre el aparato y el receptor.
- Conectar el equipo a un enchufe de un circuito diferente de aquel al que está conectado el receptor.
- Consulte al distribuidor o un técnico de radio/televisión para obtener ayuda.

## GARANTÍA

**Envirolite®** garantiza este producto contra defectos en sus materiales y mano de obra por un plazo de cinco años a partir de la fecha de compra. Esta garantía está limitada al cambio del producto en el mostrador al momento de la compra, con la presentación del recibo de compra original. **Envirolite®** no se responsabiliza por ningún tipo de pérdida o daño así como tampoco por daños incidentales o indirectos, ya sea que se basen en el contrato de garantía o en negligencia y que resulten de la venta, uso o reparación del producto que se reclama como defectuoso. Algunos estados no permiten la exclusión o limitación de daños incidentales o indirectos por lo cual la limitación anterior podría no aplicar a su caso. Esta garantía le otorga derechos legales específicos y usted podría tener otros derechos que varían según el estado. El uso indebido, accidente, instalación o mantenimiento incorrectos invalidarán también la garantía.