


8"-15" Widespread Faucet

- LF-049-SLCC Finish(CC) ☐
- LF-049-SLKK Finish(KK) ☐
- LF-049-SLYY Finish(Y) ☐

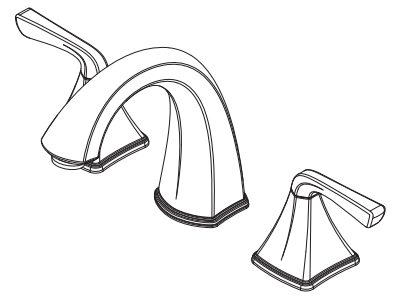

Specifications

Features

- 1.2 GPM Flow Rate
- Quick Connect Installation
- Fixed Hubs
- Metal Lever Handles
- 3-Hole Installation
- High Arc Spout
- Quick Install Tool
- Color Coded Connectors (YY Only)
- 8-20" Adjustable Install (YY Only)
- Push & Seal™ Pop-Up
- Pforever Seal
- Ceramic Disc Valves
- Pforever Warranty®



Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min
- Cal Green Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)




Dimensions

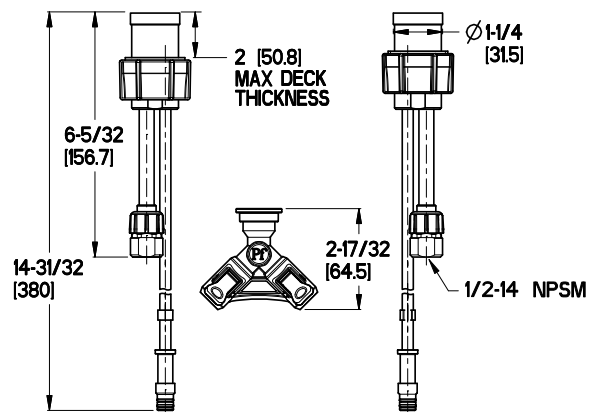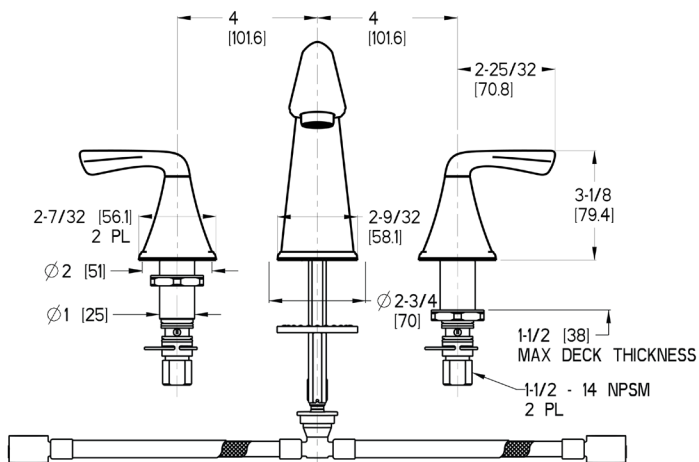

Underbody for YY Finish Only

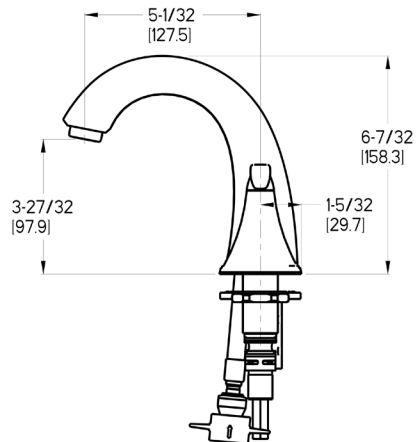

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

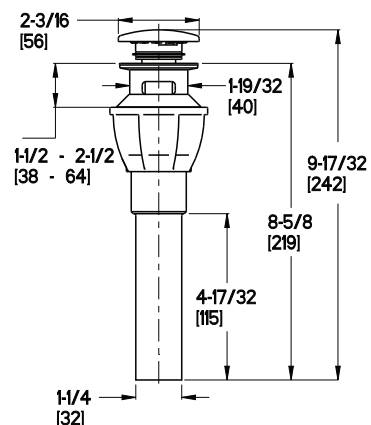

Push & Seal™