


LG529-MCC Finish(C)

LG529-MCS Finish(S)

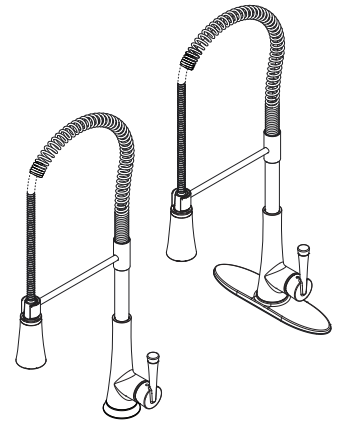

Specifications

Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Sprayer (Stream, Spray, and Pause)
- Mounting Hardware Included
- Quick Install Tool
- Pfaster Connect™
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- CEC Compliant
- Cal Green Compliant
- NSF 61/9 Annex G (Low lead)
- ADA Compliant-ANSI A117.1
- ASME A112.18.3 (Backflow Prevention)



Dimensions

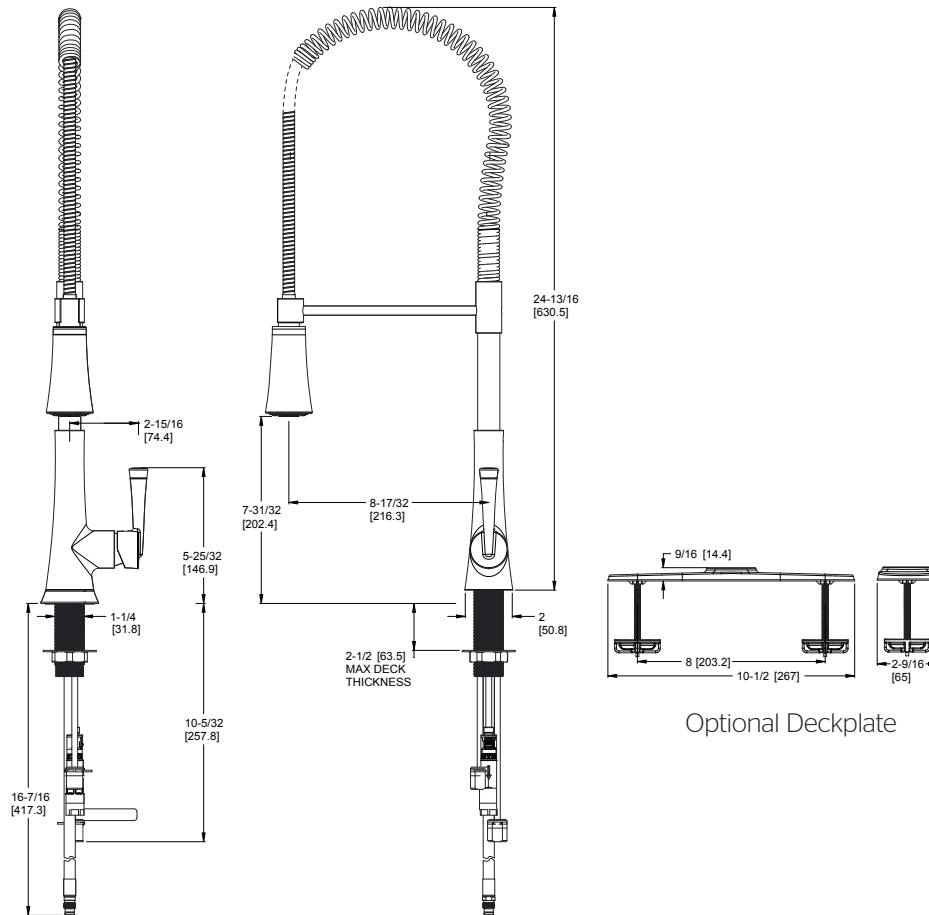

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings