


Features

- Vitreous china
- Includes K-4686 toilet seat with scalloped handhold locations for children
- Available with white, primary yellow, primary red, or primary blue colored seats
- 10" (254 mm) rough-in
- 1-1/2" top spud
- 1.6 gpf (6 lpf)
- 12-3/8" (314 mm) x 10-1/8" (257 mm) water area
- 26-7/8" (683 mm) x 12-7/8" (327 mm) x 12" (305 mm)

BOWL
K-4321

ADA

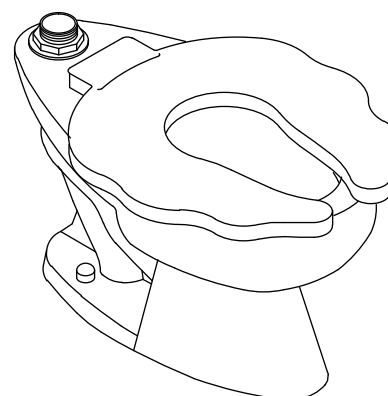

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA-Children's Environment
- ASME A112.19.2/CSA B45.1
- ICC/ANSI A117.1

Colors/Finishes

- O: White toilet with white seat and hinges
- R: White toilet with red seat and green hinges
- B: White toilet with blue seat and green hinges
- Y: White toilet with yellow seat and green hinges

Accessories

- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes			
K-4321	Elongated bowl toilet	<input type="checkbox"/> O	<input type="checkbox"/> R	<input type="checkbox"/> B	<input type="checkbox"/> Y
Recommended Accessories					
K-10674	WAVE exposed toilet flushometer – 1.6 gpf (6 lpf)				
K-10957	Touchless DC toilet flushometer – 1.6 gpf (6 lpf)				
K-13516	Manual toilet flushometer – 1.6 gpf (6 lpf)				

Product Specification

The elongated bowl shall be 10" (254 mm) rough-in with a 1-1/2" top spud. Bowl shall be made of vitreous china. Bowl shall have 12-3/8" (314 mm) by 10-1/8" (257 mm) water area. Bowl shall be 1.6 gpf (6 lpf). Bowl shall include K-4686 toilet seat with scalloped handhold locations for children. Bowl shall have a choice of white, primary yellow, primary red or primary blue colored seat. Bowl shall be 26-7/8" (683 mm) in length, 12-7/8" (327 mm) in width, and 12" (305 mm) in height. Bowl shall be Kohler Model K-4321-_____.

Technical Information

Fixture:	
Configuration	Top spud, elongated
Water per flush	1.6 gal (6 L)*
Spud size	1-1/2"
Passageway	2-1/8" (54 mm)
Water area	12-3/8" (314 mm) x 10-1/8" (257 mm)
Water depth from rim	4-1/4" (108 mm)
Seat post hole centers	5-1/2" (140 mm)
Minimum static pressure required	35 psi (241.3 kPa)
Maximum static pressure	80 psi (551.6 kPa)
Minimum flowing pressure required	25 psi (172.4 kPa)
Required supply minimum	25 gpm (94.6 lpm)
* Designed to flush with 1.6 gal (6 L) of water when installed with a 1.6 gpf (6 lpf) valve.	

Included components:


Spud	18357
Seat	K-4686-A
Bolt cap accessory pack	1013092

Installation Notes

Install this product according to the installation guide.

Refer to manufacturer and local codes for flush valve requirements.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

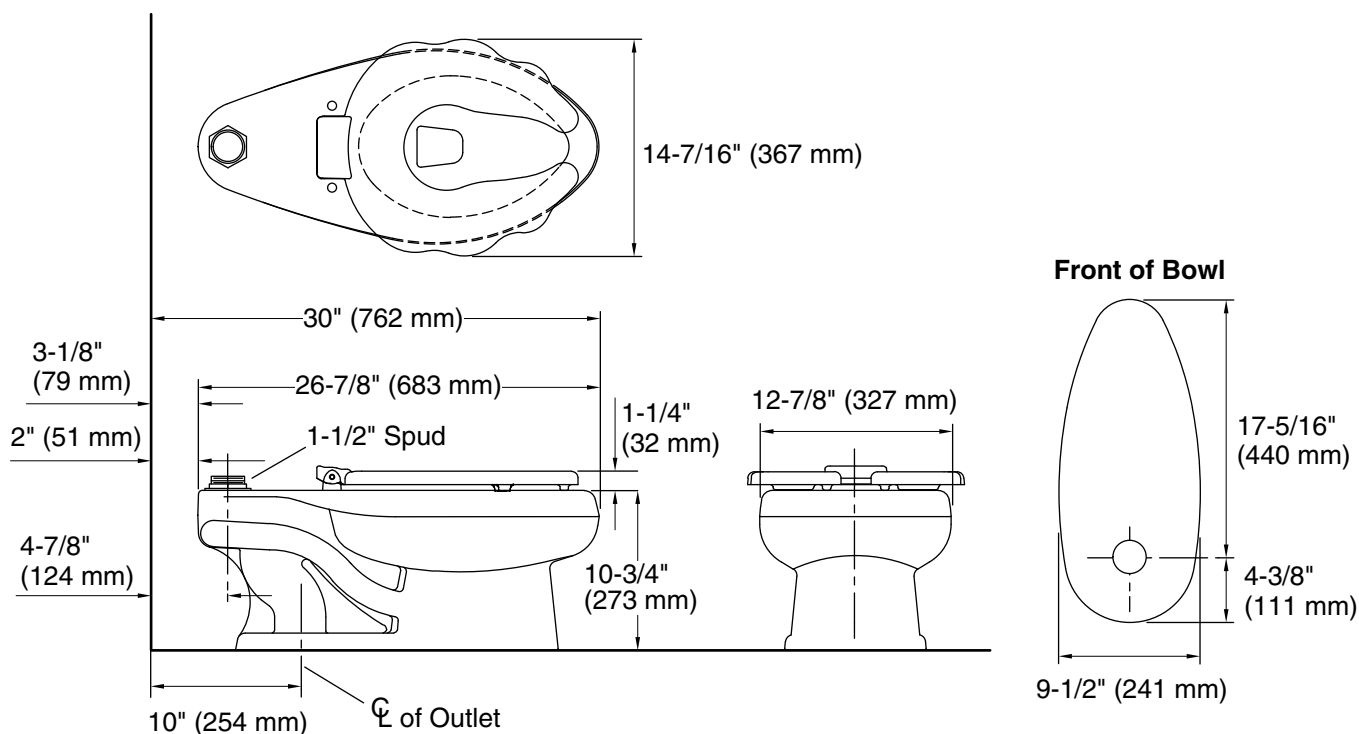

Product Diagram