

Origin21[®]

ORIGIN 21 and logo design are trademarks or registered trademarks of LF, LLC. All rights reserved.


ITEM #6021332

MODEL #43526

PENDANT

Español p. 10

ATTACH YOUR RECEIPT HERE

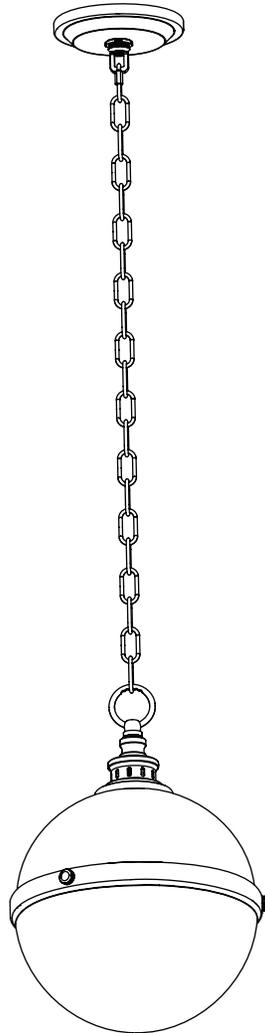

Purchase Date _____


Thank you for purchasing this ORIGIN 21 product.
Questions, problems, missing parts?
Before returning, to your retailer, contact us at:
888-251-1026, 8 a.m. - 8 p.m., EST, Monday - Sunday or ascs@lowes.com.

SS24104

TABLE OF CONTENTS

Package Contents.	3
Hardware Contents.	3
Preparation	3
Safety Information.	4
Assembly Instructions.	5
Troubleshooting.	9
3-Year Limited Warranty.	9

PACKAGE CONTENTS

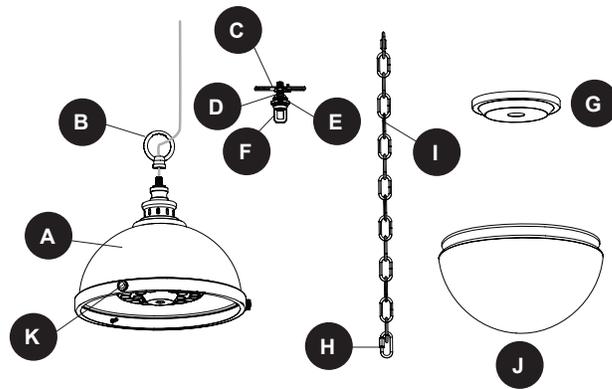

PART	DESCRIPTION	QUANTITY
A	Fixture	1
B	Decorative Ring	1
C	Mounting Bracket	1
D	Threaded Rod (preassembled to Mounting Bracket [C])	1
E	Decorative Nut (preassembled to Chain Loop [F])	1
F	Chain Loop (preassembled to Threaded Rod [D])	1
G	Ceiling Plate	1
H	Open Link (preassembled to Chain [I])	2
I	Chain	1
J	Glass Shade	1
K	Thumbscrew (preassembled to Fixture [A])	3

HARDWARE CONTENTS

AA



Wire Connector
Qty. 3

RR




Bracket Screw
Qty. 2


PREPARATION

Estimated Assembly Time: 60 minutes

Tools Required for Assembly (not included):

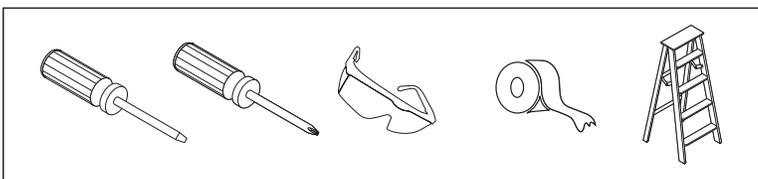

Helpful Tools (not included)



SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product. Failure to do so could lead to electrical shock, fire or other injuries that could be hazardous or even fatal.

- Before you begin installing the light, disconnect the power by removing fuses or turning off the circuit breakers.
- The net weight of the light kit is 5.9 lbs.
- This fixture is intended for indoor locations. It is not suitable for outdoor or damp locations.

DANGER:

- DO NOT connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. Installing a fixture into an electrical system not having a proper grounding means could cause metal parts of the fixture to carry electrical currents if any of the fixture wires, wire connections or splices were to become broken, cut or loose during the mounting or normal operation of the fixture. Under this condition, anyone coming in contact with the fixture would be subject to electrical shock, which could cause serious injury or death.
- DO NOT connect the bare or green insulation fixture ground wire to the black (hot) current-carrying wire or the white neutral house wire. Connection of the bare or green fixture ground wire to the black or white house wires may cause metal parts of the fixture to carry electrical currents. Under this condition anyone coming in contact with the fixture will receive electrical shock, which could cause serious injury or death.
- DO NOT damage or cut the wire insulation (covering) during installation of the fixture. DO NOT permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electrical shock.

WARNING:


- All electrical connections must be in agreement with local codes and ordinances, the National Electric Code (NEC) and ANSI/NFPA 70-1999. Contact your municipal building department to learn about your local codes, permits and/or inspections. Risk of fire - most dwellings built before 1985 have supply wire rated for 140°F. Consult a qualified electrician before installation.
- To avoid personal injury, the use of gloves may be necessary while handling fixture parts with sharp edges.
- DO NOT suspend any fixture by the house wires. A fixture must always be mounted directly to a an outlet box. Wire connectors will not support the weight of a fixture. Suspending a fixture by the house wires and wire connectors will result in the fixture falling, with the possibility of personal injury and the danger of electrical shock or fire.
- To reduce the risk of fire, electrical shock, or personal injury, each wire connector used with this light kit should accept only one 18-gauge wire from the light fixture and one 18-gauge wire from the outlet box. If there are three or more wires to connect or any of the wires is larger than 18 gauges, consult an electrician for the proper size wire connectors to use.
- This device complies with part 15 of FCC Rules. Operation is subject to the following two conditions: 1) This device may cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:--Reorient or relocate the receiving antenna. --Increase the separation between the equipment and receiver. --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. --Consult the dealer or an experienced radio/TV technician for help.

HKC-US, 3350 Players Club Pkwy. #225, Memphis, TN 38125, 1-8888-251-1026


ASSEMBLY INSTRUCTIONS

1. Turn off the circuit breakers and the wall switch to the supply line leads.


⚠ DANGER: Failure to disconnect the power supply prior to installation may result in serious injury or death.

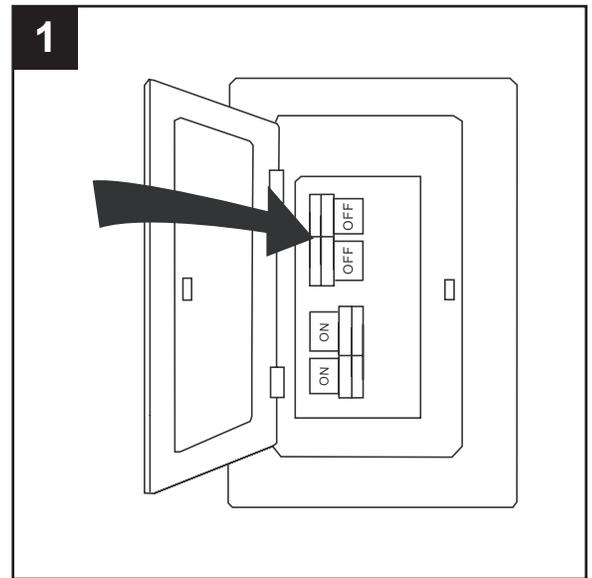

2. If desired, use pliers (sold separately) to open and remove links from chain (I) to shorten the chain (I) to desired length.

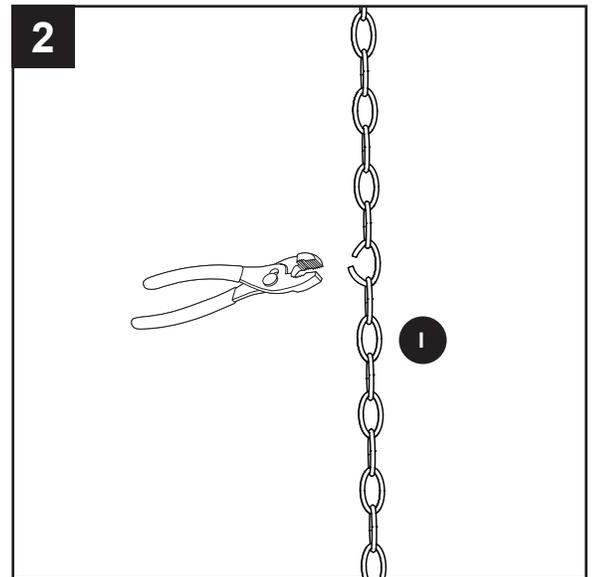


3. Slide decorative ring (B) down and twist in a clockwise direction to secure to fixture (A).

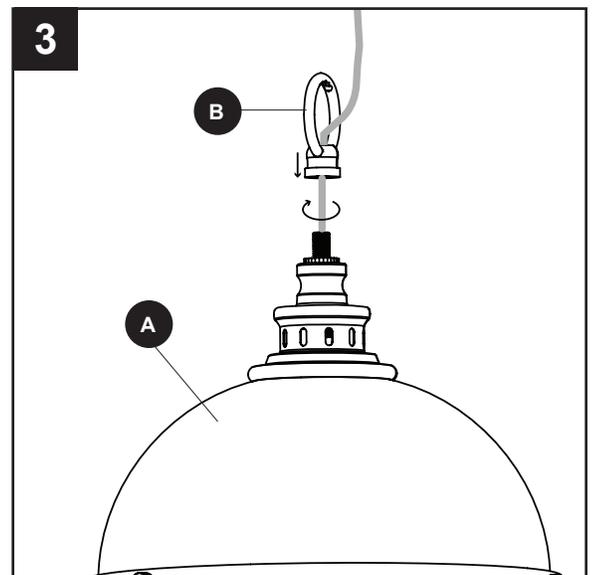


ASSEMBLY INSTRUCTIONS

4. Unscrew the nut on open link (H), connect the chain (I) to the decorative ring (B), then close the open link (H). Weave the wires from the fixture (A) through the loops of the chain (I).

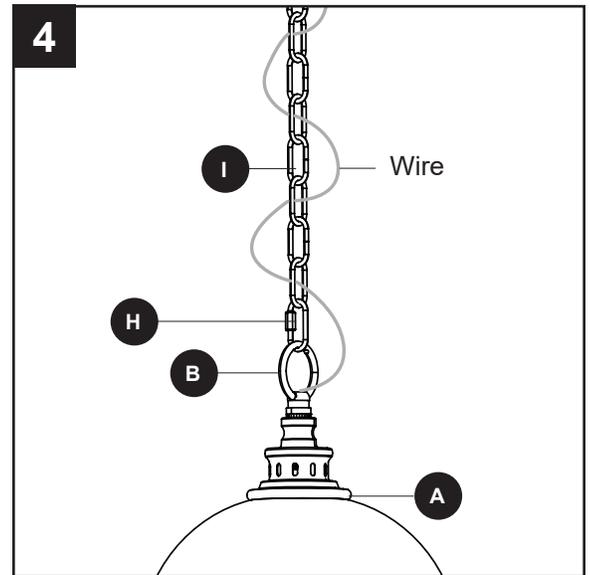


5. Feed the chain (I) and wire through the decorative nut (E) and the ceiling plate (G) and mounting bracket (C). Then use an open link (H) to connect the chain (I) to the chain loop (F) preassembled to the mounting bracket (C).

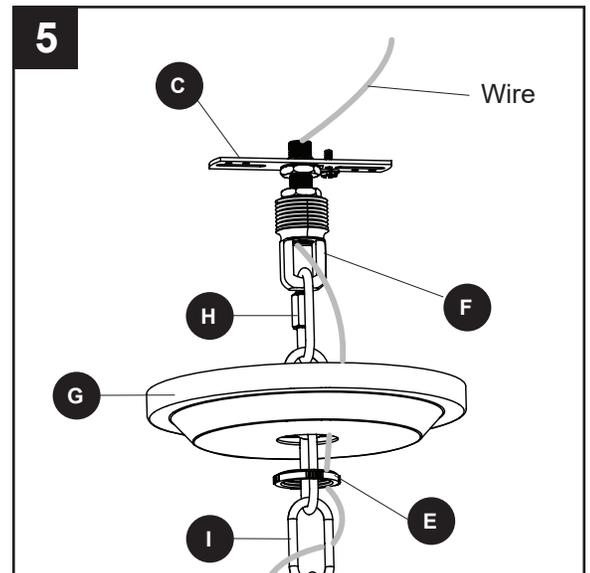

6. Use the bracket screws (RR) to attach the mounting bracket (C) securely to the outlet box (sold separately).


Hardware Used

RR Bracket Screw  x 2

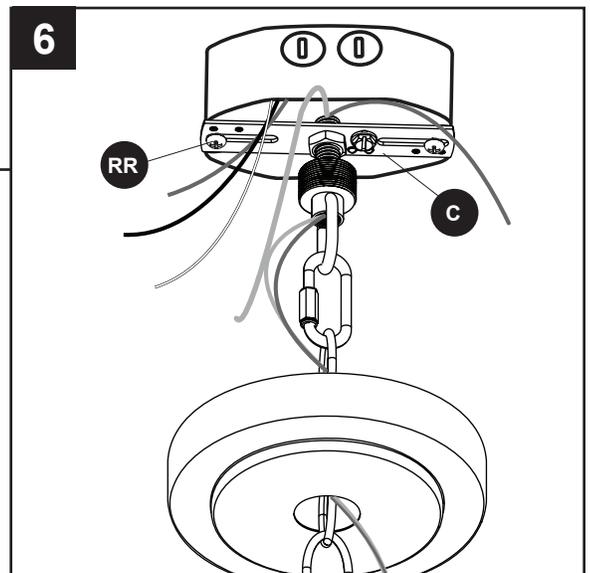


ASSEMBLY INSTRUCTIONS

7. Loosen the ground screw on the mounting bracket (C) and wrap the bare wire from the fixture around the ground screw. Tighten the ground screw to hold the bare wire in place. **Note:** Ensure there is enough of the bare wire extending from the ground screw to connect to the ground wire from the outlet box using a wire connector.

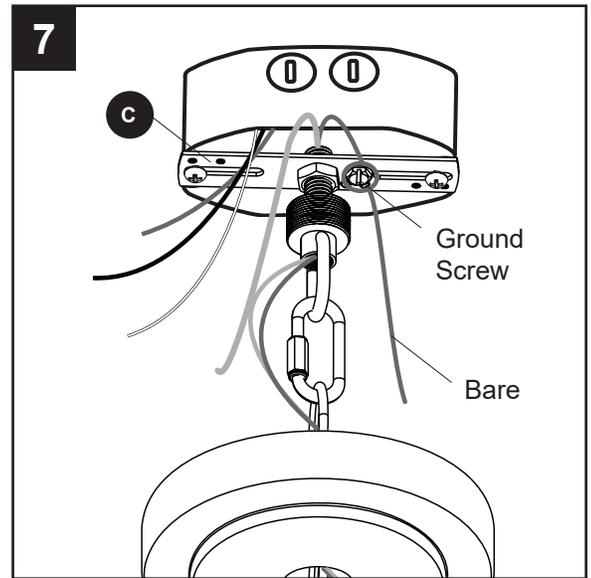

8. Depending on the length of chain (I) you use, you may need to cut the lead wires back to simplify the wiring. Take the lead wires and make sure that you have pulled them all the way through the top of the mounting bracket (C) and measure 8 in. of lead wire, and then cut the excess wire off with wire cutters (not included).


Note: If you decide to shorten the lead wires, and the labels are removed in the process, be sure to re-label the wires before you proceed.

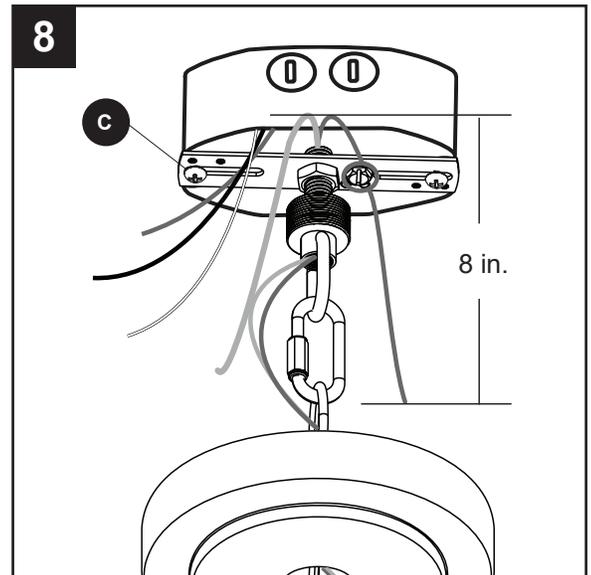

9. Connect supply and fixture wires according to the diagram and these steps:

- Connect the ground wire (⊕) from the fixture to the Bare/Green (ground) supply wire.
- Connect the neutral wire (N) from the fixture to the White (neutral) supply wire.
- Connect the live wire (L) from the fixture to the Black (hot) supply wire.

Secure all wiring connections together with wire connectors (AA).

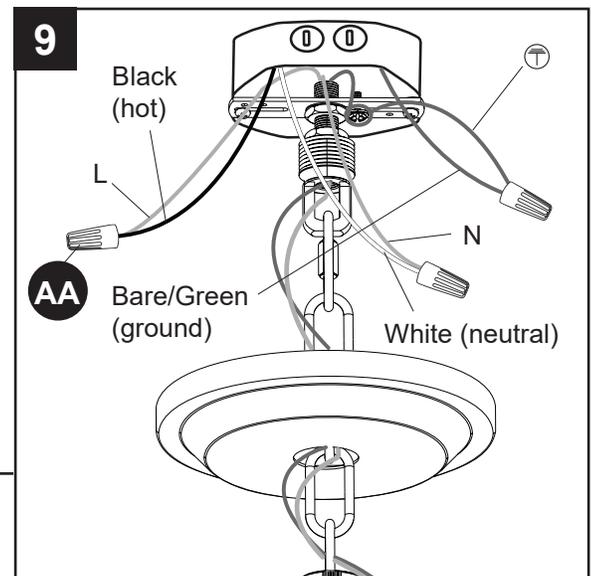

Hardware Used

AA Wire Connector




x 3

ASSEMBLY INSTRUCTIONS

10. Wrap electrical tape (not included) around each individual wire connector (AA) down to the wire.


Turn the spliced/taped wires upward and gently push the wires and wire connectors (AA) into the outlet box.

WARNING: Ensure no bare wire strands are visible after making connections. Place the ground and neutral supply wire connections on opposite sides of outlet box from the hot wire connection.

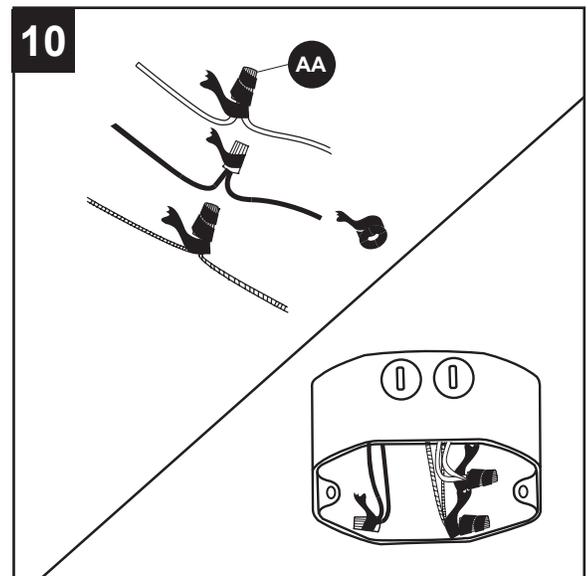

11. Lift the ceiling plate (G) flush with the ceiling. Use the decorative nut (E) to secure the ceiling plate.


Note: The chain loop (F) was positioned on the threaded rod (D) at the factory. If your ceiling plate (G) doesn't sit flush with the ceiling, see Troubleshooting, page 9.

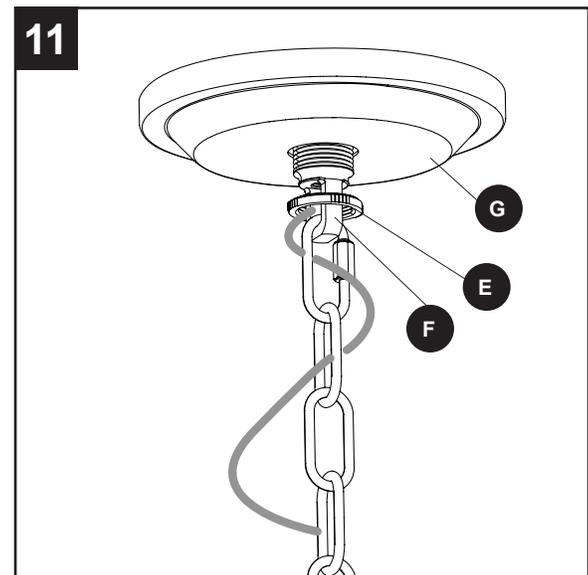

12. Loosen the thumbscrews (K) on the fixture (A). Lift glass shade (J) into fixture (A) and tighten loosened thumbscrews (K) to secure.

Restore the power to the circuit breakers and the wall switch to the supply line leads.

Assembly is complete.

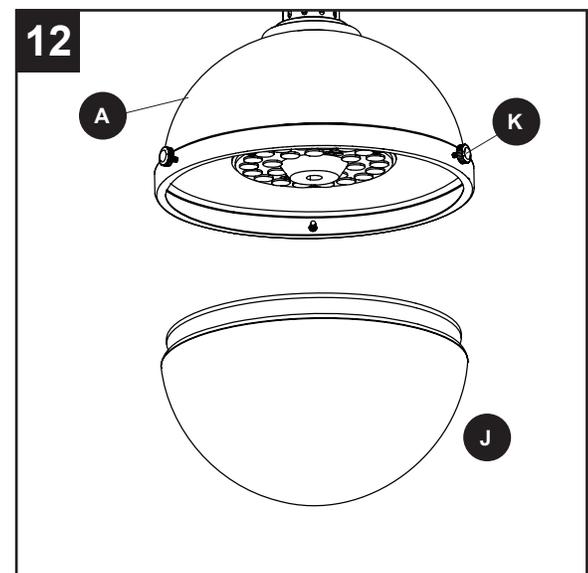

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Ceiling Plate (G) does not sit flush with ceiling.	Edge of outlet box may not be flush with ceiling.	Remove the chain loop (F) from threaded rod (D) and adjust the hex nuts on the lower part of threaded rod. Reinstall the chain loop (F).

THREE-YEAR LIMITED WARRANTY

The manufacturer warrants all of its lighting fixtures against defects in materials and workmanship for three (3) years from the date of purchase. If within this period the product is found to be defective, take a copy of the bill of sale as a proof of purchase and the product in its original carton to the place of purchase. The manufacturer will, at its option, repair, replace or refund the purchase price to the consumer. All costs of installation and removal of the fixture is the responsibility of the consumer. This warranty does not cover fixtures becoming defective due to misuse, accidental damage or improper handling and/or installation and specifically excludes liability for direct, incidental or consequential damages. As some states do not allow exclusions of limitations on an implied warranty, the above exclusion and limitation may not apply. This warranty gives you specific rights and you may also have other rights which may vary from state to state.