

INSTALLATION INSTRUCTIONS

For Model # 71252-L/71253-L

READ AND SAVE THESE INSTRUCTIONS *Fixture 125/8" W x 9 3/4" H x 15 1/8"*

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

LED


T/O 5" B/O. 4 3/4"

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. Unscrew the cap nuts (G) and separate the mounting plate (C) (Part # A-020-102) from back plate (H).
4. Adjust the two mounting screws (B) on mounting plate (C) spaced the same distance apart as the holes on back plate (H). Secure mounting screws (B) into mounting plate (C) with the hex nuts (I) provided. Note: The length of mounting screws (B) into mounting plate (C) may be adjusted if necessary.
5. Attach the mounting plate (C) to the outlet box (not provided) with the two outlet box screws (D) (Size: 8-32*1").
Note: the side of mounting plate marked "GND" must face out.

Fig.1

Mounting plate (1) (Part# A-020-102)
Ground screw (1)
Mounting screws (2)

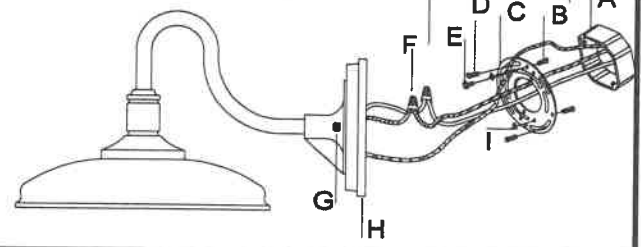

CONNECTION THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in (Fig.2), making sure that all wire connectors (F) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate using the green screw provided.

FINISHING THE INSTALLATION (Fig.1)

7. Align back plate (H) onto mounting screws (B) and secure with the cap nuts (G).
8. To prevent moisture from entering the outlet box and causing shortage, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back-plate where it meets the wall leaving space at bottom to allow moisture a means to escape. (Fig.3)
9. Bulb information: (1 x AC LED 11W included for 71252-L and 1 x AC LED 14W included for 71253-L.)

DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.2


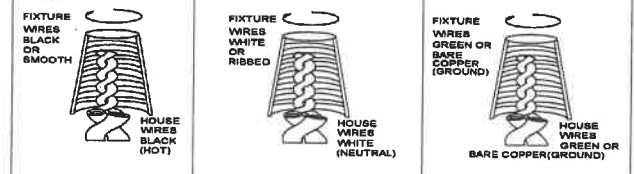


Fig. 3

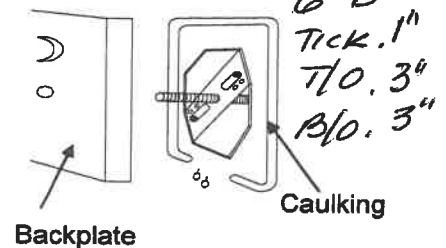


Replacing LED module (Fig. 4)

The LED module can be replaced by a qualified electrician and shut off the power at the circuit breaker and remove fixture from the outlet box without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 4.)

- a. Shut off power.
- b. Loosening screws (R) and remove metal panel (Q).
- c. Unscrew screws (P), unscrew wire connectors (J) and take off electrical tape (K) to remove LED cover (O), LED glass (N) and LED module (M) for LED module re-lamping. Note: The LED module should be provided by a specified supplier.
- d. For better heat dissipation, the LED module (M) should be installed with the heat transfer silicone (L) when re-lamping.

Fig.4

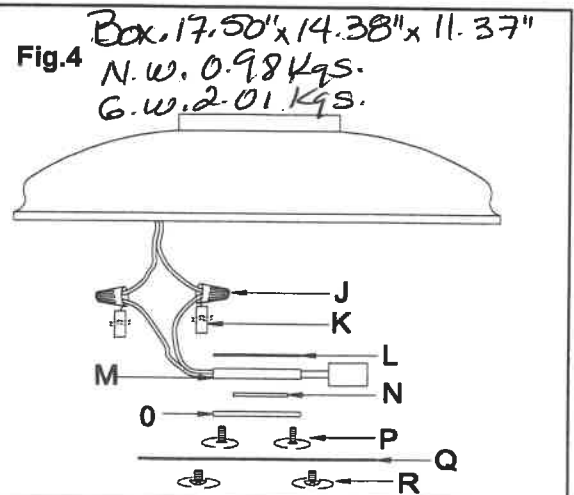

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.



INSTALLATION INSTRUCTIONS

For Model # 71252-L/71253-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. Unscrew the cap nuts (G) and separate the mounting plate (C) (Part # A-020-102) from back plate (H).
4. Adjust the two mounting screws (B) on mounting plate (C) spaced the same distance apart as the holes on back plate (H). Secure mounting screws (B) into mounting plate (C) with the hex nuts (I) provided. Note: The length of mounting screws (B) into mounting plate (C) may be adjusted if necessary.
5. Attach the mounting plate (C) to the outlet box (not provided) with the two outlet box screws (D) (Size: 8-32*1").

Note: the side of mounting plate marked "GND" must face out.

CONNECTION THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in (Fig.2), making sure that all wire connectors (F) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate using the green screw provided.

FINISHING THE INSTALLATION (Fig.1)

7. Align back plate (H) onto mounting screws (B) and secure with the cap nuts (G).
8. To prevent moisture from entering the outlet box and causing shortage, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back-plate where it meets the wall leaving space at bottom to allow moisture a means to escape. (Fig.3)
9. Bulb information: (1 x AC LED 11W included for 71252-L and 1 x AC LED 14W included for 71253-L.)





DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. Return power to the junction box and test the fixture.

Replacing LED module (Fig. 4)

The LED module can be replaced by a qualified electrician and shut off the power at the circuit breaker and remove fixture from the outlet box without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 4.)

- a. Shut off power.
- b. Loosening screws (R) and remove metal panel (Q).
- c. Unscrew screws (P), unscrew wire connectors (J) and take off electrical tape (K) to remove LED cover (O), LED glass (N) and LED module (M) for LED module re-lamping. Note: The LED module should be provided by a specified supplier.
- d. For better heat dissipation, the LED module (M) should be installed with the heat transfer silicone (L) when re-lamping.

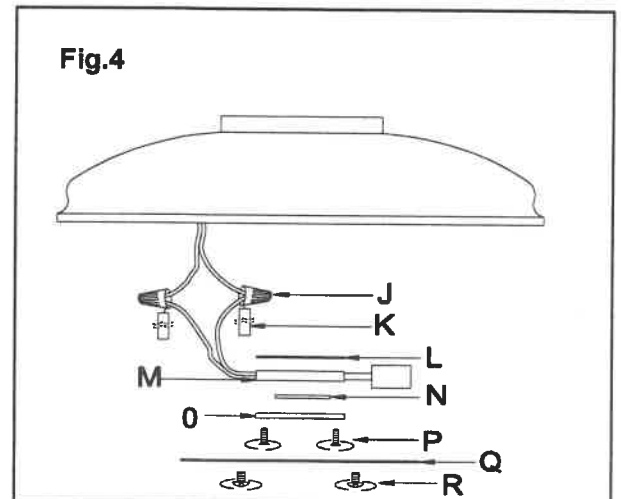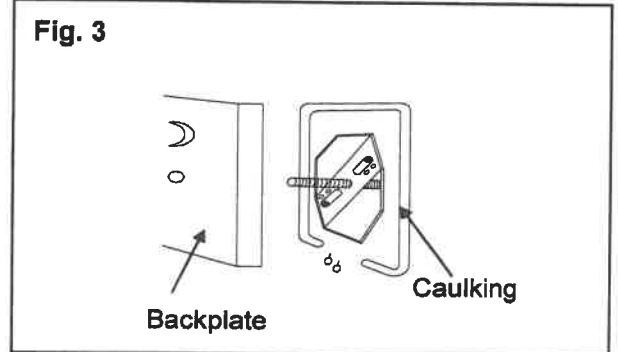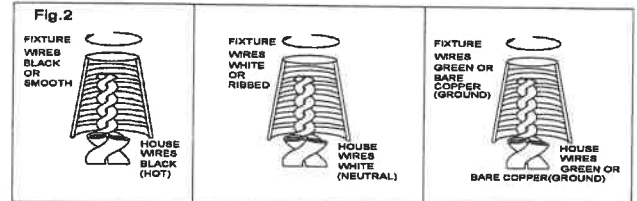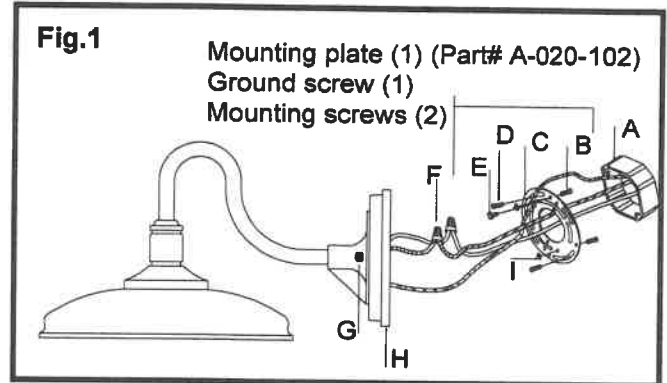

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

