


REVISIONS

REV.	DATE	DESCRIPTION	BY
-	07-22-26	INITIAL RELEASE	RMV

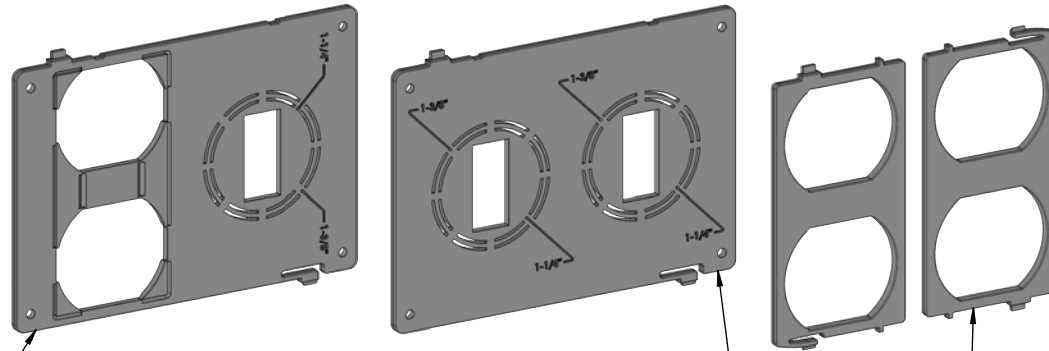


Adapter, 2-Gang, Switch / Round, Receptacle, 12-IN-1, GFCI Base

Adapter, 2-Gang, Switch / Round, Switch / Round, 9-IN-1, GFCI Base

Adapter, Duplex Insert, Plastic, 1-Gang


GASKET

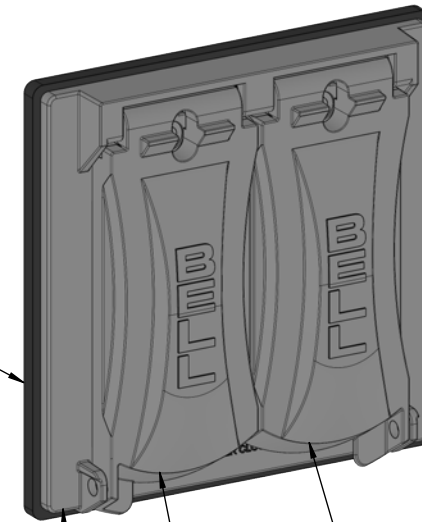

COVER

COVER

Base, Flat, Metal, 2-Gang, Double Flip, GFCI Style

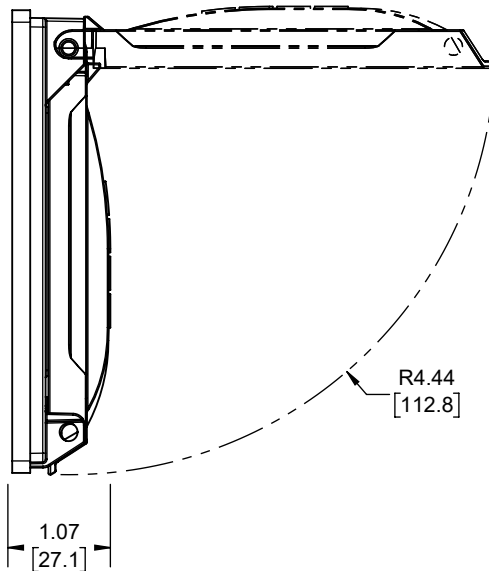


R4.44
[112.8]

4.84
[122.9]

4.79
[121.7]

1.81
[46]

1.07
[27.1]

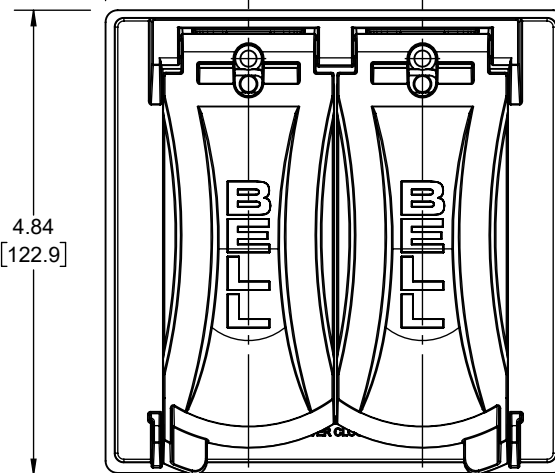

DESCRIPTION	MATERIAL	FINISH
GASKET	PE FOAM	GRAY/BLACK
ADAPTERS	PC	GRAY
COVER	DC ALUM	GRAY
BASE	DC ALUM	GRAY

LIST OF PARTS

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE:

Flat Enclosure, Metal, 2-Gang,
Double Flip, GFCI Style

TOLERANCE UNLESS
OTHERWISE SPECIFIED

.XX DECIMAL ± .015
.XXX DECIMAL ± .005
ANGLE ± 2°



DRAWN BY:	RMV	SCALE:	SIZE:
APP. BY:	N.S.		
DATE:	07-22-26	1:2	A

NOTES:

1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
3. cULus LISTED
4. FOR INSTRUCTION SHEET(S), SCROLL DOWN TO NEXT SHEET(S)


CONFIGURING THE BASE • CONFIGURACIÓN DE LA BASE

Already GFCI
Viene GFCI

Configure for Duplex
Configure para Doble

Configure for Adapter
Configure para el Adaptador


1



Comes pre-configured for GFCI.

Viene pre-configurado para GFCI.


1



Slide in duplex adapter to the back of the base.

Deslice el adaptador dúplex a la espalda de la base.


2



Configured for duplex.

Configurado para doble.


1



Use lineman's or needle nose pliers to configure adapter.

Utilice pinzas de punta fina para configurar el adaptador.

2




Snap adapter to the back of base.

Precione el adaptador en la parte posterior de la base.

IMPORTANT: Turn off power to outlet.
IMPORTANTE: Desconecte el suministro eléctrico hacia el receptáculo.

DIAGRAM: GFCI/Duplex Installation
DIAGRAMA: Instalación de GFCI/Doble

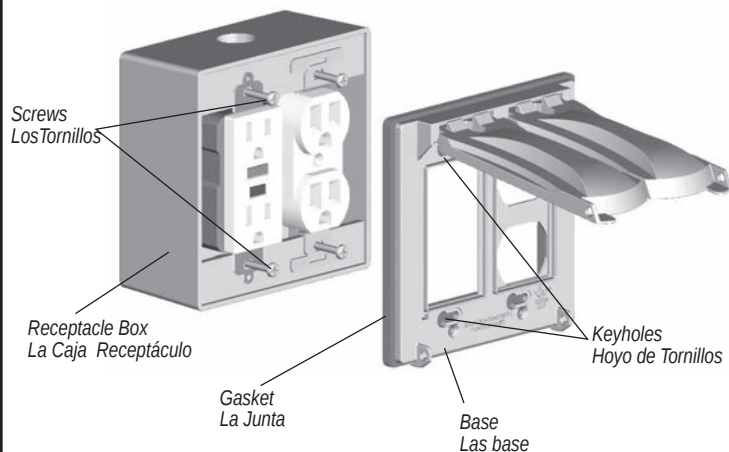

NOTE: Base should be installed on a smooth flat surface. To ensure a weatherproof seal on irregular surfaces such as brick, siding, stucco, etc., a 1/4 inch bead of non-hardening silicone caulk (not included) must be placed between the gasket and the mounting surface.

WARNING: Improper installation of any electrical device can cause serious injury or death.

Turn off power to receptacle. Configure base as shown on other side. Back-out box screws. (Note: Make sure that box is flush or slightly behind the finished surface and that receptacle is flush with the finished surface in accordance with NEC 406.4 and 314.20.) Place gasket over the screws. Using keyholes, place base over screws and against gasket. Tighten screws. Do not over-tighten mounting hardware.

CAUTION: Device must protrude through the base or duplex/round adapters. If not, please use UL approved spacers (not included) to move the device forward in the box.

Desconecte la electricidad al receptáculo. Configure la base como se ilustra al lado. Coloque la empaquetadura sobre los tornillos. (Nota: Asegure que la caja este a nivel con la pared o un poco mas abajo de la superficie terminada y el receptor este a nivel de la superficie terminada de acuerdo con el NEC 406.4 y 314.20.) Coloque la base sobre los tornillos y contra la empaquetadura. Apriete los tornillos. No apriete demasiado los accesorios de montaje.

PRECAUCION: El aparato debe salir de la base o duplex/adaptador redondo. Si no utilice expansiones aprobados por UL (no incluidos) para mover el aparato hacia el frente de la caja.

NOTA: La base deberá instalarse en una superficie plana y lisa. Para asegurar un aislamiento contra intemperie en superficies irregulares tales como ladrillo o revestimiento lateral de cedro, deberá colocarse un cordón de 1/4 in. (6,3 mm) de masilla de silicona (no incluido) que no endurezca entre la empaquetadura y la superficie de montaje.

ADVERTENCIA: La instalación inadecuada de cualquier dispositivo eléctrico puede ocasionar lesiones serias o la muerte.