

**LG LAUNDRY**
**DLEX7600\_E / DLGX7601\_E**

7.3 cu.ft. Super Capacity TurboSteam™ Dryer

**7.3 cu.ft. Capacity**
**EasyLoad™ Door**
**TurboSteam® Technology**
**14 Drying Programs**
**Available in Black Stainless Steel, Graphite Steel and White**


SUMMARY	
Type	Rear Control Top Load Dryer
Capacity	7.3 cu ft
Matching Washer	WT7600H_A
Sensor Dry	Yes
Steam	Yes
Color	White (W), Black Stainless Steel (K)
APPEARANCE	
EasyLoad™ Door	Yes
Intelligent Electronic Controls with LED Display	Yes
Dial-A-Cycle™	Yes
DRYER PROGRAMS	
No. of Programs	14
	Cotton/Normal, Heavy Duty, Bulky / Large, Bright Whites, Sanitary, Allergiene, Tub Clean, Towels, Per. Press, Hand Wash / Wool, Delicates, Small Load, Drain+Spin
DRYER OPTIONS	
No. of Options	11
Options	Wrinkle Care, Custom Program, PGM Save, Child Lock, More Time, Less Time, Signal, Damp Dry Signal, ReduceStatic™, Energy Saver, Default On/Off
Temperature Settings	5
Drying Levels	5
Manual Dry Times	60, 50, 40, 30, 20 min, More-Less
FABRIC CARE FEATURES	
Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes
Steam	Yes
CONVENIENCE FEATURES	
3 Minute Installation Check	Yes
LoDecibel™ Quiet Operation	Yes
End of Cycle Signal	Yes
Drum Light	Yes
Reversible Door	Yes
FlowSense™ Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Child Lock	Yes
Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting
4 Adjustable Legs	Yes
Remaining Time Display/Status Indicator(s)	Yes

SMARTTHINQ® TECHNOLOGY	
SmartDiagnosis™	Yes
NFC Tag On Technology	Yes
Energy Monitoring	Yes (NFC)
ENERGY	
ENERGY STAR® Qualified	Yes
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	Yes
Tub Rear	Painted
Cabinet	Painted Steel
Door / Trim	Glass / Chrome
All Available Colors	White (W), Black Stainless Steel (K)
POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements / Type	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
BTU	10,000 Feet
OPTIONS	
LP Conversion Kit	383EEL3002D
Side Venting Kit	383EEL9001B
DIMENSIONS	
Product (WxHxD)	27" x 44 1/4" x 28 15/16"
Depth with Door Open	50 1/4"
Carton (WxHxD)	29 1/2" x 47 1/8" x 30 31/32"
Weight (Product)	Electric: 129.8 / Gas: 132.5
Weight (Carton)	Electric: 149.6 / Gas: 152.3
WARRANTY	
Parts & Labor	1 Year
UPC CODES	
DLEX7600WE (White)	048231016698
DLGX7601WE (White)	048231016704
DLEX7600KE (Black Stainless Steel)	048231017077
DLGX7601KE (Black Stainless Steel)	048231017084
WT7600HWA (White)	048231016629
WT7600HKA (Black Stainless Steel)	048231017060

## LG LAUNDRY

# DLEX7600\_E / DLGX7601\_E

7.3 cu.ft. Super Capacity TurboSteam™ Dryer

## QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

### DIMENSIONS


A Width	27"
B Height	44 1/4"
C Depth	28 15/16"
D Depth with Door Open	50 1/4"
Carton (WxHxD)	29 1/2" x 47 1/8" x 30 31/32"

### ENERGY / POWER SOURCE

ENERGY STAR® Qualified	Yes
Ratings	CSA Listed
Electrical Requirements	120V, 15 Amps (Gas) / 240V, 30 Amps (Electric)
Type	Gas (DLGX7601_) / Electric (DLEX3700_)
BTU Rating	10,000 Feet


### CONNECTING THE GAS SUPPLY

- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Use only a new stainless steel flexible connector and a new AGA-certified connector.
- A gas shutoff valve must be installed within 6 ft. (1.8 m) of the dryer.
- The dryer is configured for natural gas when shipped from the factory. Make sure that the dryer is equipped with the correct burner nozzle for the type of gas being used (natural gas or propane gas).
- If necessary, the correct nozzle (for the LP nozzle kit, order part number 383EEL3002D) should be installed by a qualified technician and the change should be noted on the dryer.
- All connections must be in accordance with local codes and regulations. Gas dryers MUST exhaust to the outdoors.

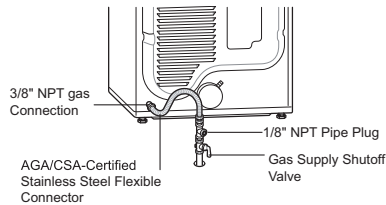


### CONNECTING ELECTRIC DRYERS

- A **4-wire connection** is required for all mobile and manufactured home installations, as well as all new construction **after January 1, 1996**.
- A **3-wire connection is NOT permitted** on new construction **after January 1, 1996**.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.



### DIMENSIONS AND CLEARANCES

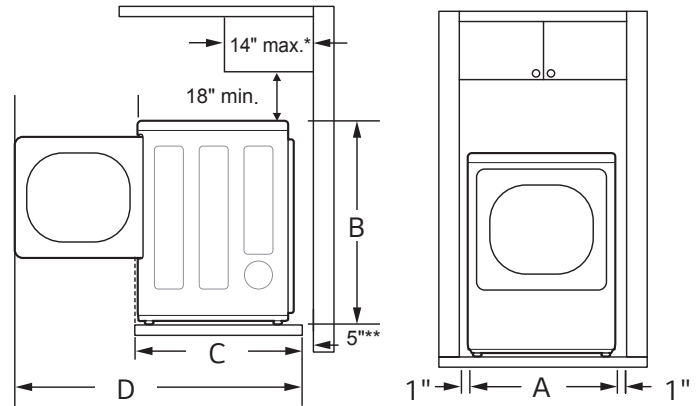



\* Required spacing

\*\* For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.



### VENTING / DUCTWORK

**NOTE:** Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.



- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).
- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
 Recommended a: 4" (10.2 cm)	0	65 ft.(19.8 m)
	1	55 ft.(16.8 m)
	2	47 ft.(14.3 m)
	3	36 ft.(11.0 m)
 Use only for short run installations b: 2.5" (6.35 cm)	0	55 ft.(16.8 m)
	1	47 ft.(14.3 m)
	2	41 ft.(12.5 m)
	3	30 ft.(9.1 m)
	4	22 ft.(6.7 m)