

4" LED Retrofit-Kit Installation Instructions

The units covered in these instructions are intended to retrofit Type IC or Type Non-IC luminaires.

WARNING / ATTENTION

1. Risk of fire. Supply conductors (power wires) connecting to the fixture must be rated 90° C. If uncertain consult an electrician.
2. Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems.
3. Risk of fire or electric shock. If not qualified, do not attempt installation. Contact a qualified electrician.
4. Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings.
5. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
6. This lamp is not intended for use with emergency exit fixtures or emergency lights.

CAUTIONS

1. For your safety read and understand instructions completely before starting installation.
2. Before attempting Installation, check your local electric code, as it sets wiring standards for your locality.

NOTES

1. If luminaire (fixture) is to be switched from a wall switch, make sure black power supply wire is connected to the switch. DO NOT connect the white supply wire to the switch.
2. Make sure no bare wires are exposed outside the wire nut connectors.
3. Do not make or alter any open holes in an enclosure of wiring or electrical components during kits installation.
4. This lamp is not compatible with photo controls, occupancy sensors, or timing devices.

Approved Dimmers

AH Lighting: SDM3/1000/WHITE, SDM/600/WHITE

Almond LUXDM600-12


GE: 18024

Leviton: IPI06-1LZ, IPI10-1LZ, IPL06, 603-6631-A, 6631-A, 6631-LA, 6672, 6683, 6683-10Z, 6683-10Z

Lutron: DVW-600PH-WH, S-603PH-WH

Maxxima: MEW-DM600, MEW-DM620, MEW-DM650

Luminous Intensity Distribution Diagram

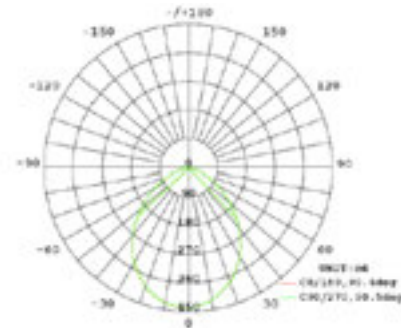


Housing Dimensions

Minimum Housing Dimensions are 4.4" (DIA) X 5.5" (H)

Electrical parameters:

Model	Input Voltage (V)	Input Frequency (Hz)	Input Current (A)	Input Watts (W)
MRL-41300W, MRL-41300NW	120	60	0.11	12

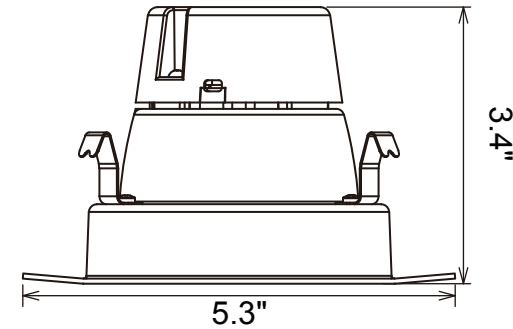

Installation Into Recessed Housing:

STEP1: Turn off the power before installation. Remove the existing diffuser, bulb and trim as applicable.

STEP2: Screw E26 socket adapter into socket in housing. (Figure 1)

STEP3: Tuck all wires into the housing and carefully push the LED trim until its outer edge is flush against the ceiling surface. (Figure 2)

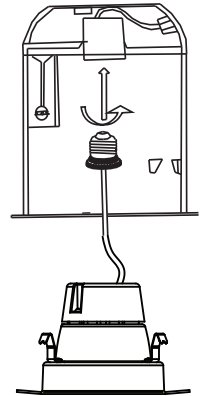


Figure 1

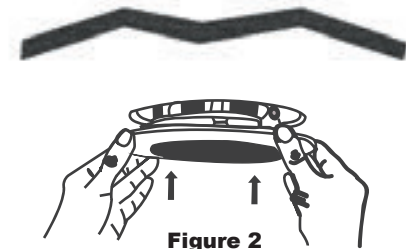


Figure 2

Five Year Warranty:

Maxxima extends a 5 year limited warranty to the original purchase that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.