


# PrimeChime<sup>+</sup>2 Electronic Doorbell Kit (PRCP2A)




## Accessories

Deco and Stucco Buttons Available

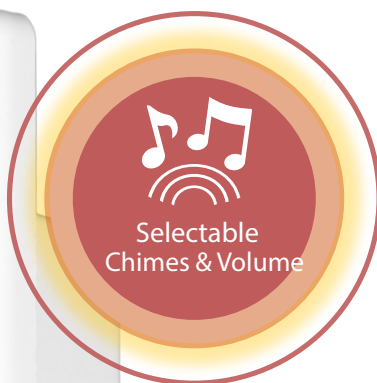

White Nickel Copper Black

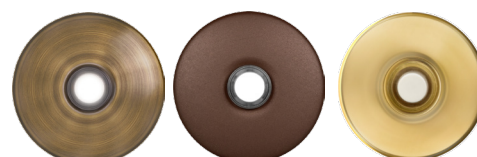

Antique Brass Architectural Bronze Polished Brass



Nickel White

## 📍 Location

- Front Door
- Rear Door
- Gated Entry
- Residential
- Commercial

## ★ Features

- Blue Strobe Light Indicator
- Selectable Volume and Melody
- Compatible with Most Video Doorbells
- Installs Directly into Dual Voltage Box
- Daisy Chain Capability
- Paintable Faceplate
- Front and Rear Chimes
- Durable, UV + Dust Resistant Buttons

## + Options

- Optional Remote Strobe Accessory for additional coverage.
- Deco Buttons: White, Nickel, Copper and Black options
- Stucco Buttons: Antique Brass, Architectural Bronze, Polished Brass, Nickel, and White options

# The Same Doorbell You Love with the Added Features You Need

The **PrimeChime Plus 2A®** (PRCP2A) continues to define what a modern doorbell should be. The latest iteration has been enhanced to meet ADA compliance standards with the addition of an integrated strobe light feature and optional remote strobe. With improved video doorbell compatibility, the PRCP2A is the ideal choice for homebuilders and homeowners alike. The PRCP2A is equipped with all the latest features, offering five user-selected ring tones and five-volume levels accessible through a simple singlebutton, voice-guided interface. The PRCP2A seamlessly combines both line voltage and low voltage into a single unit and features a paintable, screwless faceplate for effortless installation. Each PRCP2A can be wired to two separate doorways, each with their own unique chime tone, so you always know which door to answer. Have more entrances? Two units can be daisy-chained to cover additional doorways and provide additional coverage in larger homes. The PRCP2A kit includes two standard pushbuttons (illuminated), mounting hardware, installation instructions, and a 1-year warranty. Additional decorative and stucco buttons are also available in a variety of colors to match your home's exterior.



## Screwless Faceplate

Easier installation and more modern look with a paintable faceplate

## Daisy Chain

Chain up to 2 PrimeChime® Plus units within 200ft

## Integrated Transformer

Line and low voltage in the same unit

## Construction

- ABS Housing
- Combines line voltage and low voltage in a single unit
- Screwless ABS Faceplate
- Two-wire pigtail for line voltage input
- Multiple poke-in connectors for low voltage output for front and back doorbells
- Selection push button and indicator light behind face plate
- Blue strobe light acts as visual indicator of chime ringing

## Electrical

- Integrated transformer
- Input: 120VAC/60Hz
- Output: 20VAC
- Digital control board with speaker
- Five selectable chime tones :  
Ding Dong, Westminster, 3 note, 5 note, and 7 note
- Five selectable chime tone volumes
- Voice guided setup during selection
- Strobe can be activated/deactivated

## Finish

- Matte White
- Faceplate is field paintable

## Installation


- Installs quickly into a standard two-gang dual-voltage wall box
- Includes two lighted rectangle doorbell buttons
- Compatible with many popular video doorbell buttons\*
- Daisy chain one additional PrimeChime Plus 2® unit<sup>1,2</sup>
- Doorbell buttons connect with 18ga-22ga solid wire<sup>1</sup>
- For installations where higher power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panels

## Warranty

- 1 year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

## Dimensions

PrimeChime® Plus 2A

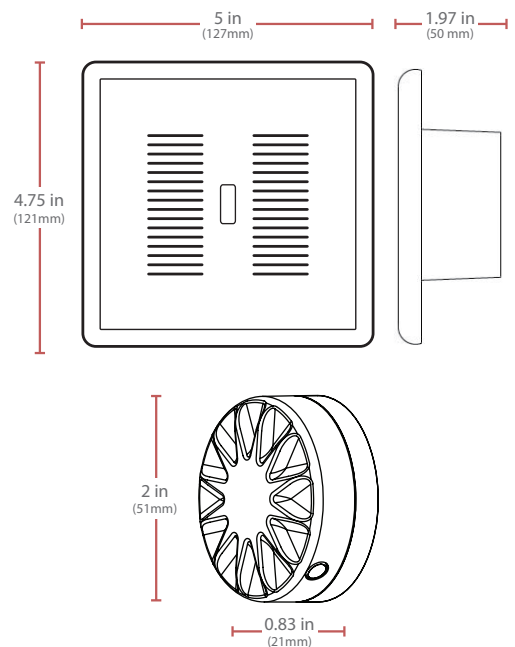

## Recommended Video Doorbell\*\*

Manufacturer	Model
Ring	Video Doorbell   1, 2, 3 Plus
	Video Doorbell Pro
	Video Doorbell Elite
Google Nest	Hello
Skybell	Skybell HD
SimpliSafe	Video Doorbell Pro



\*See compatibility list and/or test for compatibility before installation.

\*\*Not a complete list. Call NICOR or test for compatibility before installation.

<sup>1</sup> Max 100ft total wire length

<sup>2</sup> Each chime requires individual 120VAC input