

EATON'S COOPER LIGHTING - ALL-PRO™

DESCRIPTION

The ALL PRO Series exit APLX7RG is the most economical LED exit for general purpose applications. The durable, injection molded, thermoplastic material resists discoloration due to UV radiation and the energy efficient, low maintenance LED's provide bright illumination. This exit offers universal configurations (single and double face) and have universal mounting capability (ceiling, wall, end) and includes all parts to be configured for red or green letters.

SPECIFICATION FEATURES

Electrical

- Dual Voltage Input 120/277 VAC, 60Hz
- Solid-state Voltage Limited charger
- Brownout circuit Test Switch/Power Indicator Light

Housing Construction

- All components are injection molded, color stable, high impact thermoplastic material
- Designer white textured finish standard
- Components are of snap-fit construction to facilitate under 5-minute installation
- Reinforcing ribs throughout to provide maximum strength
- Molded-in wireways facilitate internal wire routing and connections
- All components including battery and electronics are located inside the exit housing
- Snap-out or snap-in chevron directional indicators have full 3/4" stroke

- Universal exits can be field configured as single face or double face Red/Green
- Snap-fit canopy with mounting screws included with all exits
- Exit can be ceiling, wall, or end mounted
- Universal J-box mounting pattern

Battery

- Sealed Nickel Cadmium
- Maintenance Free, Long Life
- Full Recharge Time: 24 hrs (max.)

Code Compliance

- UL 924 Listed
- Damp Location
- Life Safety NFPA 101
- NEC/OSHA
- Most State and Local Codes
- Operating temperature range 10C to 40C

Lamp Data

- AC LED: Long-life LED lamps provide uniform diffused illumination
- DC: LED DC lamps (Brighter in emergency mode)

Warranty

- Five-year warranty



APLX7RG


THERMOPLASTIC
HOUSING LED EXIT
SELF POWERED

RED AND GREEN LED
OPTIONS INCLUDED

NICKEL CADMIUM
BATTERY

EXIT/EMERGENCY
LIGHTING

DIMENSION

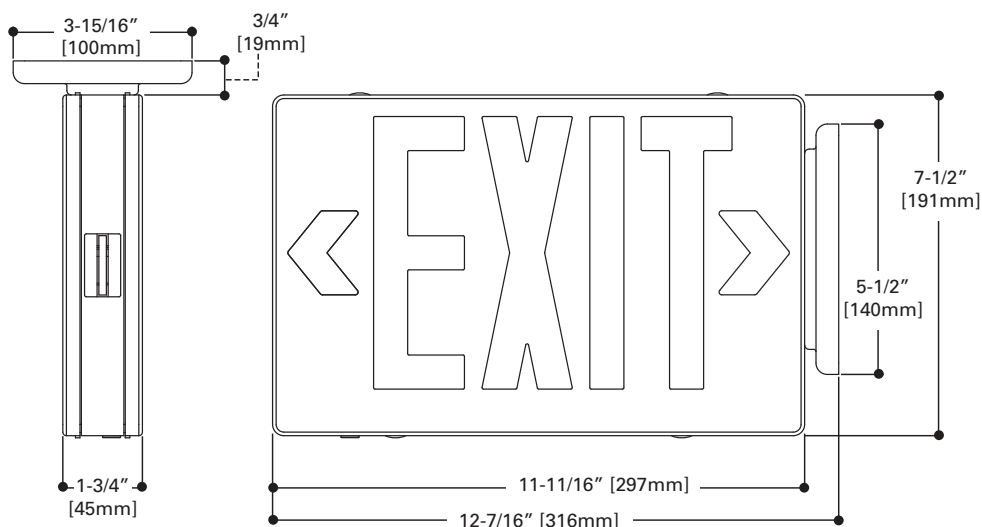

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Eaton's Cooper Lighting Representative for availability and ordering information.

Cooper Lighting
by **EATON**

Visit our web site at www.eaton.com/lighting
Customer First Center 1121 Highway 74 South Peachtree City, GA 30269 770.486.4800 FAX 770.486.4801 2/15 PS502006EN