


Installation



- ① Hole
- ② Expansion Plug
- ③ Screw
- ④ Mounting Hole
- ⑤ Button



1. Use the card to measure hole position correctly and drill 2 holes.
2. Fix 2 expansion plugs into the holes.
3. Fix a screw to the lower expansion plug with a spare space, insert the notch onto the screw.
4. Straighten the whole lamp and fasten the upper screw.
5. Press the button to adjust to demanded working mode.

Notice

1. This is a solar powered lamp, please install it in a location where can get enough sunshine.
2. Please note the lighting time depends on sunshine duration & weather.
3. The lamp will light up when the environmental brightness is less than 30lux.
4. Lamp need to be installed at least 13 feet from the ground.
5. The lamp is equipped with a internal lithium battery, please do not replace it by yourself, and don't dispose it with household garbage to avoid explosion.

For more information, go to: www.totalleds.com

**TOTAL
LEDS**

Solar Motion Light User Manual



1.5W Plus

Light shines front and back

REACH



Please read and follow all instructions to operate.
Save this manual for future reference.

Specification

Product Name	Solar Motion Light
Power/Lumen	1.5W Plus / 220LM
LEDs	SMD2835*14PCS (Front 12PCS+Back 2PCS)
Beam Angle	90°
Li-ion Battery	1200mAh / 3.7V
Solar Panel	0.7Wp, Poly-crystalline silicon
Detection Angle/Area	120°/ ≤6Mtr
IP Degree	IP65 Waterproof
Warranty	24 months (battery 12months warranty)
Lifespan	35,000hrs
Installation Height	At least 13 feet away from the ground.
Packing	Blister Package (1*Solar light,1*Color page, 1*Accessory bag, 1* User manual,1*Measure card)

Features



ZERO Electricity Cost



PIR Inductive



IP65 Waterproof Super



Bright



Solar Powered



Light on/off automatically





Cordless



Multi-functional

2 Working Modes

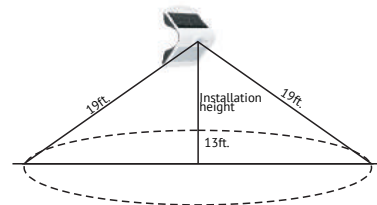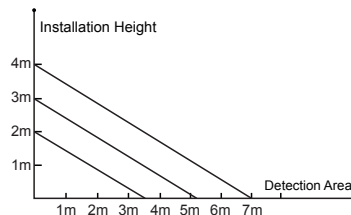


Press the Button to adjust working mode:

Press 1st time for Mode A.
Press 2nd time for Mode B.
Press 3rd time for off.



Mode A: Automatically turns on to full brightness (220lm) when motion is detected in the range 19 feet and then turns to weak brightness (front light on & back light on) in 10 seconds of no motion.

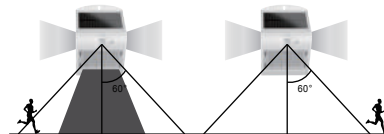

Mode B: Automatically turns on to full brightness (220lm) when motion is detected in the range 19 feet and then turns to weak brightness (front light off & back light on) in 10 seconds of no motion.