JK3000DF GE® 27" Built-In Single Wall Oven

Dimensions and Installation Information (in inches)

Note: These ovens are not approved for stackable or side-by-side installations.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


Note: For 27" built-in single ovens, if marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data. **Ca**


KW Rating				
240V	3.6			
208V	2.7			
Breaker Size				
240V	20 Amps			
208V	20 Amps			



E 23" minimum door opening	Conduit 40"	8-3/4" MJ	AX. Cutout depth 23-1/2" MIN Junction box location 22" to bottom of junction box
23" minimum door opening allowance			

JK3000

	0110000
Cabinet	27"
A – Overlap of oven at top of cutout	1"
B – Overlap of oven over side of edges of cutout	1"
C – Overlap of oven at bottom of cutout	1"
Oven	
D – Overall depth with handle	26-23/32"
Overall depth with handle without handle	23-5/8"
E – Overall height with trim	30-3/16"
F – Overall width	26-23/32"



2 x 4 or equivalent runners level with bottom of cutout and flush with sides of cutout or solid bottom floor.





(Underwriters Bernard Laboratories



imagination at work

For answers to your Monogram® or GE appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.

Specification Revised 10/13

JK3000DF GE® 27" Built-In Single Wall Oven

Undercounter Dimensions and Installation Information


Note: 36" ribbon cooktops are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.


Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Note: Oven is rated for use only under GE 30" standard or sealed burner gas and selected GE 30" smoothtop and Calrod[®] electric cooktops.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.


Side by Side single ovens



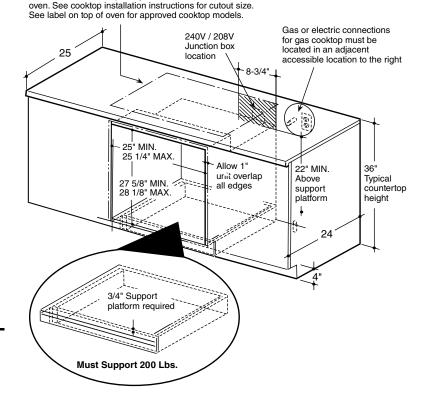

Gas or electric cooktops may be installed over this

Side by Side single ovens under cooktop and counter



NOTE: One cooktop may be centered over either oven in the side-by-side istallation.

For answers to your Monogram[®] or GE appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



Federal Accessibility Standards





320448

imagination at work

JK3000DF GE® 27" Built-In Single Wall Oven

Features and Benefits

- Self-Clean with Steam Clean Option Clean your oven the way you want
- Self-Clean Heavy-Duty Oven Racks Conveniently clean your oven and racks together
- Ten-Pass Bake Element Even baking is assured with heat that covers more surface area
- Eight-Pass Broil Element Get full broil coverage and even browning from edge to edge
- 4.3 cu. ft. Oven Capacity Cook more dishes at once
- Black Gloss Oven Interior Enjoy a clean and sleek appearance
- Electronic Touch Controls Confidently operate the oven with one easy touch
- Hidden Bake Make cleanup easy by eliminating hard-toreach areas
- Audible Preheat Signal Know when the oven is ready
- Certified Sabbath Mode Prepare foods by kosher standards
- Model JK3000DFBB Black on black
- Model JK3000DFCC Bisque on bisque
- Model JK3000DFWW White on white



