


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0040 / H0042 / H0043

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

Contents of Spare Parts:

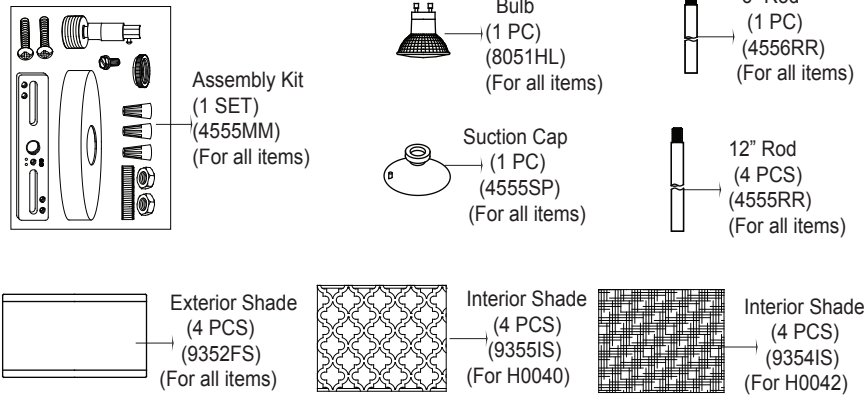

1. Thread the top assembly onto the fixture.
 2. Rod Connections:
 - a. Thread the fixture wire from the top assembly through the lower rod, then secure the lower rod onto top assembly using the threaded pipe.
 - b. Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
 - c. Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.
- The height can be adjustable to 19", 25", 31", 37", 43", 49", 55", 61", 67" or 73" by using the rods.**


3. Thread the fixture wire through the collar, coupling kit, canopy, then secure the rod assembly to the coupling kit. secure the threaded nipple by tightening the set screw.

4. Thread the fixture wire through the nipple-1, hex nut and mounting strap. Install the hex nut onto one end of the nipple-1 leaving about 3/8" (10mm) thread exposed. Install the same end of nipple-1 by screwing into coupling kit, secure nipple-1 by tightening hex nut.

5. Attach the nipple-1 to the mounting strap, then secure it with hex nut.

6. Attach the mounting strap to outlet box by using two mounting screws.

7. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black wire from fixture to the black wire from power source.
 - The white wire from fixture to the white wire from power source.

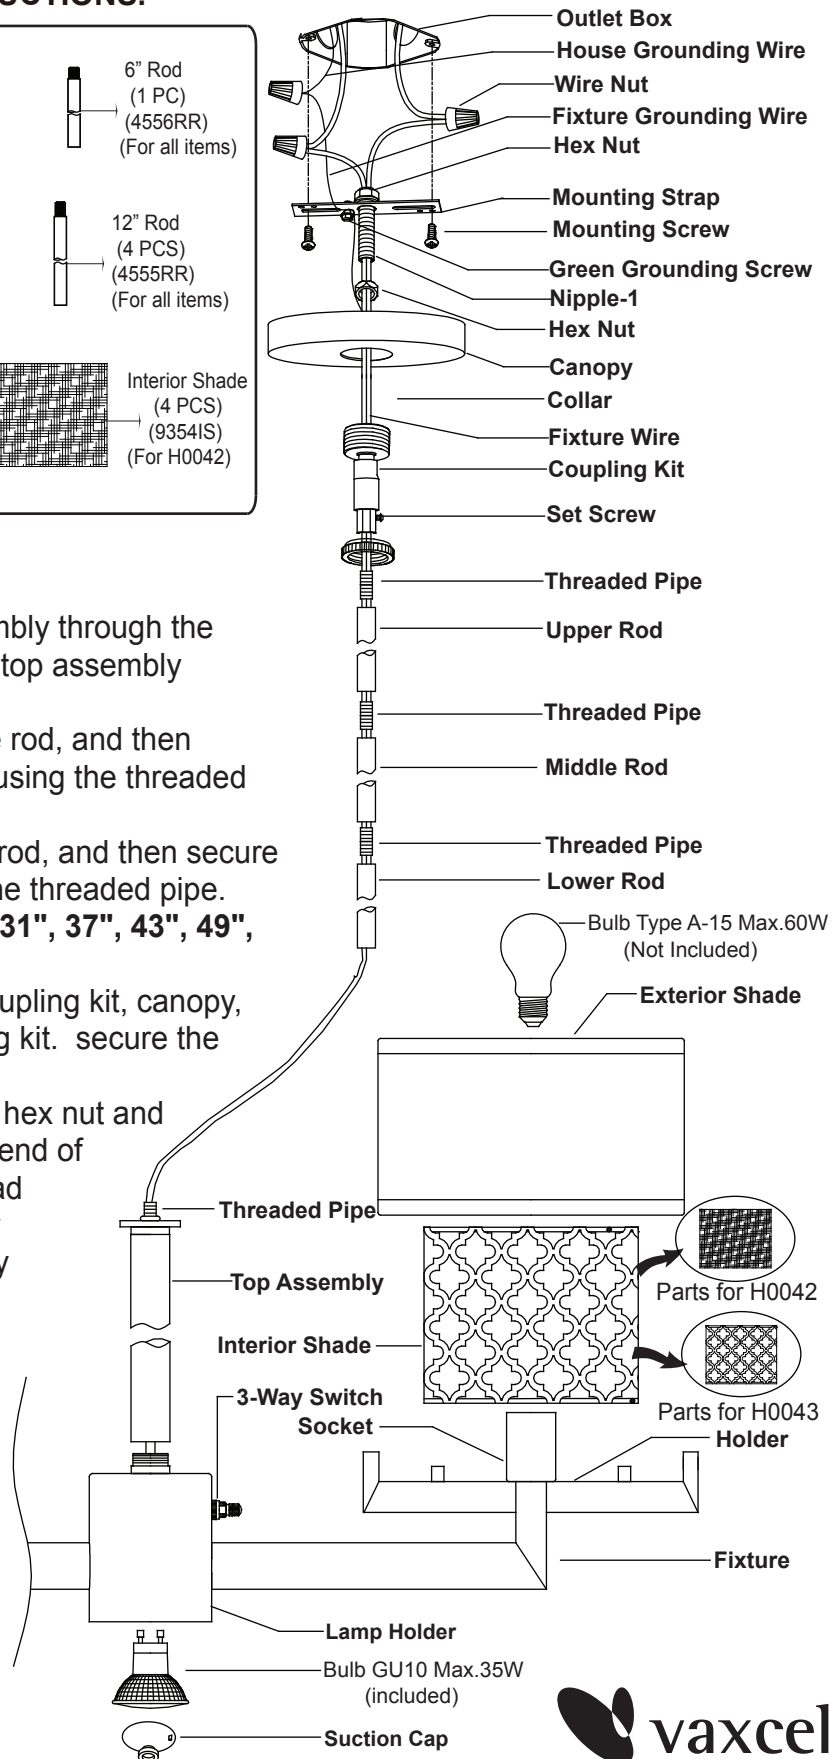

---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.

Carefully put the wires back into the outlet box.

8. Attach the canopy to the mounting strap, and secure it with collar.

9. Place the interior shades onto the fixture, then place the exterior shades onto the fixture, making sure the shades at the center of holders.

Note: No interior shades are H0043, including interior shades(9354IS) are H0042 or including interior shades(9355IS) are H0040.

10. Install sides bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.

11. Install bottom bulb (Included).

a. Attach the suction cap to the top surface of the bulb lens.

b. Insert and twist the bulb (GU10 BASE ONLY) into the socket of the lamp holder using the suction cap.

c. Remove the suction cap from the bulb lens by pulling the knob of the suction cap.

Note: Do not discard the suction cap, it will be needed when replacing the bulb.

12. Turn on the power at the main fuse or circuit breaker box.

13. Choose a mode by turn the 3 - way switch on the side of fixture.

a. Turn the 3 - way switch clockwise, the bottom light will turn off and the side lights will brighten.

b. Turn the 3 - way switch clockwise again, the bottom light will brighten and the side lights will turn off.

c. Turn the 3 - way switch clockwise again, all lights will brighten.

d. Turn the 3 - way switch clockwise again, all lights will turn off.