

Features

- Two lever handles allow for both volume and temperature control.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- 9-5/8" (244 mm) spout with diverter.
- Traditional handshower with 60" (1524 mm) hose.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Bath or wall-mount installation.

Required Products/Accessories

K-101 Wall-mount Adapter Kit
K-126 Riser Tubes

or

K-101 Wall-mount Adapter Kit
K-127 Riser Tubes

or

K-101 Wall-mount Adapter Kit
K-128 Riser Tubes

Recommended Products/Accessories

K-100 72" x 37-1/2" freestanding bath
K-700 freestanding bath
K-710-A Freestanding Bath
K-710-B Freestanding Bath
K-710-P5 Freestanding Bath
K-710-S Freestanding Bath
K-710-W Freestanding Bath
K-711 5.5' Bath
K-712-GCP 5.5' BubbleMassage™ Bath
K-712-GNY 5.5' BubbleMassage™ Bath
K-712-H2 5.5' Whirlpool Bath



Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	PB	Vibrant® Polished Brass
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BRZ	Oil-Rubbed Bronze
	2BZ	Oil-Rubbed Bronze

Floor-mount installation shown. Wall-mount option available.

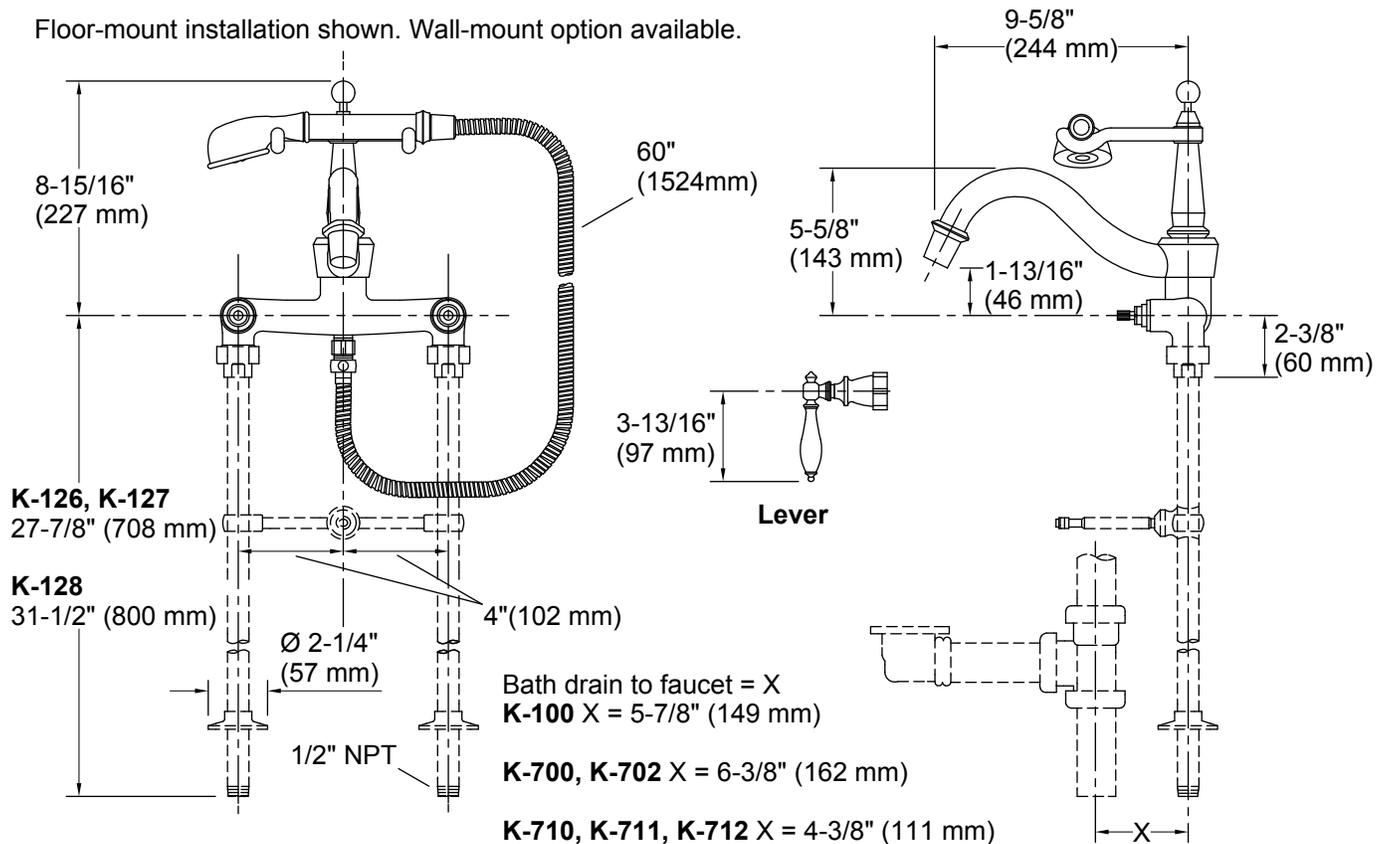

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 15 gal/min (56.8 l/min)

Drain included: No

Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 80 psi (5.5 bar)

Notes

For use with automatic compensating valves rated at 1.3 gal/min (4.9 l/min) or less.

Install this product according to the installation instructions.