

### Features

- Brass construction
- Available with blade handle
- Push-button diverter
- Includes showerhead with arm and flange

### Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

### BATH AND SHOWER FAUCET TRIM

## K-T948

ALSO K-T949, K-T950, K-951, K-952

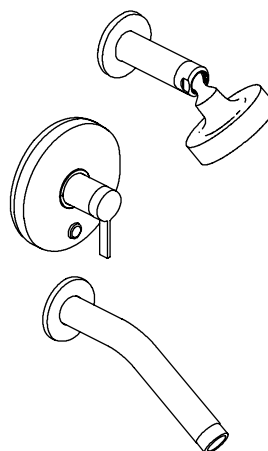

### Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

### Specified Model

For complete faucet, both faucet trim and Rite-Temp® valve must be specified.			
Model	Description		
K-T948-4	Bath and shower trim, blade handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T949-4	Shower only trim, blade handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T950-4	Valve only trim, blade handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-952	Bath spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
<b>Required Accessories</b>			
K-304-*	RiteTemp® valve <b>OR</b>	<input type="checkbox"/> NA	
K-2971-KS	Rite-Temp valve <b>OR</b>	<input type="checkbox"/> NA	
K-11748-K	RiteTemp valve with diverter <b>OR</b>	<input type="checkbox"/> NA	

### Product Specification

The Rite-Temp pressure-balancing single-control bath and shower faucet trim shall be made of brass construction. Bath and shower trim shall include showerhead with arm and flange, and push-button diverter. Shower only trim shall include showerhead with arm and flange. Faucet trim shall be K-T\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_- and Rite-Temp valve shall be K-\_\_\_\_\_-\_\_\_\_\_-NA.

# STILLNESS®

## Required Accessories

K-11748-KS RiteTemp valve with diverter and stops

☐ NA

\* For a complete listing of all the RiteTemp valves, refer to the K-304-\* Specification Sheet or Roughing-In Sheet.

## Optional Accessories

88526 HiFlow Rite-Temp® thin wall installation kit

☐ CP

☐ Other \_\_\_\_\_

1016154 Deep rough-in kit for Rite-Temp® valve – lever or cross handle designs

☐ NA

## Installation Notes

Install this product according to the installation guide.


**NOTICE: Risk of product damage.** Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Install this product according to the installation guide

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (17.8 cm) to 18" (45.7 cm) with single elbow between valve and wall-mount spout.

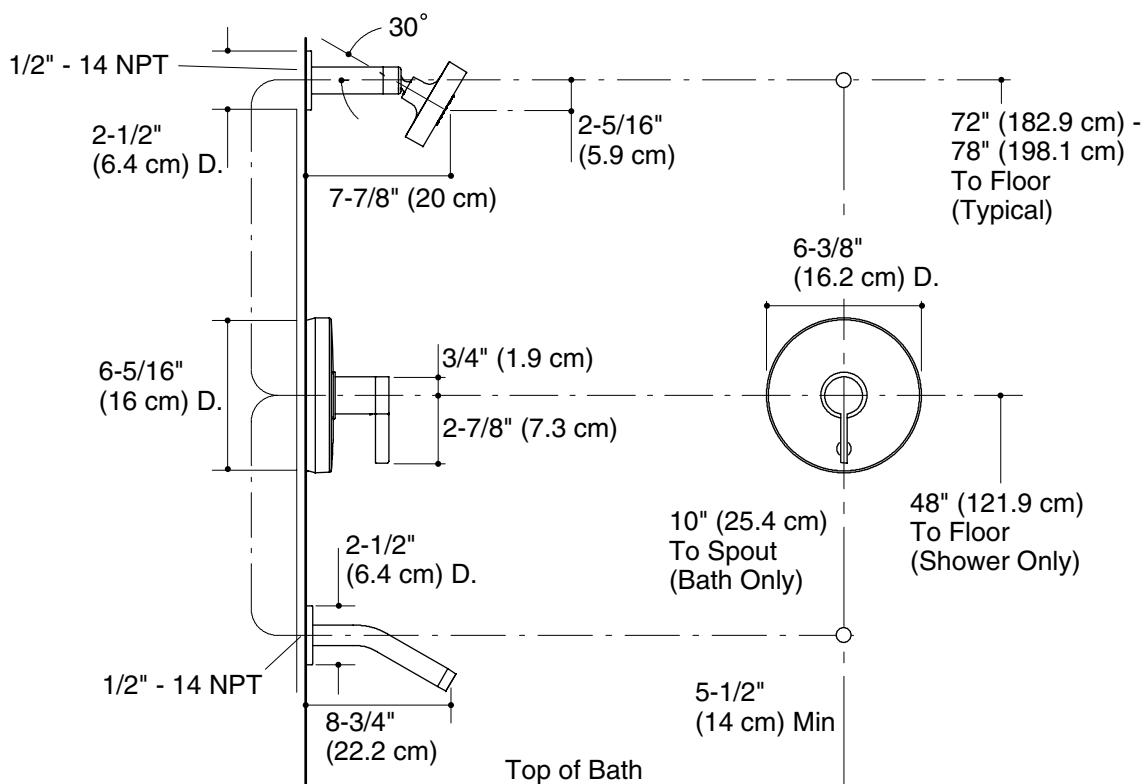

**Product Diagram**