





by Hukoro

## TOOLS REQUIRED



## ASSEMBLY INSTRUCTIONS



### CAUTION


- Inspect the wire insulation for any cuts, abrasions or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.




If you need further assistance, please contact us by Email: [customersupport@superiordecorinc.com](mailto:customersupport@superiordecorinc.com)

**\* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


## HARDWARE INCLUDED



Cover




Decorative Component  
(Hex Nut A, Washer A)



Cover



Centre Pillar




Finial  
(Hex Nut B, Washer B)




Decorative nut




screws (short)




screws (Long)




screws (Thick)



Decorative Pillar  
(TOP)



Decorative Pillar  
(MIDDLE)



Decorative Pillar  
(BOTTOM)




Big Cap Nuts




Electric Wire



Wire Nuts



A Tripod




Iron Hook



Hex Nuts C

## EXPLODED PARTS

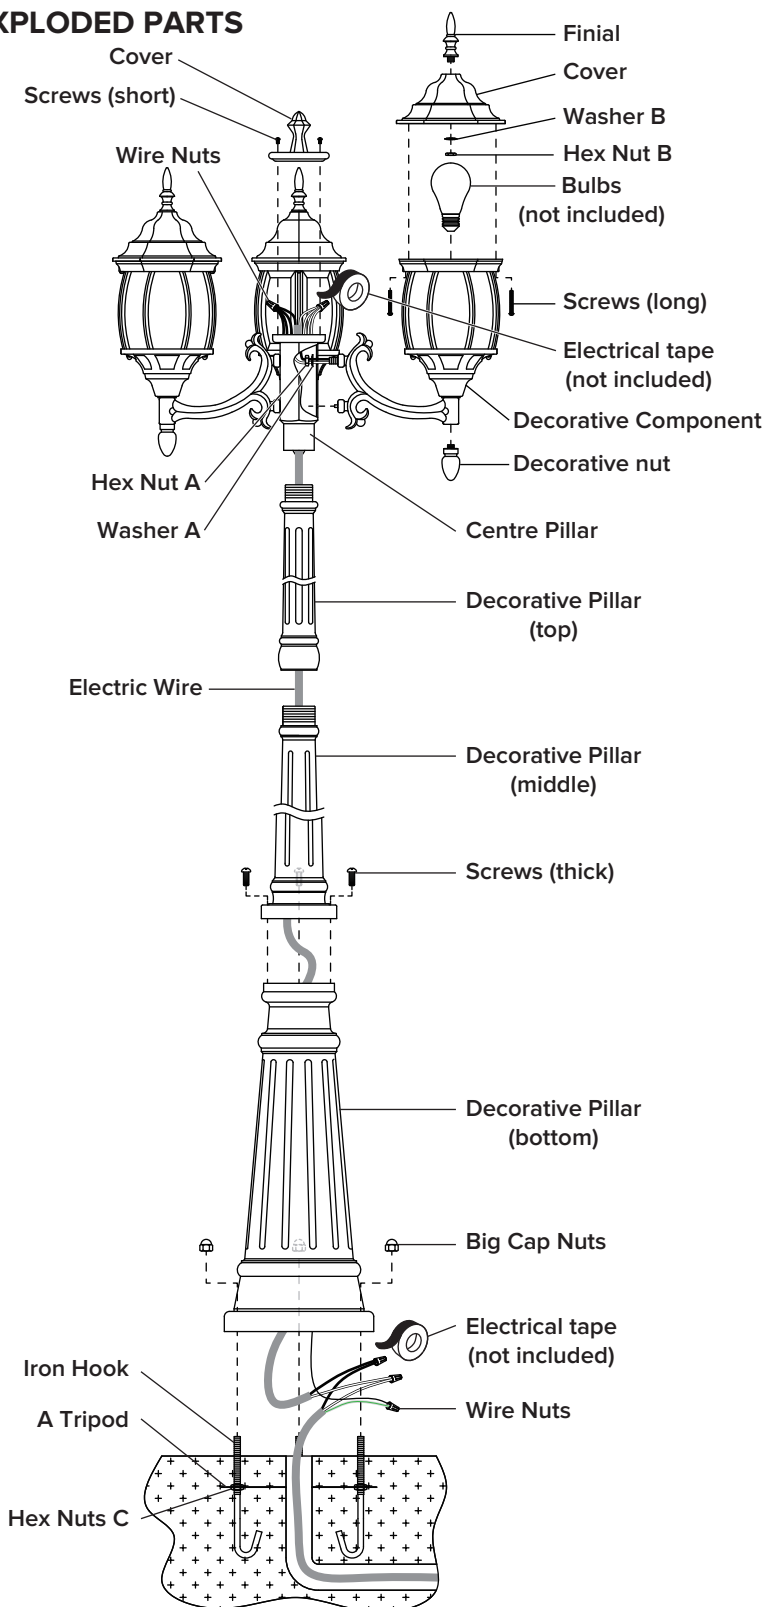


INSTALLATION

STEP 1


Install **iron hook** into the **a tripod** with the **hex nuts C** then embed the component in the ground level with concrete.

Note: the threaded nipple must protrude outward 1 5/8"(41 mm).

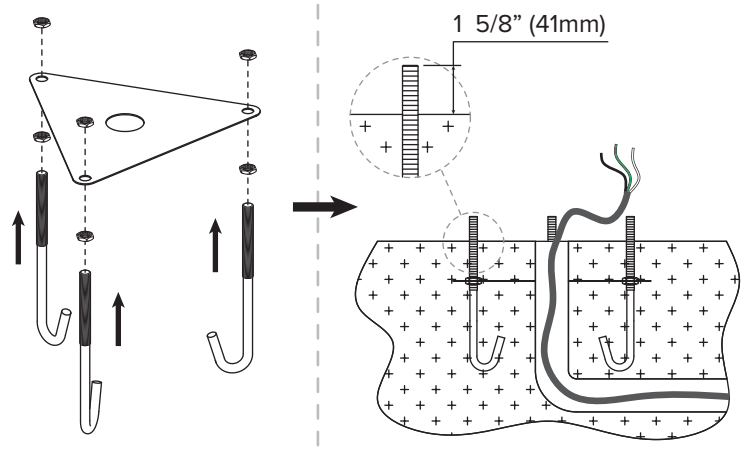



STEP 2

Successively install the **decorative component** into **centre pillar** and secure them with **washer A** and **hex nuts A**.

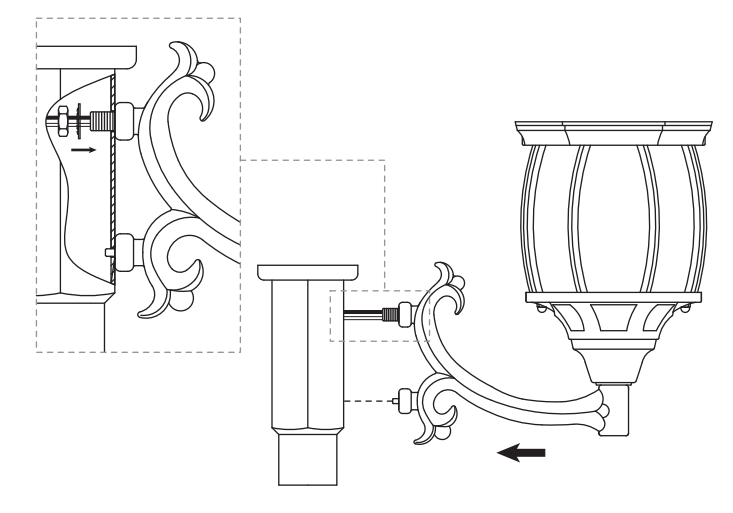


STEP 3

Run the **electric wire** across the **centre pillar**. Next, connect the black wire and white wire with the supplied **wire nuts**. Secure with electrical tape(not included). Then carefully tuck wires back into the **centre pillar**.

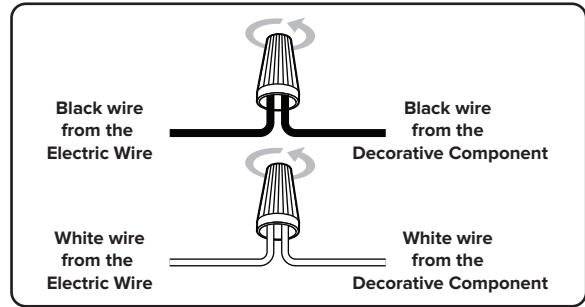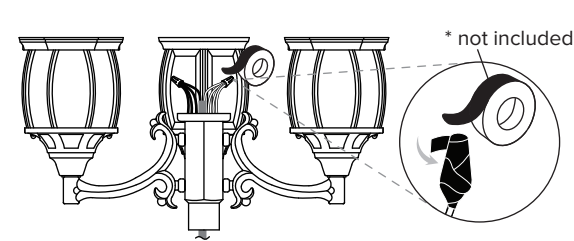


STEP 4

Install the **cover** into **centre pillar** and secure with **screws (short)**.

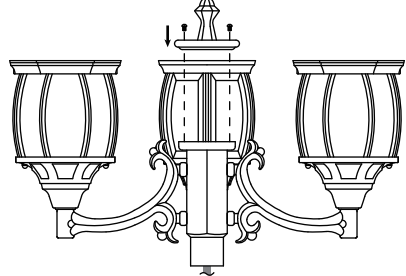

STEP 5

1. Install **decorative nut**.  
2.Install bulb (not included).

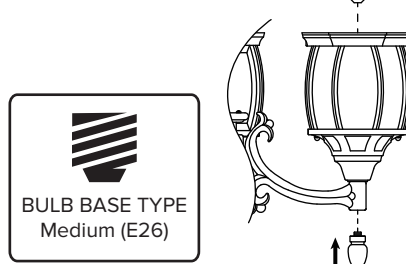


STEP 6

1. Remove the **hex nut B** and **washer B** from the **finial**.  
2. Use the **hex nut B** and **washer B** to attach the **finial** to the **cover**.




STEP 7

Place **cover** onto the **decorative component** and secure with **screws (long)**.

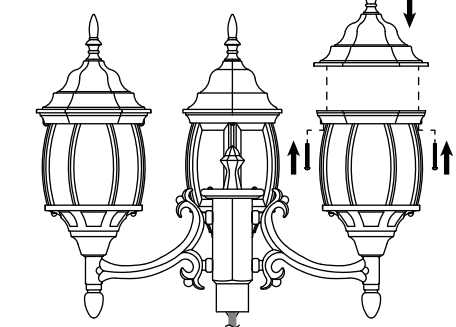


STEP 8

Pass through the **electric wire** into **decorative pillar(top)** and **decorative pillar(middle)**. Secure the **decorative pillar(top)** into **centre pillar**,then secure the **decorative pillar(middle)** into **decorative pillar(bottom)**.

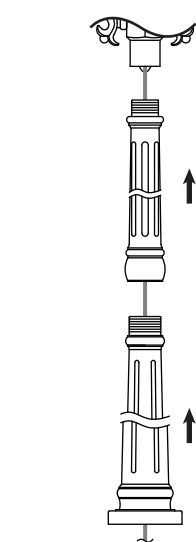


STEP 9

Pass through the **electric wire** into **decorative pillar(bottom)**, attach the **decorative pillar (bottom)** onto **decorative pillar (middle)** using **screws(thick)**.

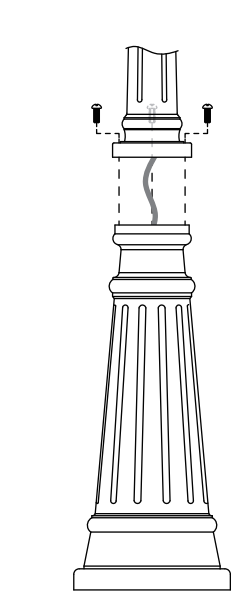

STEP 10

Connect the live wire, neutral wire and ground wire with the supplied **wire nuts**. Secure with electrical tape(not included).

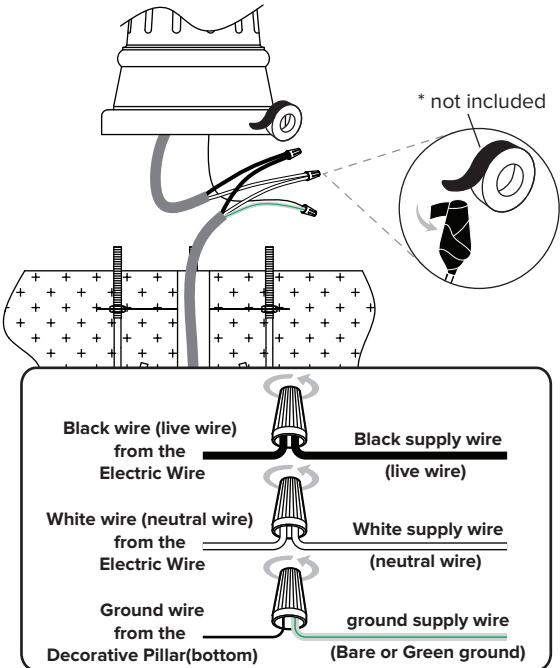

STEP 11

Attach the **decorative pillar to (bottom)** to the **iron hook** through screw holes, and secure it with **big cap nuts**.

