


BATH WHIRLPOOL K-1131 ALSO K-1131-F

Features

- Acrylic
- Drop-in or three-wall alcove
- UL listed
- Pump with air switch and grounding-type plug-in cord
- Optional K-1283 removable apron
- Optional K-9696 whirlpool trim kit in various finishes
- 6 individually adjustable ProFlex® hydro-massage jets
- Molded lumbar supports and armrests
- 72" (1829 mm) x 42" (1067 mm) x 20-1/8" (511 mm)

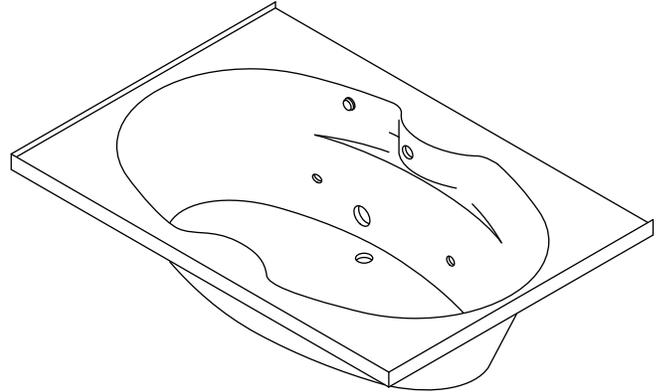

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/Finishes | |
|----------|--|----------------------------|-------------------------------------|
| K-1131 | Bath whirlpool – drop-in style rim | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |
| K-1131-F | Bath whirlpool – tile-in flange on three sides for alcove installation | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |

Recommended Accessories

| | | | |
|---------|----------------------------------|-----------------------------|-----------------------------|
| K-11677 | Adjustable trip lever bath drain | <input type="checkbox"/> CP | <input type="checkbox"/> PB |
|---------|----------------------------------|-----------------------------|-----------------------------|

Optional Accessories

| | | | |
|--------|-----------------------|----------------------------|-------------------------------------|
| K-1283 | Removable apron | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |
| K-1491 | Removable bath pillow | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ |

Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 20-1/8" (511 mm) in height. Bath whirlpool shall be for drop-in rim or three-wall alcove installations. Bath whirlpool shall have 6 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord. Bath whirlpool shall have molded lumbar supports and armrests. Bath whirlpool shall be UL listed. Bath whirlpool shall have an optional K-1283 removable apron and an optional K-9696 whirlpool trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1131-____ or K-1131-F-____.

PROFLEX® 7242

Optional Accessories

| | | | | |
|--------|-------------------------------|-----------------------------|-----------------------------|-------------------------------------|
| K-9696 | Jet trim kit (metal finishes) | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |
|--------|-------------------------------|-----------------------------|-----------------------------|-------------------------------------|

Technical Information

| | | | |
|---|---------------------------------------|----|-----|
| Fixture*: | | | |
| Basin area | | | |
| Basin area, bottom | 53" (1346 mm) x 26" (660 mm) | | |
| Basin area, top | 65" (1651 mm) x 34" (864 mm) | | |
| Weight | 70 lbs (31.8 kg) | | |
| To overflow | | | |
| Water depth | 15" (381 mm) | | |
| Capacity | 78 gal (295.3 L) | | |
| * Approximate measurements for comparison only. | | | |
| Drop-in cut-out | | | |
| | 70-1/2" (1791 mm) x 40-1/2" (1029 mm) | | |
| Pump: | | | |
| | V | Hz | A |
| 1-speed | 120 | 60 | 7.5 |

Required Electrical Service

Dedicated circuit protected with a Class A Ground-Fault Circuit-Interrupter (GFCI) is required:

Pump/control | 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 36 lbs/square foot (164 kg/square meter) floor loading.

The apron must be installed before the finished floor and wall materials.

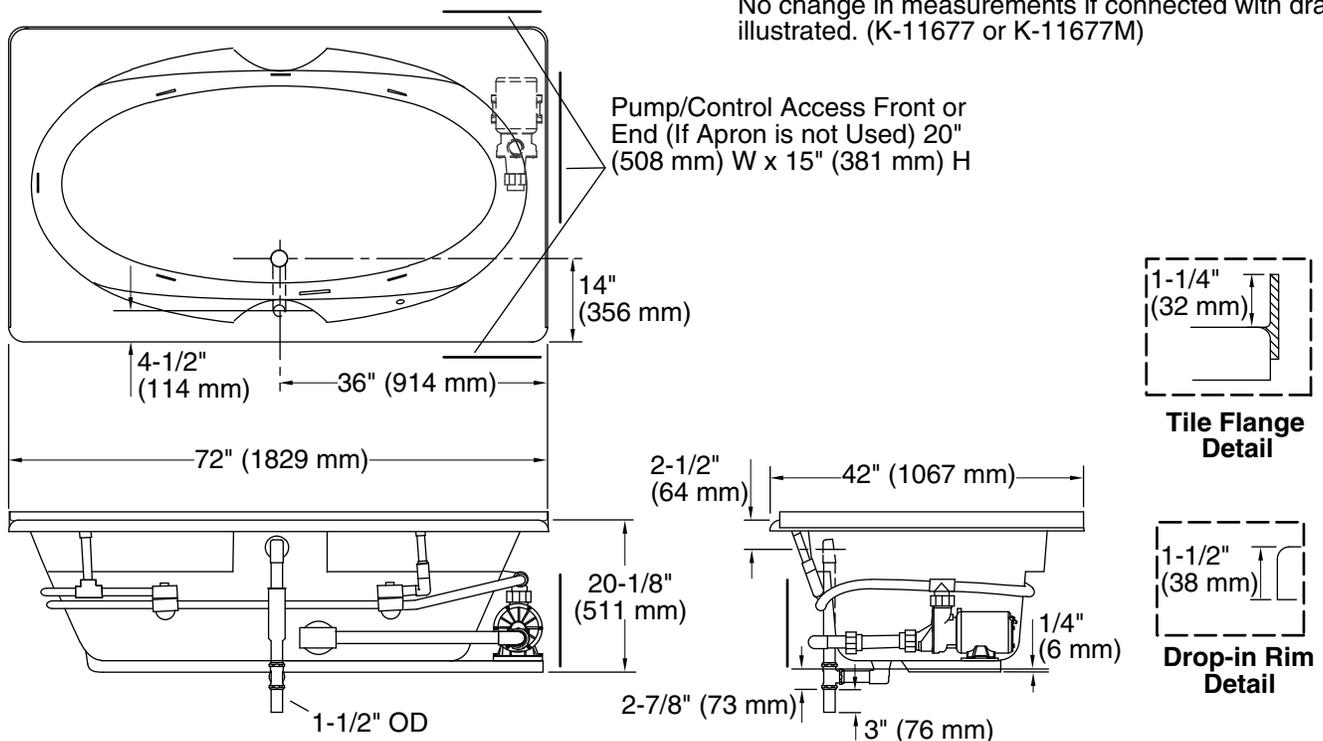

Product Diagram