

## WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.  
WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.  
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

## CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.



















To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

## NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- \* Please make sure that you have all parts indicated before you begin assembly of this item
  - \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
  - \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
  - \*The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed


## Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting plate		1X	J	Metal plate		1X
B	Ground screw		1X	K	Canopy		1X
C	Outlet box screw		2X	L	Swivel		3X
D	Wire nut		5X	M	6" rod		6X
E	Anchor		4X	N	12" rod		6X
F	Tapping screw		4X	O	Fixture body		3X
G	Electric cord		2X	P	Light bulb		3X
H	Hex nut		3X	Q	Canopy nut		2X
I	Spring washer		3X	R	Spanner		1X

# JONATHAN Y

Model#: JYL7581A

Product Dimensions: 36"Lx7.75"W x19"- 49"H

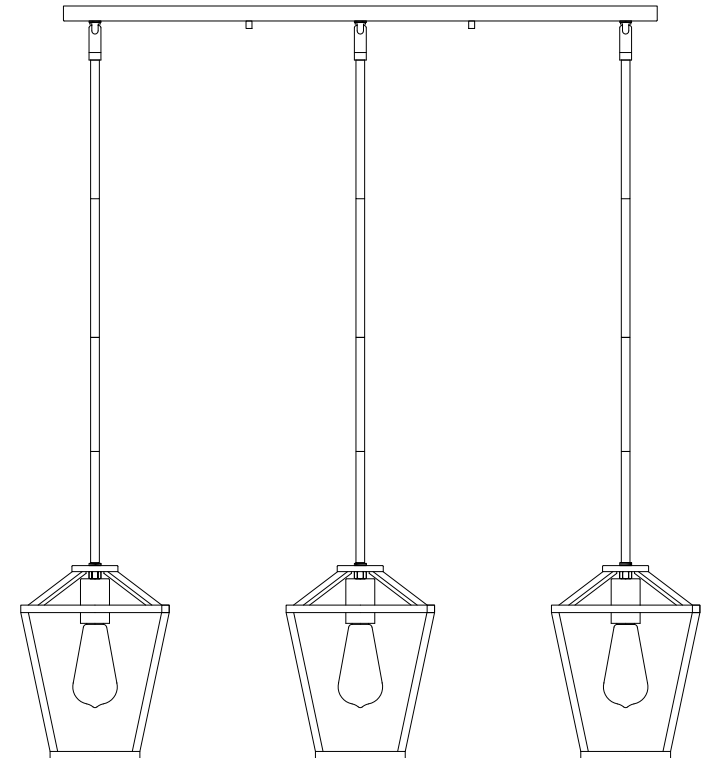


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.  
Estimated Assembly Time: 20 minutes.

- 1. Raise the 12" rod (N) and 6" rod (M) thread to the fixture body (O), then attach the swivel (L) to the rod (M).
- 2. Unscrew the mounting plate (A) from canopy (K), attach the swivel (L) to the canopy (K), secure with metal plate (J), spring washer (I) and hex nut (H) by using the spanner (R).
- 3. Puching the hole and install the anchor (E) to the ceiling.
- 4. Attach the mounting plate (A) to the junction box (not included) with the two outlet box screws(C), secure with tapping screw (F), then connect wires.,

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



\*Note: When parallel wire ( SPT I & SPT II ) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. ( See Illustration on left. )

- Grounding Instructions:
- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(B) on mounting plate, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.
  - b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting plate. Tighten ground screw.

- 5. Raise the canopy (K) thread to the mounting screws, secure with canopy nut (Q).
- 6. Install the light bulb (P) to the socket.

specified on this fixture. Make sure that electrical current is turned off before changing bulbs.  
**PLEASE USE TYPE"A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED BULB MAX 9-WATT, THERE IS LED 4-WATT BULB IN THE BOX**

