

Features

- Metal construction.
- Flexible connections for easy installation.
- Brass valve bodies.
- Pop-up drain with lift rod and tailpiece.
- ADA compliant lever handles.
- Vandal-resistant aerator.
- Red and blue index rings.
- Quarter-turn washerless ceramic disc valves.
- 5-1/8" (13 cm) spout length
- 2.2 gal/min (8.3 l/min) maximum flow rate.



ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

CSA B651

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
--	----	-----------------

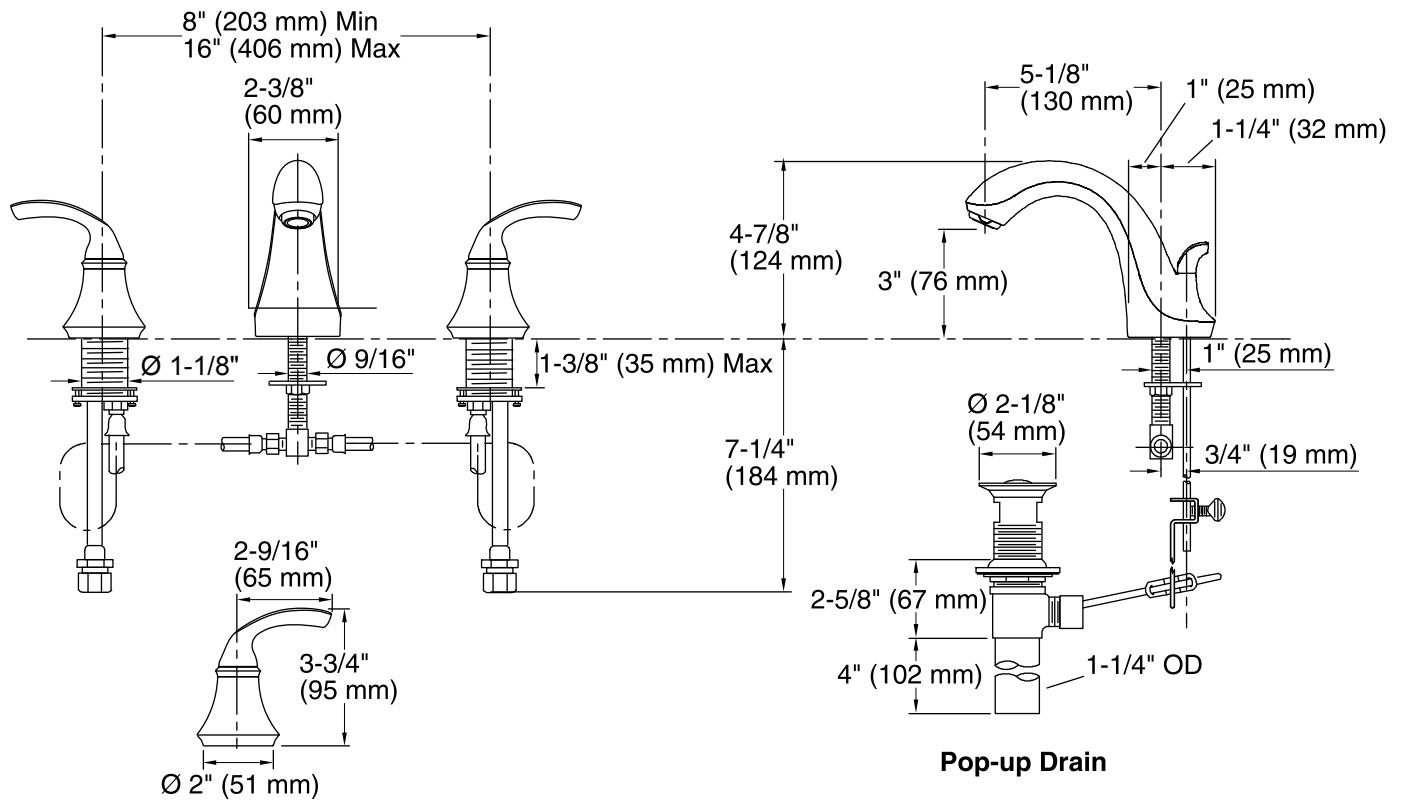

Technical Information

All product dimensions are nominal.

Drain included: YES

Drain tailpiece included: YES

Spout:

Spout reach: 5-1/8" (130 mm)

Handle clearance: 2-9/16" (65 mm)

Faucet:

Flow rate: 2.2 gal/min (8.3 l/min)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.