


BATH WHIRLPOOL K-712-H2

Features

- Cast iron with Safeguard® finish
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 6 Flexjets™
- UL listed
- Less all trim
- 66" (1676 mm) x 36" (914 mm) x 19-1/4" (489 mm)

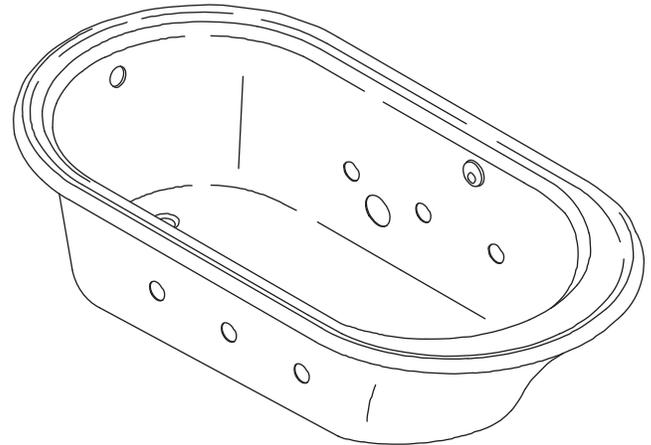

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-712-H2	Bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Recommended Accessories				
K-7103	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1172	Adjustable feet		<input type="checkbox"/> NA	
K-1703	Remote control		<input type="checkbox"/> NA	

Product Specification

The bath whirlpool shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 19-1/4" (489 mm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. Bath whirlpool shall have 6 Flexjets, a variable speed pump with 1.5 kW heater, and back-lit user control. Bath whirlpool shall be UL listed and less all trim. Bath whirlpool shall be Kohler Model K-712-_____-_____.

IRON WORKS®

Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	47-1/2" (1207 mm) x 25" (635 mm)		
Basin area, top	55" (1397 mm) x 29" (737 mm)		
Weight	500 lbs (227 kg)		
To overflow:			
Water depth	12-5/8" (321 mm)		
Capacity	64 gal (242.3 L)		
* Approximate measurements for comparison only.			
Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			
Included component:			
Cut-out template	88051-7		

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 65 lbs/square foot (314 kg/square meter) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements if connected with drain illustrated. (K-7103 or K-7103M)

K-712-H2

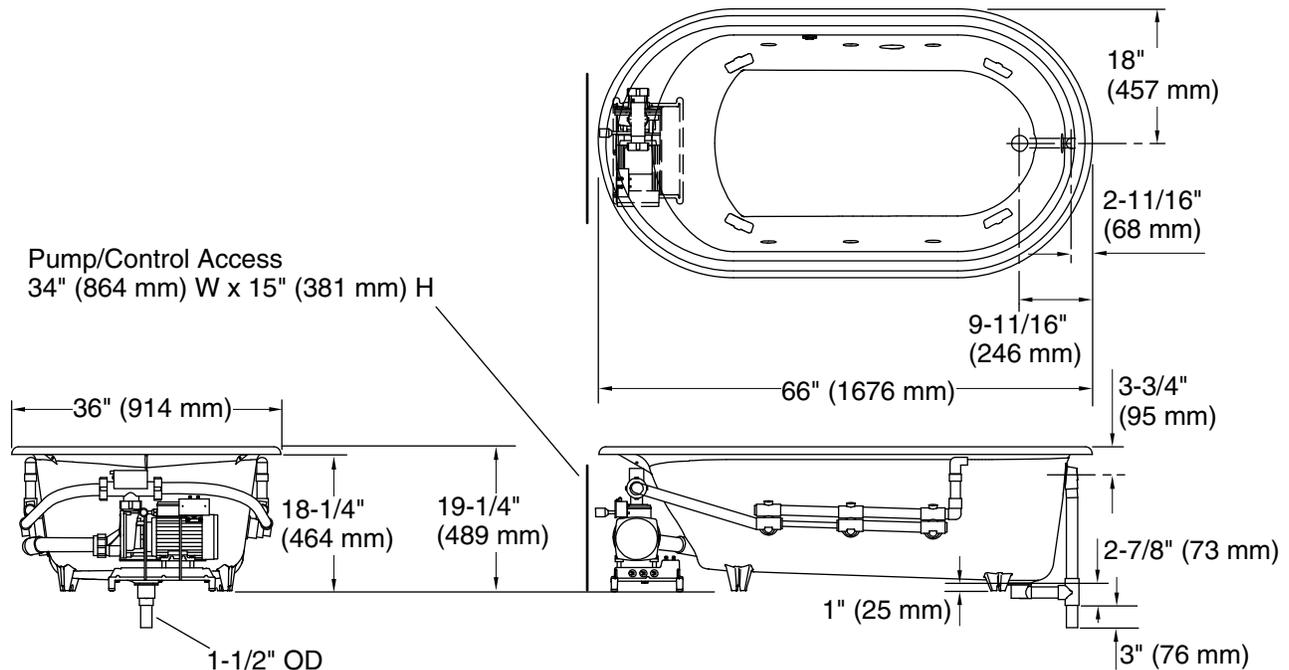

Product Diagram