

DAYTON SPECIFICATIONS

Dayton® Double Bowl Sink Models DEMR23322, DEMR23322R

GENERAL

Sink is formed of #22 gauge, type 300 series nickel-bearing stainless steel. Top mount.

DESIGN FEATURES

Bowl Depth: 6-1/2" (165mm)(large bowl) 5-1/8" (130mm) (small bowl).

Coved Corners: 3" (76mm) vertical (small bowl) and 2-3/4" (70mm) (large bowl) horizontal radius.

Finish: Exposed surfaces have a Polished Satin Finish.

Underside: Fully undercoated.

OTHER

Drain Opening: 3-1/2" (89mm).

OPTIONAL ACCESSORIES

Bottom Grid: GBG2115SS

Cutting Board: CB1516 (large bowl), CBS715 (small bowl),



CB816 (small bowl)

Drain: D1125


Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

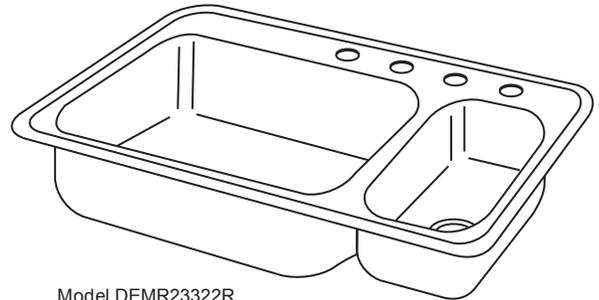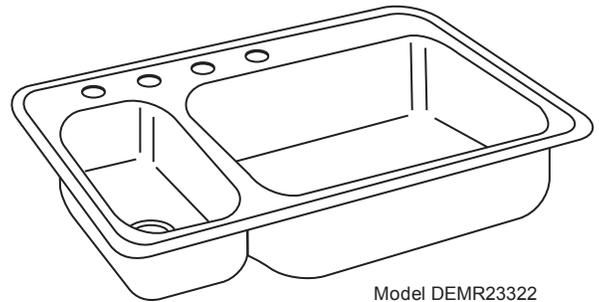

U-Channel Type Mounting System



SEE NEXT PAGE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay

elkayusa.com

2222 Camden Court
Oak Brook, IL 60523

©2013 Elkay

(Rev. 5/13) SPEC00035


Dayton® Double Bowl Sink
Models DEMR23322, DEMR23322R

DAYTON
SPECIFICATIONS


SINK DIMENSIONS (INCHES)*

Model Number	Overall		Inside Each Bowl						Cutout in Countertop (1½" (38mm) Radius Corners)		No. of 1½" (38mm) Dia. Faucet Holes 4" (102mm) Centers	Minimum Cabinet Size
			Left		Right		L	W				
	L	W	L	W	D	L			W	D		
DEMR23322	33 (838mm)	22 (559mm)	7½ (191mm)	15¼ (400mm)	5⅞ (130mm)	21 (533mm)	15¼ (400mm)	6½ (165mm)	32⅝ (822mm)	21⅞ (543mm)	3, 4, or 5	36 (914mm)
DEMR23322R	33 (838mm)	22 (559mm)	21 (533mm)	15¼ (400mm)	6½ (165mm)	7½ (191mm)	15¼ (400mm)	5⅞ (130mm)	32⅝ (822mm)	21⅞ (543mm)	3, 4, or 5	36 (914mm)

*Length is left to right. Width is front to back.

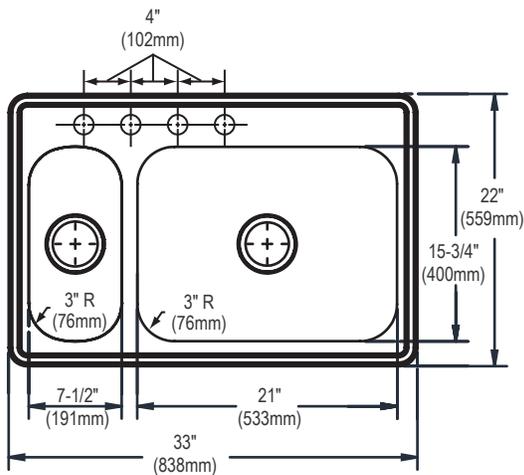

Model DEMR233224 Illustrated

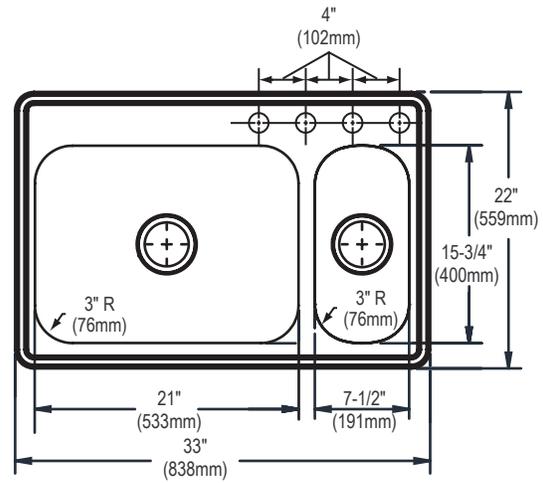

Model DEMR23322R4 Illustrated

Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

