















USE AND CARE MANUAL

3 LIGHT CRYSTAL FLASH MOUNT

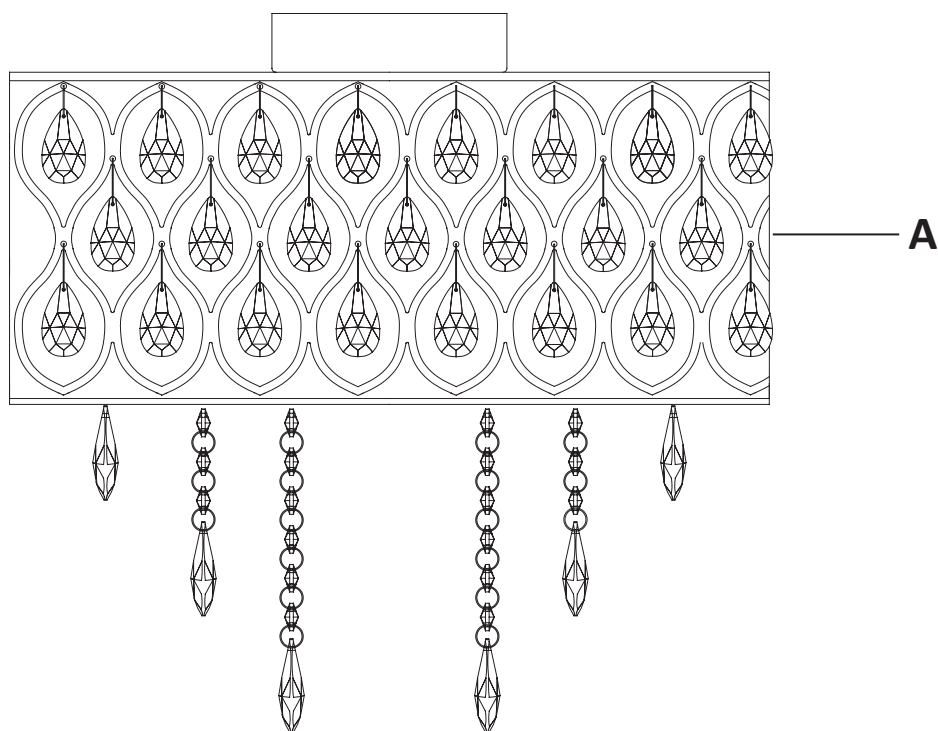

Hardware (Parts are not to scale)

H1 Mounting strip (Pre-assembled to fixture body (A)) 1 pc 	H2 Threaded tube (Pre-assembled to mounting strip (H1)) 1 pc 	H3 Hex nut (Pre-assembled to threaded tube (H2)) 2 pcs 	H4 Lock washer (Pre-assembled to threaded tube (H2)) 1 pc 
H5 Outlet box screw 2 pcs 	H6 Green ground screw (Pre-assembled to mounting strip (H1)) 1 pc 	H7 Wire connector 3 pcs 	H8 Finial (Pre-assembled to threaded tube (H2)) 1 pc 
H9 Crystal "A" (short pothook) 24+1 pcs 	H10 Crystal "B" (long pothook) 48+1 pcs 	H11 Crystal strand "A" (short) 18+1 pcs 	H12 Crystal strand "B" (middle) 9+1 pcs 
H13 Crystal strand "C" (long) 3 pcs 			

THIS MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

IMPORTANT SAFETY INFORMATION

- Please read and understand this entire manual before attempting to assemble, operate or install the product.
 - Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
 - Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
 - All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections. If you do not have electrical wiring experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.
 - Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
 - Do not exceed the recommended wattage. Refer to the re-lamping label on the light socket for maximum wattage.
 - Do not replace a bulb when electrical outlet switch is turned to the “ON” position.
 - Do not immerse your lamp in water; doing so will damage the wire.
 - Keep materials that burn easily away from lighted bulbs.
-


PREPARATION

- Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
 - Tools required for assembly (not included): flathead screwdriver, phillips screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, wire stripper.
-

INSTALLATION


1 Preparing the mounting strip

- Unscrew the finial (H8) and hex nut (H3) from the threaded tube (H2). Remove the mounting strip (H1) from the fixture body (A), and keep the finial (H8) and hex nut (H3) for later use.
- Loosen the hex nut (H3) on the threaded tube (H2) and adjust the threaded tube (H2) so that they extend long enough to protrude through the canopy of the fixture body (A). Then secure the threaded tube (H2) in place using the hex nut (H3) and lock washer (H4).

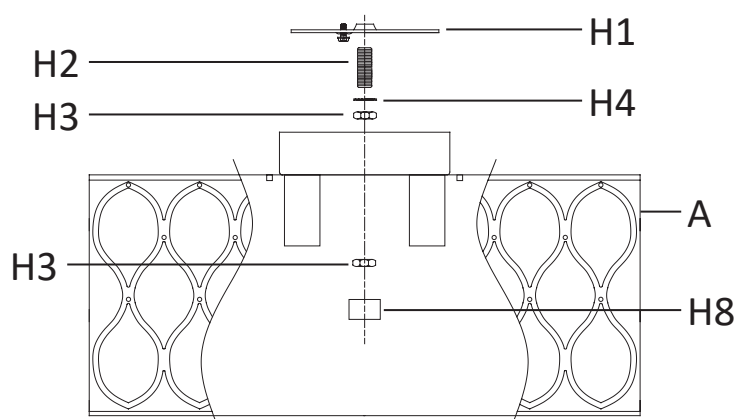

2 Installing the mounting strip


- Fasten the mounting strip (H1) onto the outlet box using two outlet box screws (H5).

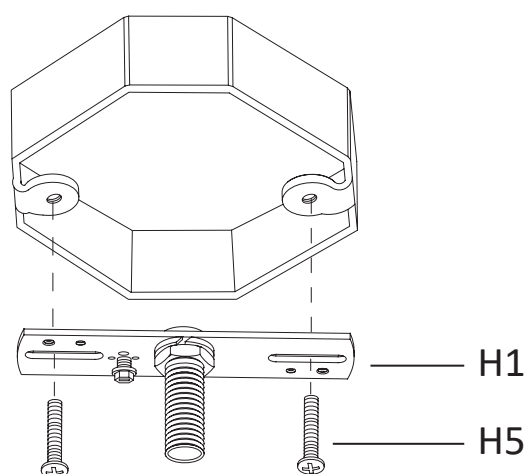

INSTALLATION (continued)


3 Hanging the crystal strands the fixture body

- Hang the crystal "A" (short pothook) (H9) and crystal "B" (long pothook) (H10) to the frame of the fixture body (A) as shown below.
- Hang the crystal strands "A" (short) (H11), the crystal strands "B" (middle) (H12) and the crystal strands "C" (long) (H13) onto the fixture body (A) as shown below.

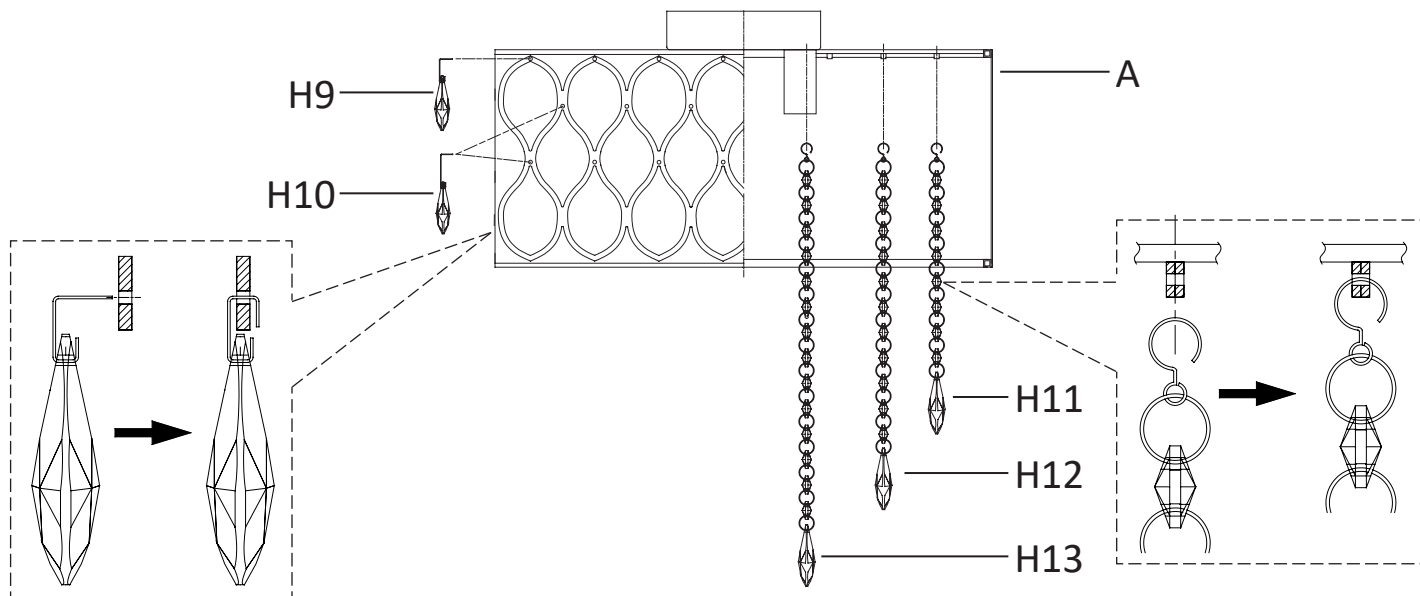

4 Making the electrical connections


- Strip 3/4 in. of insulation from the wire ends.
- Connect the black wire from the fixture to the black wire from the outlet box, then connect the white wire from the fixture to the white wire from the outlet box.
- Connect the bare copper ground wire from the fixture body (A) to the ground wire from the outlet box. The bare copper wire from the canopy must loop one turn the head of the green ground screw (H6) on the mounting bracket (H1) before it is connected to the ground conductor of the supply circuit.
- Cover the wires with wire connectors (H7). Tape the wire connectors (H7) and wires together, and carefully position all wires inside the outlet box.

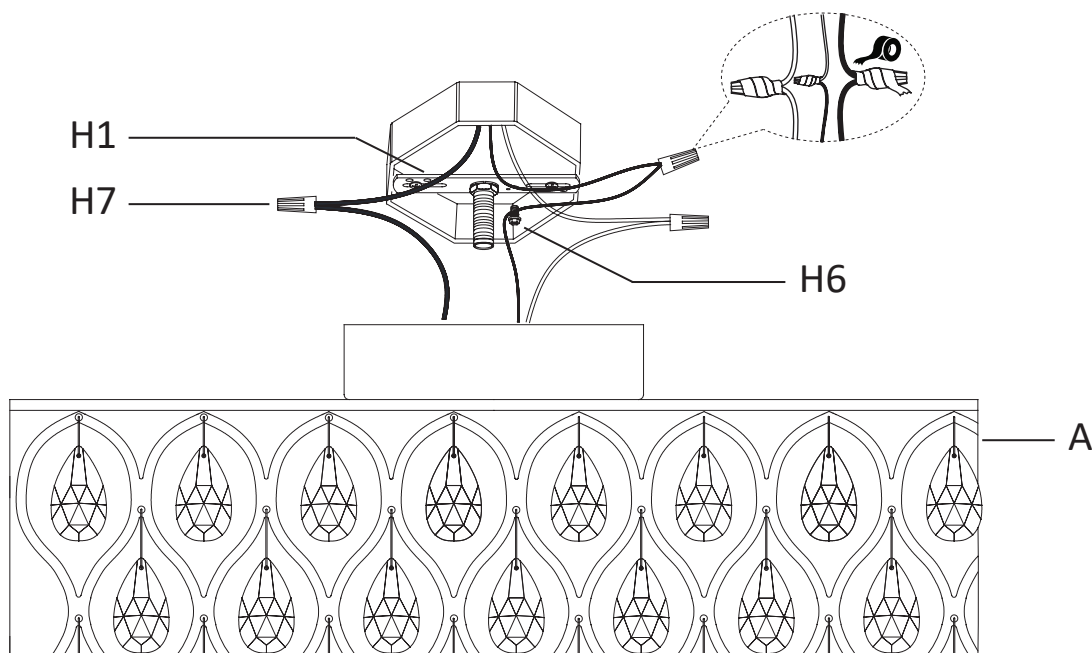

INSTALLATION (continued)

5 Installing the fixture body to the outlet box


- Place the fixture body (A) over the outlet box, let the threaded tube (H2) come through the hole of the fixture body (A), then tighten the hex nut (H3) and finial (H10) to the protruding threaded tube (H2) on mounting strip (H1) until the fixture body (A) is held firmly against the ceiling.

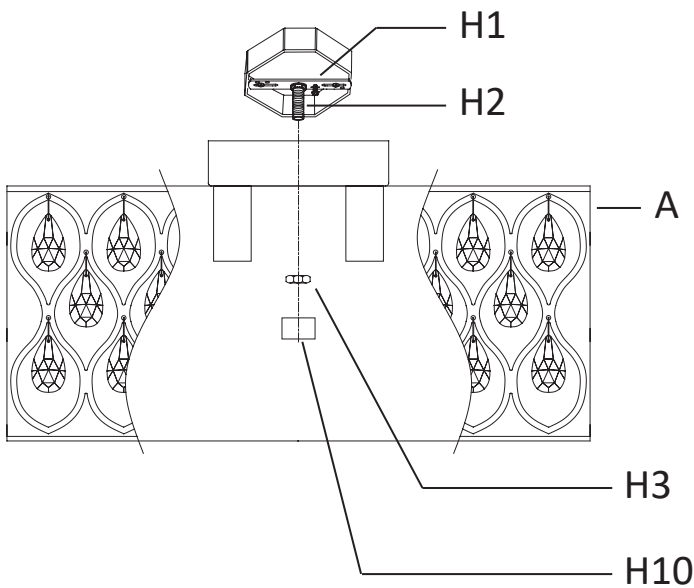

6 Installing the light bulbs

- Install the light bulbs (not provided) into the sockets. Use three **MAX 60 W candelabra base (E12) type "B" bulbs** (recommended).

Note: You can also use three **MAX 9 W candelabra base (E12) self-ballasted LED bulbs**. Do not exceed the recommended wattage.

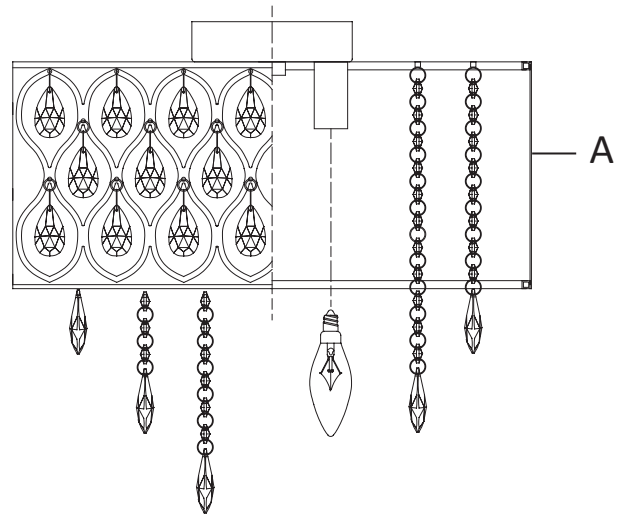

CLEANING

- Do not use any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry, soft cloth to dust or wipe carefully.
- To clean the fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Use a dry or slightly dampened, clean cloth to wipe the exterior surface of the fixture.

TROUBLESHOOTING

- The light does not come on at all:
 - a) Make sure the wall switch and circuit breaker are on.
 - b) Make sure the wiring is correct.
- Fuse blows or circuit trips when light is turned on.
 - a) Check for crossed wires, ensure wiring is correct.