



### **GENERAL**

Highest quality sink bowls seamlessly formed of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Top Mount.

# **DESIGN FEATURES**

Bowl Depths: 5-1/8" (137mm) (left bowl), 7-7/8" (200mm) (right bowl). Coved Corners: 3" (76mm) and 1-3/4" (44mm) vertical and horizontal radius. Bowl and Faucet Deck Recess: 3/16" (4mm) below outside edge of sink. Finish: Exposed surfaces are hand blended to a Lustrous High-

lighted Satin finish.

Underside: Fully protected by heavy duty Sound Guard<sub>®</sub> undercoating to dampen sound and prevent condensation.

#### OTHER

Drain Opening: 3-1/2" (89mm).

Sink complies with ASME A112.19.3/ CSA B45.4

UPC C Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

# **OPTIONAL ACCESSORIES**

Rinsing Baskets: LKWRB2115SS, LKWRB715SS or LKWERBSS.

Bottom Grid: LKWBG2115SS. Cutting Board: CB816 or CBS715.




Model LMR33224

### **SINK DIMENSIONS\***

Quick-Clip® Model Number	Overall		Inside Left Bowl			Inside Right Bowl			Cutout in Countertop (1-1/2"(38mm) Radius Corners)		No. of 1-1/2"(38mm) Dia. Faucet Holes 4"(102mm) Center	Minimum Cabinet Size
Ivanibei	L	W	L	W	D	L	W	D	L	W		
LMR3322	33 (838mm)	22 (559mm)	7½ (191mm)	15¾ (400mm)	5½ (130mm)	21 (533mm)	15¾ (400mm)	7 <sup>7</sup> / <sub>8</sub> (200mm)	32¾ (822mm)	21¾ (543mm)	1, 2, MR2, 3, 4, or 5	36 (914mm)

<sup>\*</sup>Length is left to right. Width is front to back.

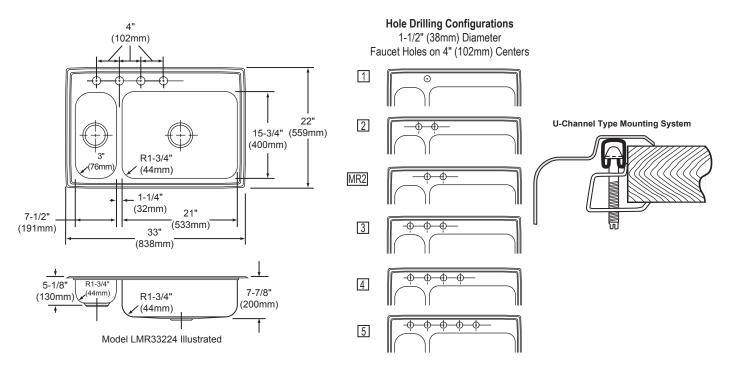

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers' offerings, be certain these features are not overlooked.