

DAYTON[®]

SPECIFICATIONS

Dayton[®] Undermount Double Bowl Sink Model DXUH312010 Series

GENERAL

Sink is formed of #18 (1.2mm) gauge, 300 series nickel bearing stainless steel. Undermount.

DESIGN FEATURES

Bowl Depth: 8" (203mm) small bowl, 10" (254mm) large bowl.

Underside: Sound dampening pads with spray undercoating to dampen sound and reduce condensation.

Finish: Exposed surfaces are polished to a Radiant Satin finish.

OTHER

Drain Openings: 3-1/2" (89mm).

NOTE: All Dayton undermount sinks are designed to affix easily to the underside of any solid surface countertop.

OPTIONAL ACCESSORIES

Bottom Grid: GBG1415SS (small bowl), GBG1318SS (large bowl)

Drain: D1125

Cutting Boards: CB1516 (small bowl), CBR1316 (large bowl) (sink must be installed with a 1/2" reveal for cutting board to fit properly)

Rinsing Baskets: LKWRB1316SS (small bowl), LKWRB1318SS (large bowl), LKWERBSS (either bowl)

Utensil Caddy: LKWUCSS

Mounting Clip: LKUCLIP8 (2 packages required)

Template: 64180279

Sink complies with ASME A112.19.3/ CSA B45.4

 Sinks are listed by IAPMO[®] as meeting the applicable requirements of the Uniform Plumbing Code[®], International Plumbing Code[®], and National Plumbing Code of Canada.

SINK KIT

DXUH312010LDF includes: (1) Sink - DXUH312010L, (1) Faucet - LK1501CR, and (2) Drains.

DXUH312010RDF includes: (1) Sink - DXUH312010R, (1) Faucet - LK1501CR, and (2) Drains.

DXUH312010LDFBG includes: (1) Sink - DXUH312010L, (1) Faucet - LK5000CR, (1) Bottom Grid - GBG1318SS, and (2) Drains.

DXUH312010RDFBG includes: (1) Sink - DXUH312010R, (1) Faucet - LK5000CR, (1) Bottom Grid - GBG1318SS, and (2) Drains.

FAUCET FEATURES

LK1501CR

- Chrome finished, single-lever kitchen faucet with side spray.
- Flexible supply tubes with 1/2" (13mm) male IPS adapters.
- Two 1 3/8" diameter faucet holes required.

LK5000CR

- Chrome finished, single-lever kitchen faucet with pull-down spray.
- Braided stainless steel supply lines.
- Three 1 3/8" diameter faucet holes required.

Max counter thickness: 2.5" (63mm).

Faucets comply with: ADA, ANSI/NSF61, ASME A112.18.1/CSA B125.1, cUPC, CA AB1953


Faucet flow rate: 1.5 GPM/5.7 L/min at 60 P.S.I.G.

BOTTOM GRID FEATURES


Nickel-bearing stainless steel
Bright finish

DRAIN FEATURES

Stainless steel body and strainer.
Fits 3-1/2" (89mm) opening.

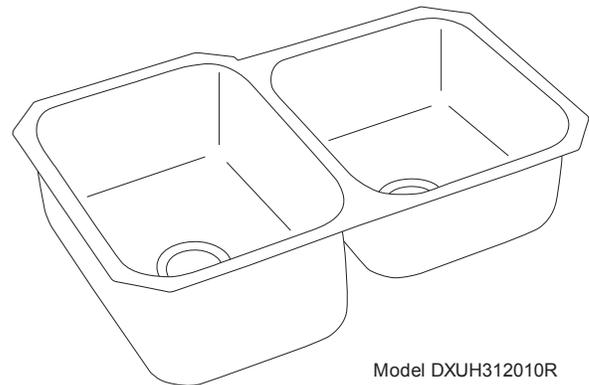



Model DXUH312010R

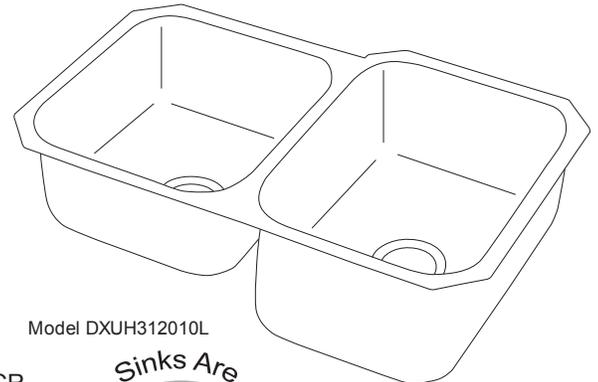


Model DXUH312010L



LK1501CR

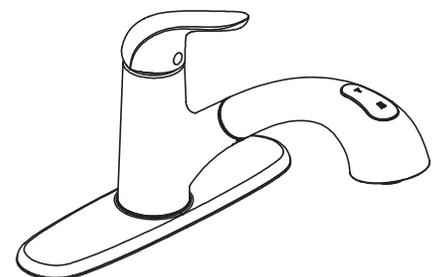

LK5000CR



GBG1318SS

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

DAYTON[®]


SPECIFICATIONS

Dayton[®] Undermount Double Bowl Sink Model DXUH312010 Series


SINK DIMENSIONS (INCHES)*

Model Number	Overall		Inside Left Bowl			Inside Right Bowl			Minimum Cabinet Size
	L	W	L	W	D	L	W	D	
DXUH312010L	31-3/4 (806mm)	20-1/2 (521mm)	14 (356mm)	15-3/4 (400mm)	8 (203mm)	13-1/2 (343mm)	18 (457mm)	10 (254mm)	36 (914mm)
DXUH312010R	31-3/4 (806mm)	20-1/2 (521mm)	13-1/2 (343mm)	18 (457mm)	10 (254mm)	14 (356mm)	15-3/4 (400mm)	8 (203mm)	36 (914mm)

*Length is left to right. Width is front to back.

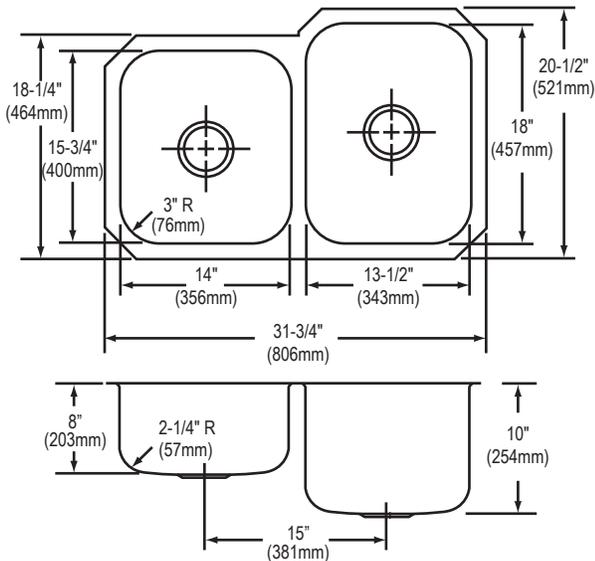

Model DXUH312010L Illustrated

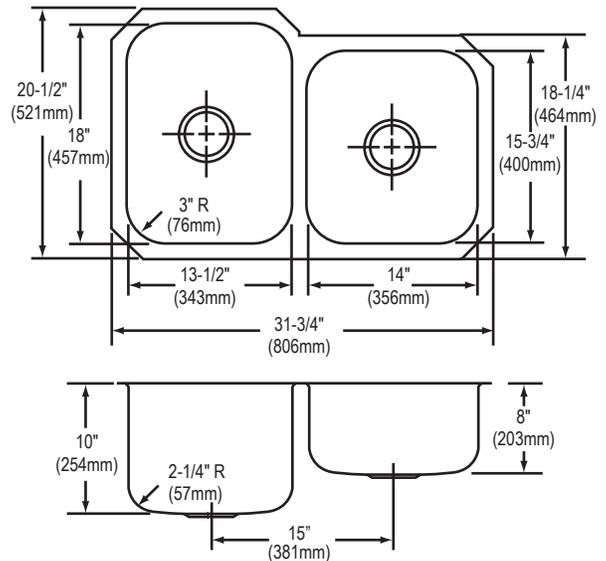

Model DXUH312010R Illustrated

Electronic Dual Template Mounting Option (Download DXF File from www.elkayusa.com)

