

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.  
WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT  
BREAKER BEFORE INSTALLATION.  
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR













CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.  
To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.  
Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


- \* Please make sure that you have all parts indicated before you begin assembly of this item
  - \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
  - \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
  - \*The external flexible cable or cord of this luminaire cannot be replaced
- If the cord is damaged, the luminaire shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	G	Canopy Nut		1X
B	Mounting Screw		2X	H	Clocsable link/cap		2X
C	Ground Screw		1X	I	Fixture Loop		1X
D	Wire Nut		3X	J	Chain		1X
E	Canopy		1X	K	Bulb		1X
F	Hanging Loop		1X	L	Fixture Body		1X



Model#: JYL7618  
Product Dimensions: 8"L X 8"W X 18.5-77.5"H

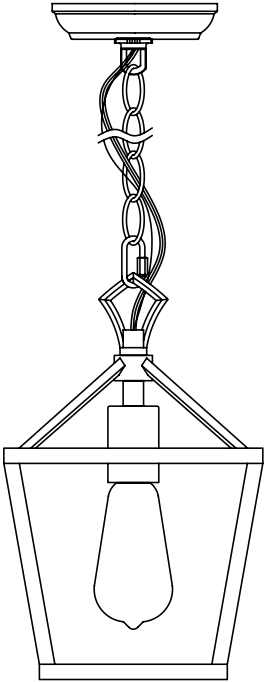

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to [cs@jonathany.com](mailto:cs@jonathany.com)

Estimated Assembly Time: 20 minutes.

- 1. Tighten the Fixture Loop (I) onto the fixture body (L).
- 2. Screw the Chain (J) to the Hanging Loop (F) and the Fixture Loop (I) with Closable link/cap (H) as diagram.
- 3. Weave the 2 wire power cord and bare ground wire through every other loop to the chain(J), center holes of Hanging Loop(F), Canopy(E) & Mounting Plate(A) as diagram.
- 4. Slide the Canopy Nut(G) then the Canopy(E) to the end of the Chain(J).

Connect,Hot,Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	* Parallel Cord (square & ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



\*Note: When parallel wire ( SPT I & SPT II ) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. ( See Illustration on left. )

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.
- 5. Attach the mounting plate (A) onto the junction box with two mounting screws (B).
- 6. Slide the canopy (E) upward along the chain(J) till the ceiling surface. Fix it by rotating the canopy nut(G) clockwise to engage it with the threaded portion of the hanging loop (F) until secure. Do not over tighten this nut.
- 7. Insert the bulbs(K) into the sockets until secure.

**PLEASE USE ON/OFF TYPE"A" BULB MAX 60-WATT OR CFL BULB MAX13 -WATT OR LED BULB MAX9 -WATT**  
**THERE ARE LED 1PCS 4WATT BULB IN THE BOX**

**ENJOY YOUR LAMP**

