

## SPECIFICATIONS

Model LKAV2031

## FEATURES

- Single hole top mount installation
  - One 1 1/2" (38mm) faucet hole required
  - Maximum countertop thickness 2.5" (63mm)
- Single-lever faucet
- · Pull-down spray with aerated flow and spray function
- Solid brass construction
- Removable ceramic disc cartridge
- 255° swing spout
- Flexible supply tubes with 3/8" female compression ends
- Available in the following finishes:
  - Polished Chrome LKAV2031CR
- Satin Nickel LKAV2031NK
- Ship weight is 8.8lbs. (4.0Kg)
- Maximum flow rate
  - 2.2 GPM/8.3 L/min at 60 P.S.I.G.


## WARRANTY

• Limited Lifetime

## COMPLIES WITH:

- ANSI/NSF61
- ASME A112.18.1/CSA B125.1
- CA AB1953/VT S152
- cUPC Certified



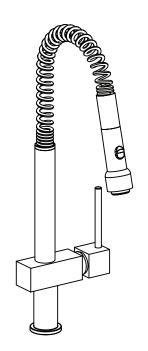

Avado® Single Handle Pull-Down Kitchen Faucet

