


S2060-SF

# HANGMAN SIMPLE MOUNT TV HANGER®



Scan for Video Demo

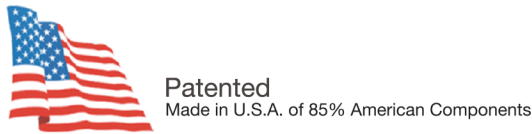


LED/LCD TVS (81.28cm - 203.2cm)  
**32"-80"**  
**125lbs. / 56 kg**


## Parts List

**NOTE:** Not all hardware included will be used.

(1) Wall Bracket

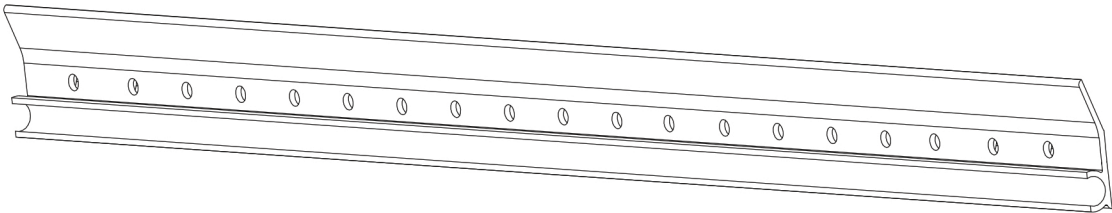

(1) TV Mounting Bracket

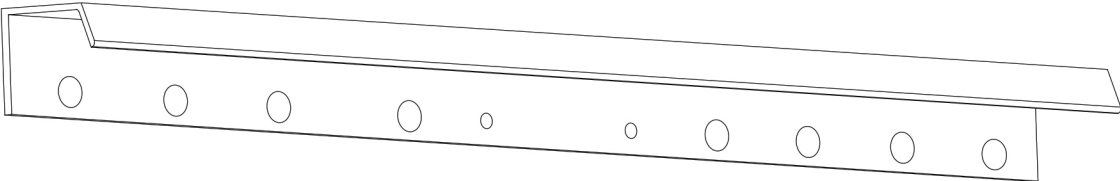

(1) Security Cable



(1) Magnetic Stud Finder



### Tools Required

- Pencil
- Power Drill
- Phillips Screwdriver
- 1/2" Drillbit


(1) Level




(6) Bolt Washers




(2) **M8** (8mm) x 35mm bolts



(2) **M6** (6mm) x 35mm bolts



(2) **M5** (5mm) x 35mm bolts



(2) **M4** (4mm) x 35mm bolts




(3) 1-1/2" Bear Claw Screw



**For Studs**

(3) Snap Toggle Anchors




**For Drywall / Lath & Plaster**


(2) Small Washers for 4mm bolts



(2) **M8** (8mm) x 20mm bolts



(2) **M6** (6mm) x 20mm bolts



(2) **M5** (5mm) x 12mm bolts



(2) **M4** (4mm) x 12mm bolts




(3) 1" Bear Claw Screws



**For Brick / Concrete**


(2) **M8** (8mm) x 16mm bolts



(2) **M6** (6mm) x 12mm bolts



(3) Alligator Anchors



(3) 2" Machine Screws



**CAUTION:** This S2060 mount is intended for use only with LED displays weighing up to 125lbs. Use with products heavier than 125lbs may result in collapse of the mount and its accessories causing possible injury.



*UL Rated for up to 125lbs. / 56.7kg*



**WARNING:** Before starting assembly, verify all parts are included and undamaged. If any parts are missing or damaged, do not return to your dealer; contact Customer Service. Never use damaged parts!



**WARNING:** CHOKING HAZARD — Small parts not for children under 3 years or any individuals who have a tendency to place inedible objects in their mouths.



685 Cochran St. #180-A  
Simi Valley, CA 93065



Customer Service  
Monday-Friday

818-610-0487  
7am-6pm PST

Se Habla Español



info@hangmanproducts.com



hangmanproducts.com

For Wood Stud & Metal Stud Installation.


STEP 1: INSTALL TV MOUNTING BRACKET

Place the TV face down on a soft surface where it is secure and stable. If your TV is already attached to a base, it must be removed before beginning the installation. The VESA holes on the back of the TV are either 4mm, 5mm, 6mm, 8mm depending on the brand of the TV. This kit includes all sizes.

Note: It is very important to select the correct bolt diameter and length.

Attach TV mounting bracket to the top 2 holes using the appropriate bolts. This kit also includes different lengths of each size. Hand tighten to choose appropriate length then use a handheld Phillips screwdriver and tighten until snug.

Do not overtighten.

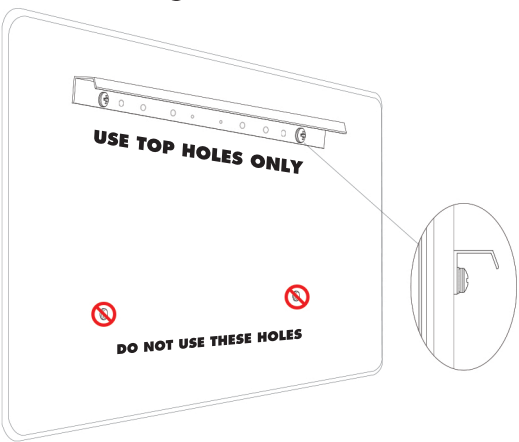

STEP 2: LOCATE STUDS

Locate studs by finding drywall screws and nails. Simply slide the included magnetic stud finder in an "S" shaped pattern until it locates a screw. Mark the stud location. The wall bracket must attach to 2 studs with the over lapping bracket secured on the end or ends using the Snap-Toggle anchor(s). See options A-B-C.



**FOR LATH & PLASTER:** Locate studs & use stud screws or Snap Toggles

**FOR BRICK & CONCRETE:** Use Alligator Anchors


IMPORTANT

TOO SHORT

TOO LONG

CORRECT

USE WASHERS IF BOLTS ARE TOO LONG

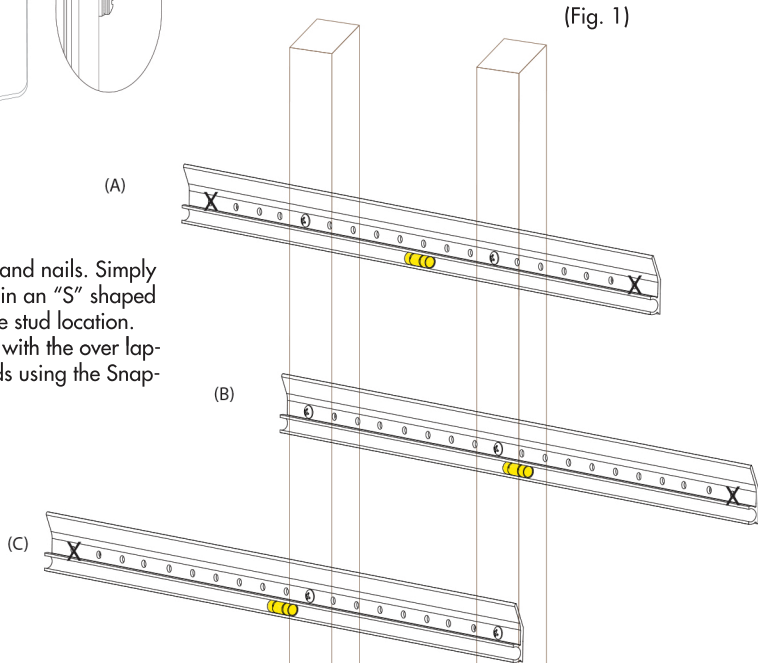

X= SnapToggle Anchor  
⊕= Stud Screw

STEP 3: LEVEL & MARK

Insert level into wall bracket. Place wall bracket over studs and mark end holes for the anchor(s). (one or two anchors- see Fig 1)

STEP 4: INSTALL ANCHORS



Drill 1/2" holes for the SnapToggle anchors and install either one or two anchors.

STEP 5: INSTALL WALL BRACKET

Install the wall bracket using black self drilling screws for the studs and silver machine screws for the anchors.

STEP 6: HANG YOUR TV

Hang TV by engaging the TV bracket on top of the wall bracket, assuring brackets have engaged correctly. (See below)

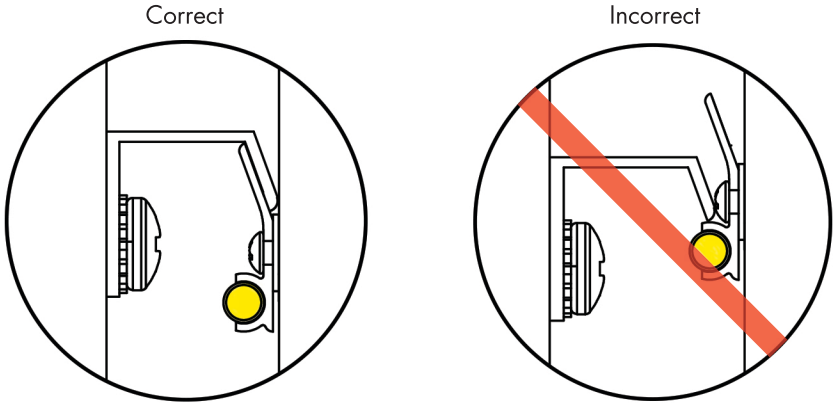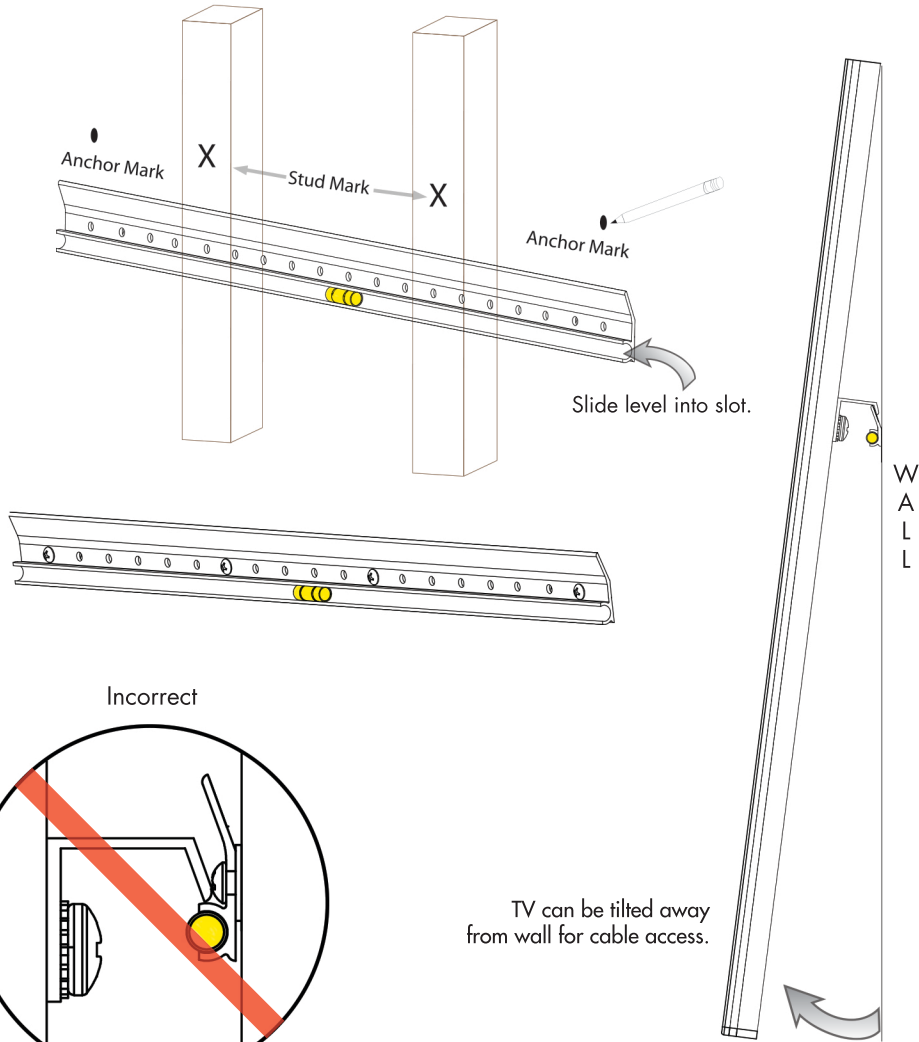

Security Cable Installation

Insert Cable through the slot on the bracket. Hang your television and insert BearClaw security screw through the eyelet and into the wall.

