

ELKAY[®] SPECIFICATIONS

Gourmet Sink with Perfect Drain™ Models STLR3322 Series

GENERAL

Highest quality sink seamlessly formed of #18 gauge, type 304 (18-8) nickel bearing stainless steel with **Perfect Drain**. Top Mount.

DESIGN FEATURES

Bowl Depths: See chart on next page.

Coved Corners: 1-3/4" vertical and horizontal radius.

Rim Height: 5/32" (4mm)

Finish: Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish.

Underside: Fully protected by Sound Guard[®] undercoating to reduce condensation and dampen sound.

Perfect Drain: Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation.

Each sink shipped with two LKPD1 drain kits, or a garbage disposer can be installed on either sink bowl for user convenience.

Patent Pending

OTHER

Drain opening: 3-3/8" (86mm)


Suffix "L" (left) or "R" (right) denotes location of deep bowl.

Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2


Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO[®] as meeting the applicable requirements of the Uniform Plumbing Code[®], International Plumbing Code[®], and National Plumbing Code of Canada.

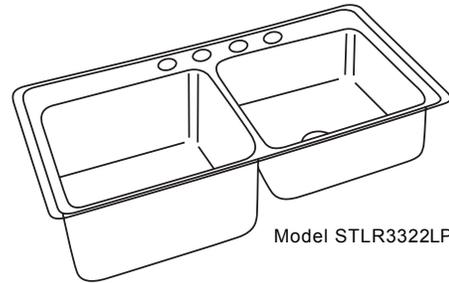

Model STLR3322LPD4

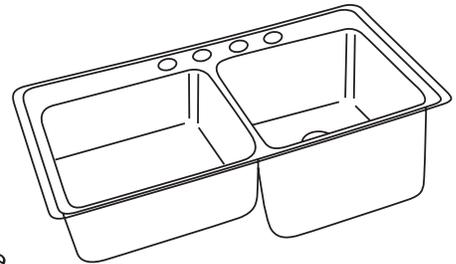

Model STLR3322RPD4



OPTIONAL ACCESSORIES

Bottom Grid: LKWBG1316SS

Cutting Board: CB1613, CB1713, CBR1316, CBS1316

Rinsing Basket: LKWBR1316SS, LKWBRBSS

Utensil Caddy for Rinsing Basket: LKWUCSS


in sink erator[®]

Elkay[®] Perfect Drain™ sinks are designed and approved for compatible disposers manufactured by InSinkErator[®] utilizing the Quick Lock[®] mounting configuration. Use of non-approved disposers may void Elkay warranty.

InSinkErator, Quick Lock and the mounting collar configuration are trademarks of Emerson Electric Co.



Installation Profile

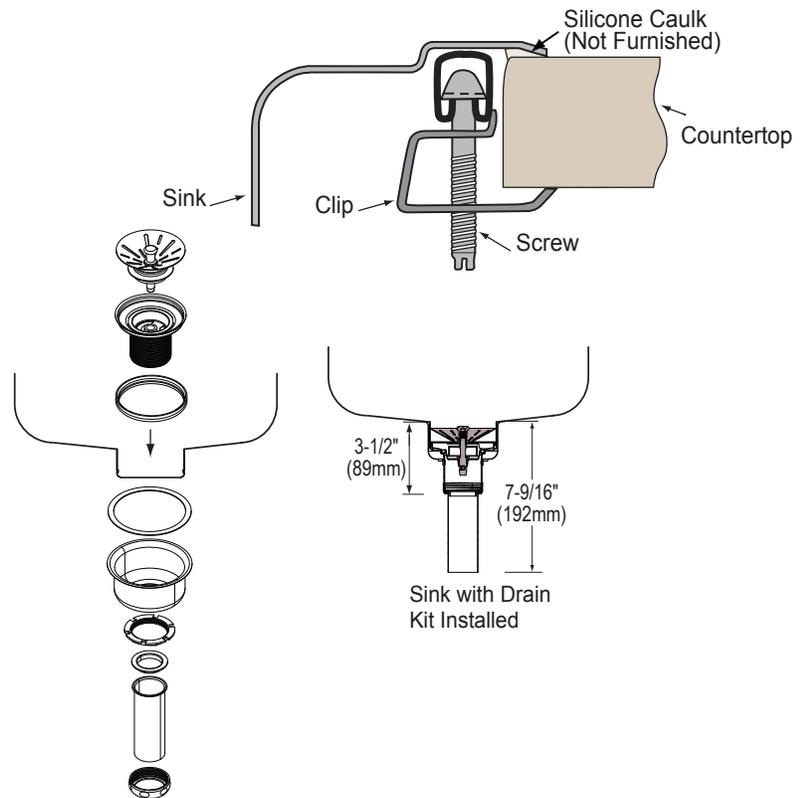

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.


ELKAY[®] SPECIFICATIONS

Gourmet Sink with Perfect Drain™ Models STLR3322 Series

SINK DIMENSIONS*


Model Number	Overall				Inside Left Bowl			Inside Right Bowl			Cutout in Countertop (1 1/2" [38mm] Radius Corners)		No. of 1 1/2" (38mm) Dia. Faucet Holes 4" (102mm) Center	Minimum Cabinet Size
	L	W	Left	Right	L	W	D	L	W	D	L	W		
STLR3322LPD	33 (838mm)	22 (559mm)	11-5/8 (295mm)	9-1/8 (232mm)	13-1/2 (343mm)	16 (406mm)	10-1/8 (257mm)	13-1/2 (343mm)	16 (406mm)	7-5/8 (194mm)	32 3/8 (822mm)	21 3/8 (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)
STLR3322RPD	33 (838mm)	22 (559mm)	9-1/8 (232mm)	11-5/8 (295mm)	13-1/2 (343mm)	16 (406mm)	7-5/8 (194mm)	13-1/2 (343mm)	16 (406mm)	10-1/8 (257mm)	32 3/8 (822mm)	21 3/8 (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)

*Length is left to right. Width is front to back.

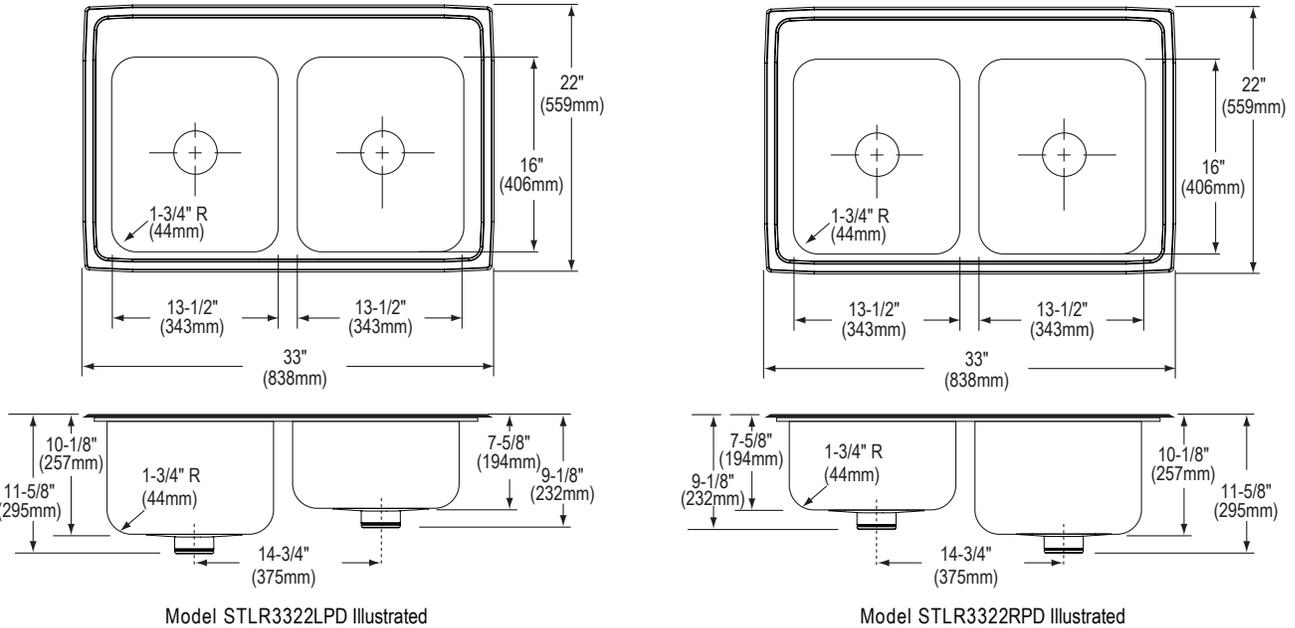

Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

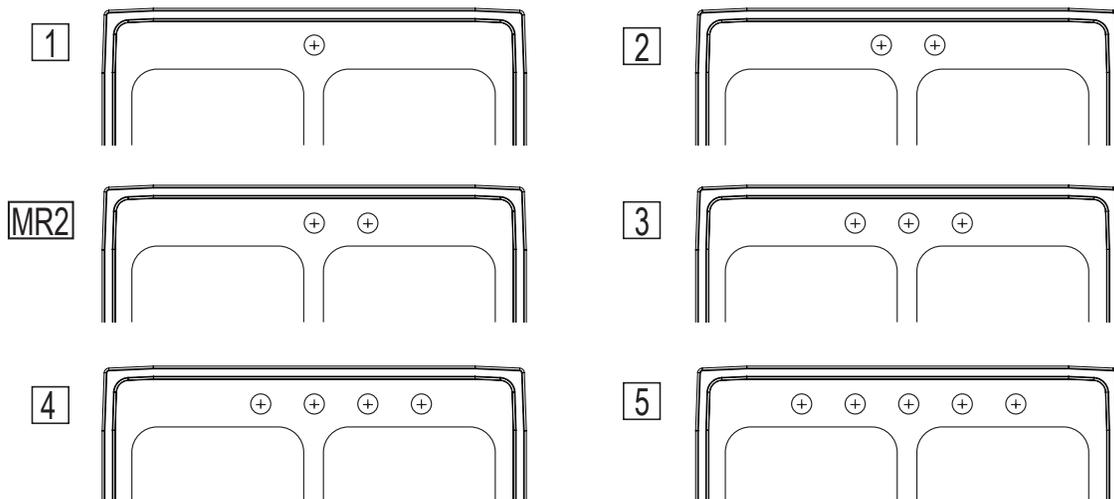

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.