


**NL-680**  
**Fully Adjustable Elbow**

Type
Project
Catalog No.
Lamp/Wattage

**TRIM DIMENSIONS**

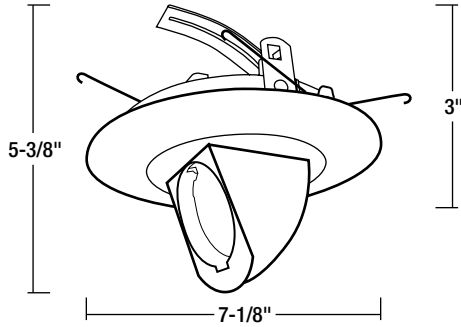

Trim OD: 7-1/8"  
 Height: 3"  
 Maximum Extension: 5-3/8"

**FEATURES**

- Trim**  
 Metal trim with fully adjustable elbow can be adjusted up 358° horizontally and 70° vertically. Adjustable elbow allows lamp to be front loaded into trim.
- Mounting**  
 Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).
- Compatible Housings**  
 Compatible with Low Voltage housings and Low Voltage retrofit kits. See individual specification sheets for more information.

- Lamp**
- Low Voltage**  
 20W-50W 12V MR16 (NLIC-601 Series; NL-601 Series; NLR-604 Series)  
 20W-75W 12V MR16 (NL-601/75 Series; NLR-604/75 Series)
- Low Voltage Retrofit Kits**  
 20W-50W 12V MR16 (NLK-2600; NLK-2600EL)

**Labels and Listings**  
 cULus Listed for Damp Location when used with compatible housing.

**Fully Adjustable Elbow**

- NL-680B:** Black Fully Adjustable Elbow
- NL-680BZ:** Bronze Fully Adjustable Elbow
- NL-680C:** Chrome Fully Adjustable Elbow
- NL-680CO:** Copper Fully Adjustable Elbow
- NL-680G:** Gold Fully Adjustable Elbow
- NL-680N:** Natural Metal Fully Adjustable Elbow
- NL-680W:** White Fully Adjustable Elbow

**Compatible Housings**

LOW VOLTAGE		
Item Number	Installation Type	Dimensions
NL-601Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277/75Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NLIC-601QAT	IC Air-Tight New Construction - 120V Mag.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/1EL	IC Air-Tight New Construction - 120V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/2EL	IC Air-Tight New Construction - 277V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLR-604Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277/75Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
LOW VOLTAGE RETROFIT KITS		
NLK-2600	Non-IC - 120V Magnetic	W: 4-1/2" L: 4-3/4" H: 5-1/8"
NLK-2600EL	Non-IC - 120V Electronic	W: 5-1/8" L: 5-1/2" H: 4-1/2"