


Assembly Instructions: 1323-M1L WG (Ella)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase to arrange for replacement parts.

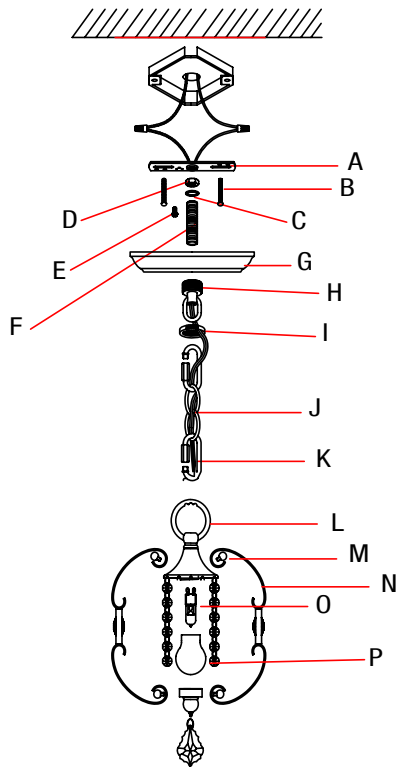

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

From the parts bag remove the mounting strap assembly. One end of nipple (F) should be attached to mounting strap (A) with hex nuts (C, D) in place. The other end should have canopy loop (H) attached.

Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely. Unscrew canopy loop collar (I) from canopy loop (H). Pass canopy (G) over the mounted canopy loop to test the height. Approximately half of the canopy loop's exterior threads should be exposed, and the canopy loop collar should fit snugly onto the canopy loop. Remove canopy (G) and adjust the height of nipple (F) and canopy loop (H) until the desired height is reached.

ASSEMBLING THE FIXTURE

Use decorative nuts (M) to attach the arms to the fixture body. Refer to the crystal installation sheet to hang the crystals.

CLEANING TIPS


Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

HANGING THE FIXTURE

By measuring, determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach one chain connector (K) to each end of chain (J). Use one of chain connectors (K) to attach chain (J) to top loop (L) and close the chain connector. Feed the fixture wires up through the chain (every three links or so), pulling the wires until taut. Slide canopy loop collar (H) and canopy (G) onto the chain/wire. Use the free chain connector (K) to attach chain (J) to canopy loop (H).

CONNECTING THE WIRES

Have an assistant support the fixture weight while completing the wiring. Cut away excess wire. Thread the fixture wires through canopy loop (H) and nipple (F). Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (A) and wrap the fixture ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

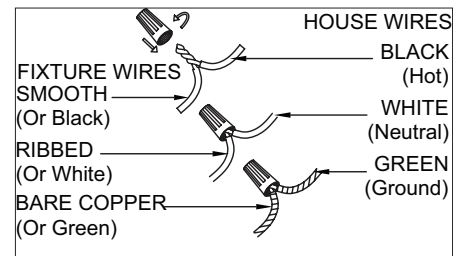

FINISHING THE INSTALLATION

Push canopy (G) up to the ceiling and slide canopy loop collar (I) up beneath the canopy. Tightly thread canopy loop collar (I) onto canopy loop (H) to secure canopy (G) in place.


Install bulb (O) in accordance with the fixture's specifications. See the bulb note below. Gently screw bulbshield (P) around the socket. Do not overtighten.

Bulb Note: Use a tissue or paper towel to hold the bulb and push down into the socket. Oils and dirt can cause the bulb life to shorten. Rubbing alcohol is recommended for cleaning.

Your installation is now complete. Turn on the power and test the fixture.


1323 Crystal Instructions

A - crystal drop




AA is a double sided crystal,
50mm
Part: PT-CRYSTAL-1323-AA


AS is a single sided crystal,
50mm
Part: PT-CRYSTAL-1323-AS




A1



A2

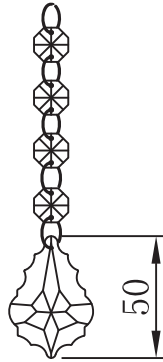


A4

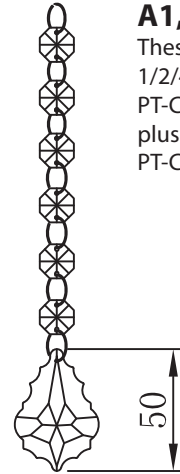

A6


A1, A2, A3, and A4
These crystal drops use
1/2/4/6 pieces of
PT-CRYSTAL-1323-D14
plus 1 piece of
PT-CRYSTAL-1323-AS

B - crystal drop




BB is a double sided crystal,
76mm
Part: PT-CRYSTAL-1323-BB

BS is a single sided crystal,
76mm
Part: PT-CRYSTAL-1323-BS



BB1


BB1 uses 1 piece of
PT-CRYSTAL-1323-D14 plus
1 piece of PT-CRYSTAL-
1323-BS




B2

B2 uses 2 pieces of
PT-CRYSTAL-1323-D14
plus 1 piece of
PT-CRYSTAL-1323-BS

C - crystal drop




CC is a double sided crystal,
89mm
Part: PT-CRYSTAL-1323-CC

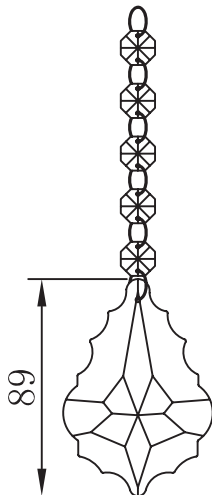

CC5

CC5 uses 5 pieces of part
PT-CRYSTAL-1323-D14 plus
1 piece of PT-CRYSTAL-
1323-CC

D - crystal drop



D5/D6 uses 5/6 pieces of
replacement part
PT-CRYSTAL-1323-D12