# direct-to-stud

### **FEATURES**

- 36" x 36" Shower Walls for new and existing construction.
- Thick 1/4" 100% solid surface material bonded to an 1-1/4" thick aluminum honeycomb polyeurethane filled backer for superior strength. Solid surface material is easy to clean and will not support bacteria growth.
- 3-piece wall design glues directly to studs with supplied adhesive. Back wall can be alternately installed with aluminum hanging rail provided.
- Aluminum channel joints for easy installation and uniform structure.
- Four wall shelves included for convenient storage
- Wall Kit includes 8" long chrome shower arm, 15" slotted hanging rail, four 11-oz. tubes quick dry panel adhesive and two 11-oz. tubes 100% silicone adhesive.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

### **COLORS**

• 4 Transitions colors with a 16" x 16" square tile pattern.

### **OPTIONS**

- Dome Top slides in place and sits on top of the shower walls forming a complete 8' shower enclosure. The dome contains (1) waterproof UL approved 12 volt LED light (40 year life).
- Matching shower base with concealed drain.
- Corner or Rectangular Shower Seats also available. See Accessories Specification sheet for details.

## **Specified Model**

	SIZE	MODEL NO.	DESCRIPTION	Width	Depth	Height			
COMPLETE SHOWER KITS									
	36" x 36"	DKWF3668	Walls & Base Kit	36"	36"	83"			
	36" x 36"	DKWFT3668	Walls, Base, Dome Kit	36"	36"	95¾"			
SHOWER WALLS (only) KIT									
	36" x 36"	DKW3668	Wall Kit	36"	36"	80"			
	36" x 80"	DB3668	Back Wall (1 pc.)	36"		80"			
	36" x 80"	DE368	End Wall Set (2 pcs.)		36"	80"			
INDIVIDUAL COMPONENTS									
	36" x 36"	F3636	Shower Base	36"	36"	3"			
	36" x 36"	T3661	Dome Top	36"	36"	12¾"			

To Be Specified: Color (see below)

16" Square Tile Pattern / Colors




**Compliance Certifications - Meets or Exceeds the Following Specifications** 

- IGC 154-2012
- ASME A112.18.1-2011 / CSA B125.1-11
- cUPC®



Shown with F3636 Shower Base, T3661 Dome Top

## **Dome Top**

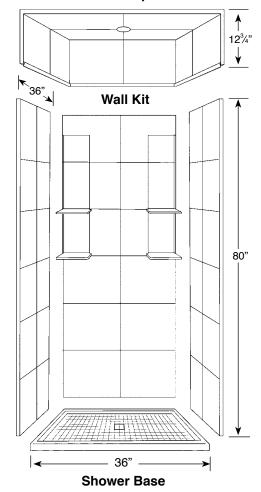


## direct-to-stud

#### **INSTALLATION NOTES**

This product is to be installed according to the installation guide.

Drain cutout in subfloor to be 4-1/2" diameter and located per the rough-in Illustration 1. Dry fit the shower base to ensure a proper fit and correct alignment of the shower drain and the hole in the floor.

Unit can be installed with aluminum hanging rail provided. Alternate adhesive method of installation can be used without the use of the hanging rail (see full instructions for details). Position of hanging rail mounting is also critical. See Illustration 2 for horizontal positioning of hanging rail. The top of the hanging rail to be positioned at 76" above finished floor when using a 3" high Transolid shower base. When you do not use a Transolid shower base the upper hanging rail should be installed 73" above the finished threshold.

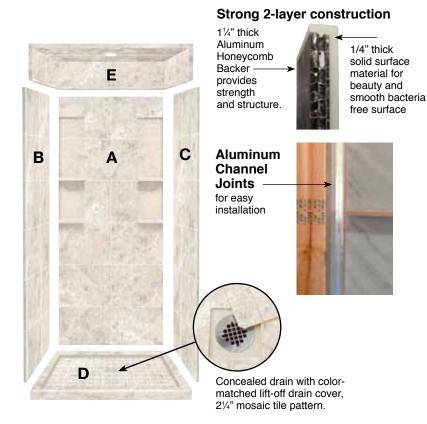


	MODEL NO.	DESCRIPTION	
Α	DB368 Back Wall (1 panel)		
В	DE368L Left End Wall (1 panel)		
С	DE368R Right End Wall (1 panel)		
D	F3636 Shower Base - center drain		
Е	T3661	T3661 Dome Top with (1) LED Light	


## **Product Information**

	SHOWER DOOR		
MODEL NO.	MAXIMUM WIDTH	MAXIMUM HEIGHT	
DKW3668	33"	80"	

## Illustration 1





## Illustration 2

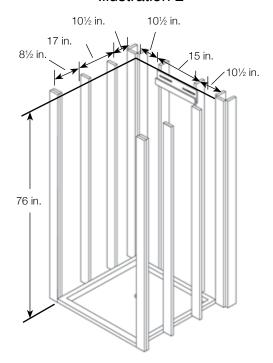

### **OPTIONS: ACCESSORIES**

Available for on-site installation. Must be ordered separately. See Accessories Specification for further information.





Corner Shower Seat CSS1414

Rectangular Shower Seat RSS2412