

# ASSEMBLY INSTRUCTIONS

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.


**WARNING:** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.


**NOTE:** CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL. DUE TO THE FRAGILITY OF CRYSTAL, HANDLE WITH SPECIAL CARE DURING MOVING AND INSTALLATION, AVOIDING ANY IMPACT OR COLLISION.

1. Carefully remove all parts from the box.
2. Remove the protective film from the canopy (E) and fixture frame (J) before installation
3. Remove the mounting plate (B) from the canopy (E) by unscrewing the cap nuts (H).
4. Install the mounting plate (B) to the junction box and secure with the mounting screws (D).
5. Connect the safety cables as shown in diagram.
6. Wrap the fixture ground wire to the green ground screw on the mounting plate (B) and secure, then connect to the ground wire in the junction box using the wire nut (A).
- IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.**
7. Connect the fixture white wire to the neutral wire in the junction box using the wire nut (A).
8. Connect the fixture black wire to the hot wire in the junction box using the wire nut (A).
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
9. Install the canopy (E) to the mounting plate (B) and secure with the cap nuts (H).
10. Adjust the lengths of the four suspension cables by pressing the adjuster (F) and adjust the length of one power cable by turning the adjustment screw (G) to bring the circular fixture frame (J) to the appropriate height while maintaining a balanced state.
- NOTE: ADJUST THE FIRST LAYER FIRST, THEN ADJUST THE SECOND LAYER, PAYING ATTENTION TO THE SPACING BETWEEN THE TWO LAYERS.**
11. Install 4 metal rods (K) to the fixture frame (J) and secure with screws (K1)
12. Install the circular frame (M) to the metal rods (K) and secure with screws (K2)
13. Install the second layer in the same manner.
14. Hang the crystal (L) on the fixture frame (M)
15. Hang the crystal (I) on the fixture frame (J)


\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

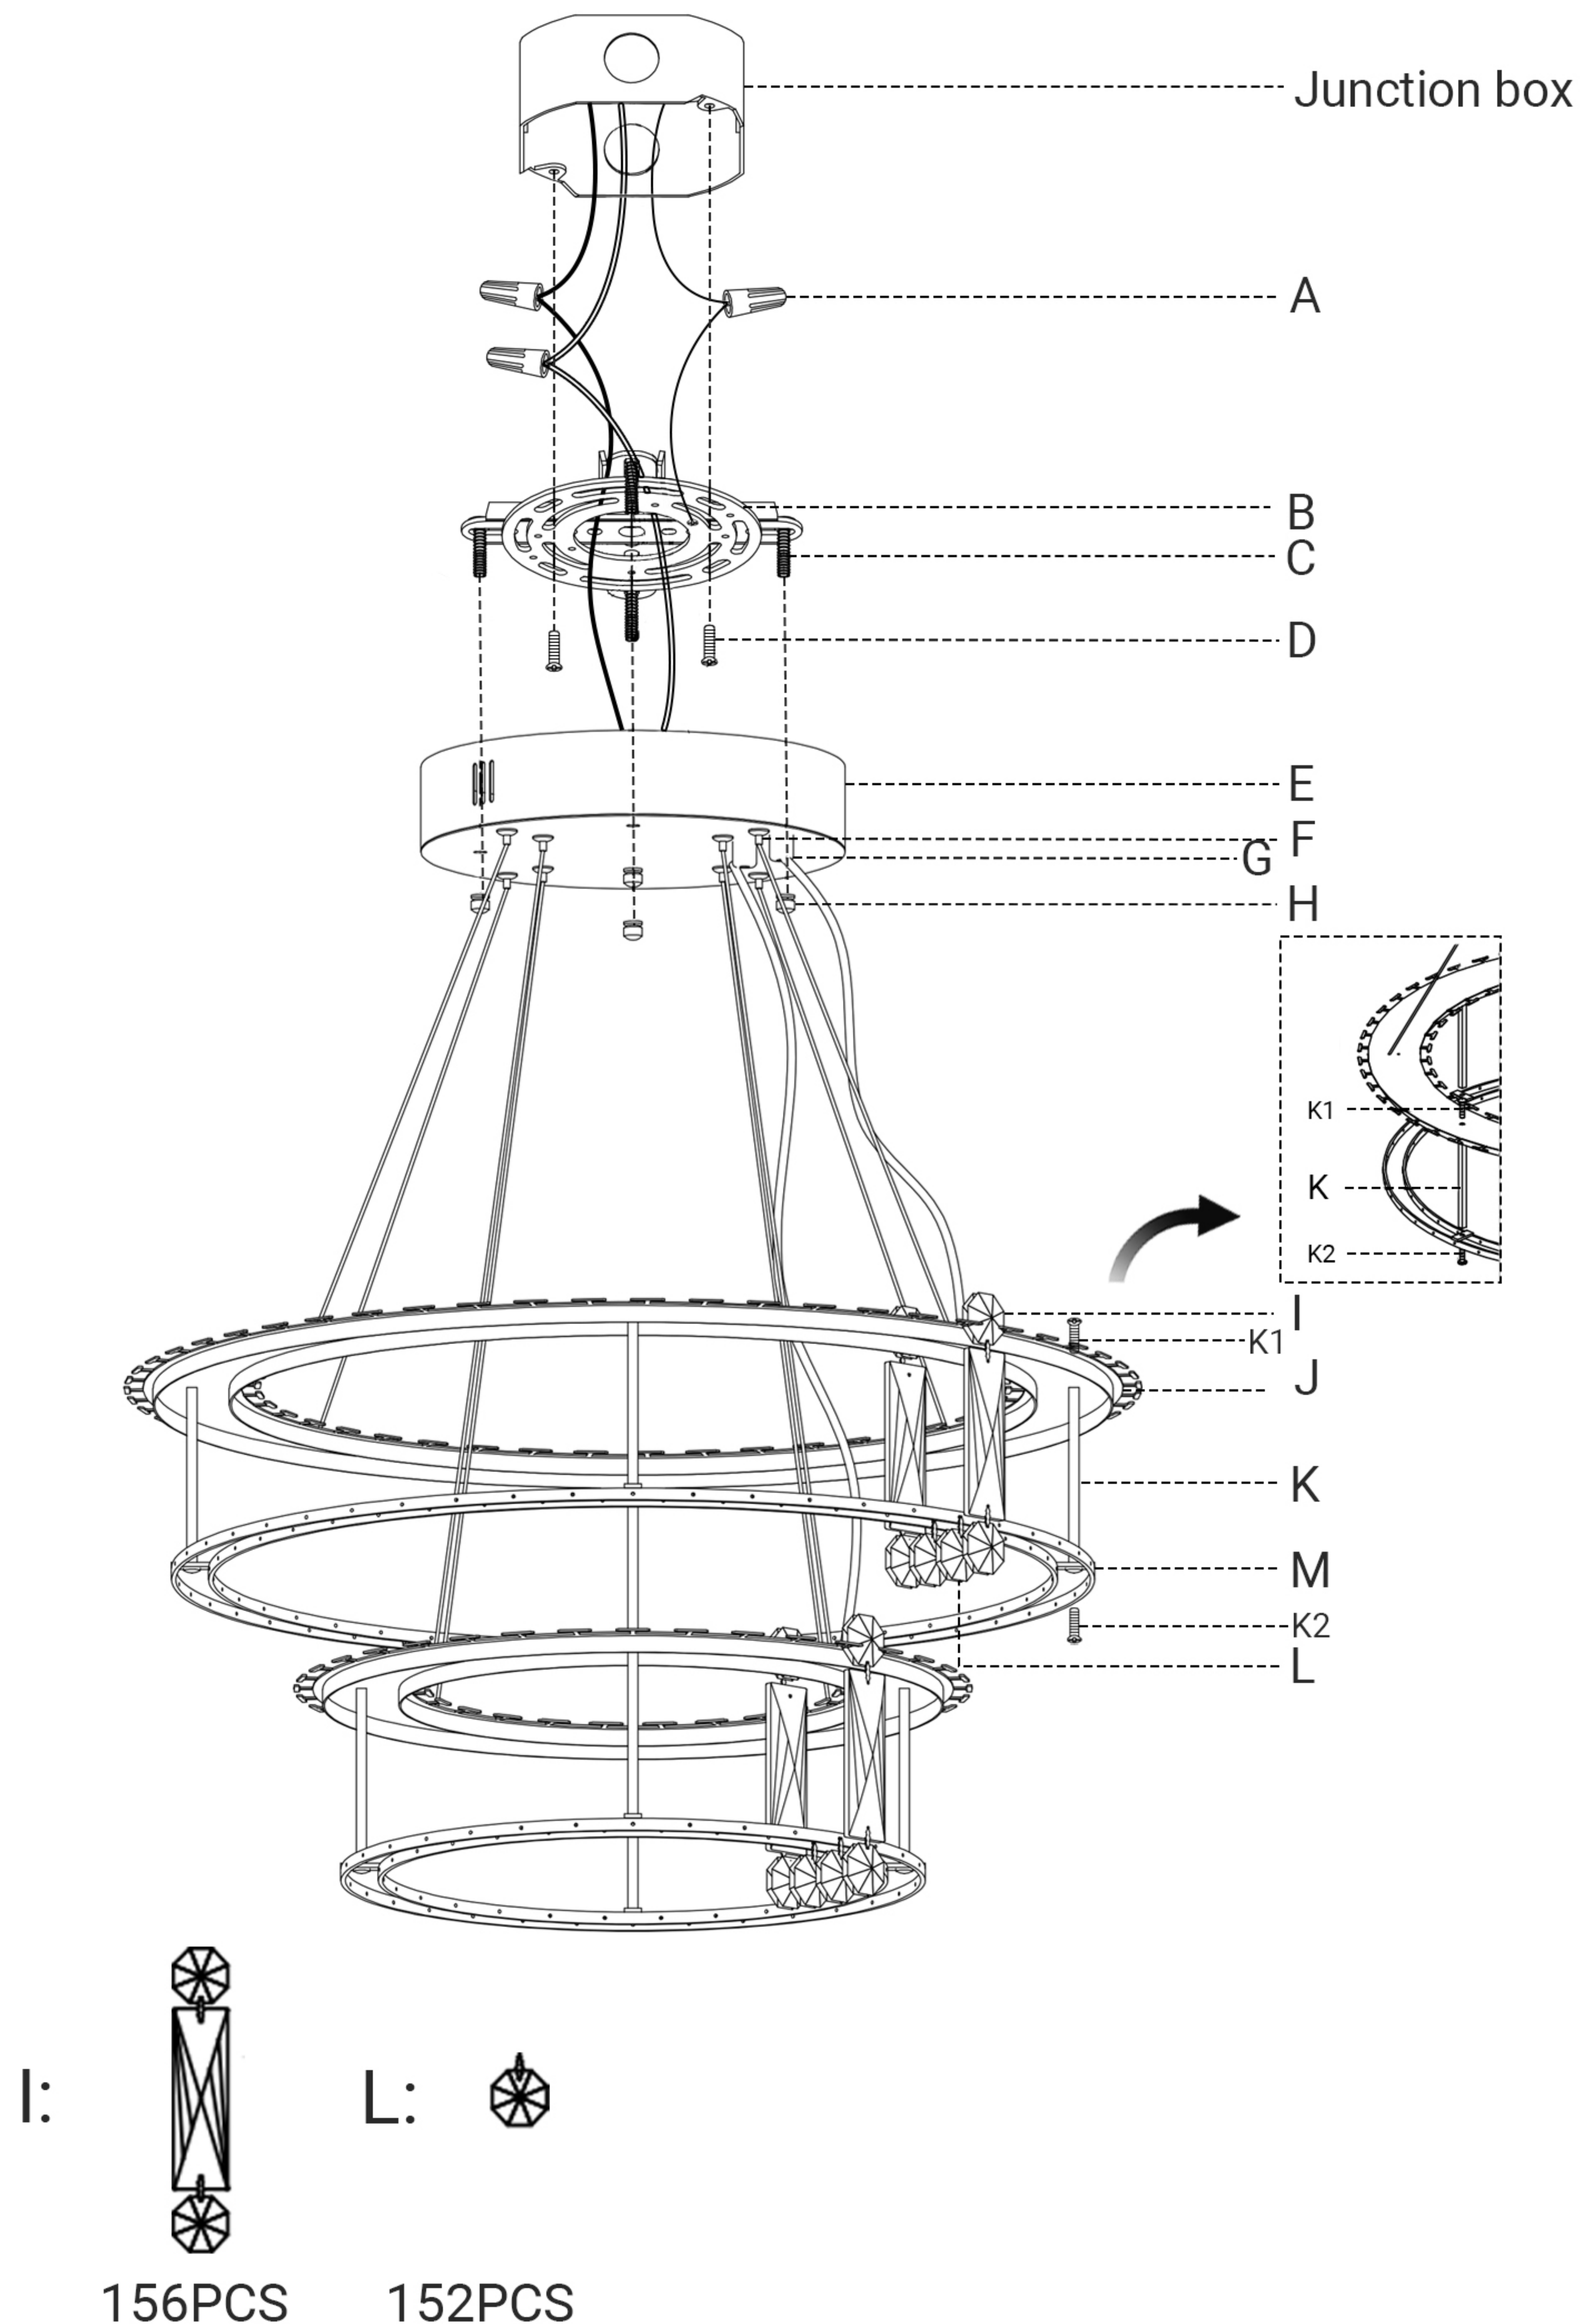



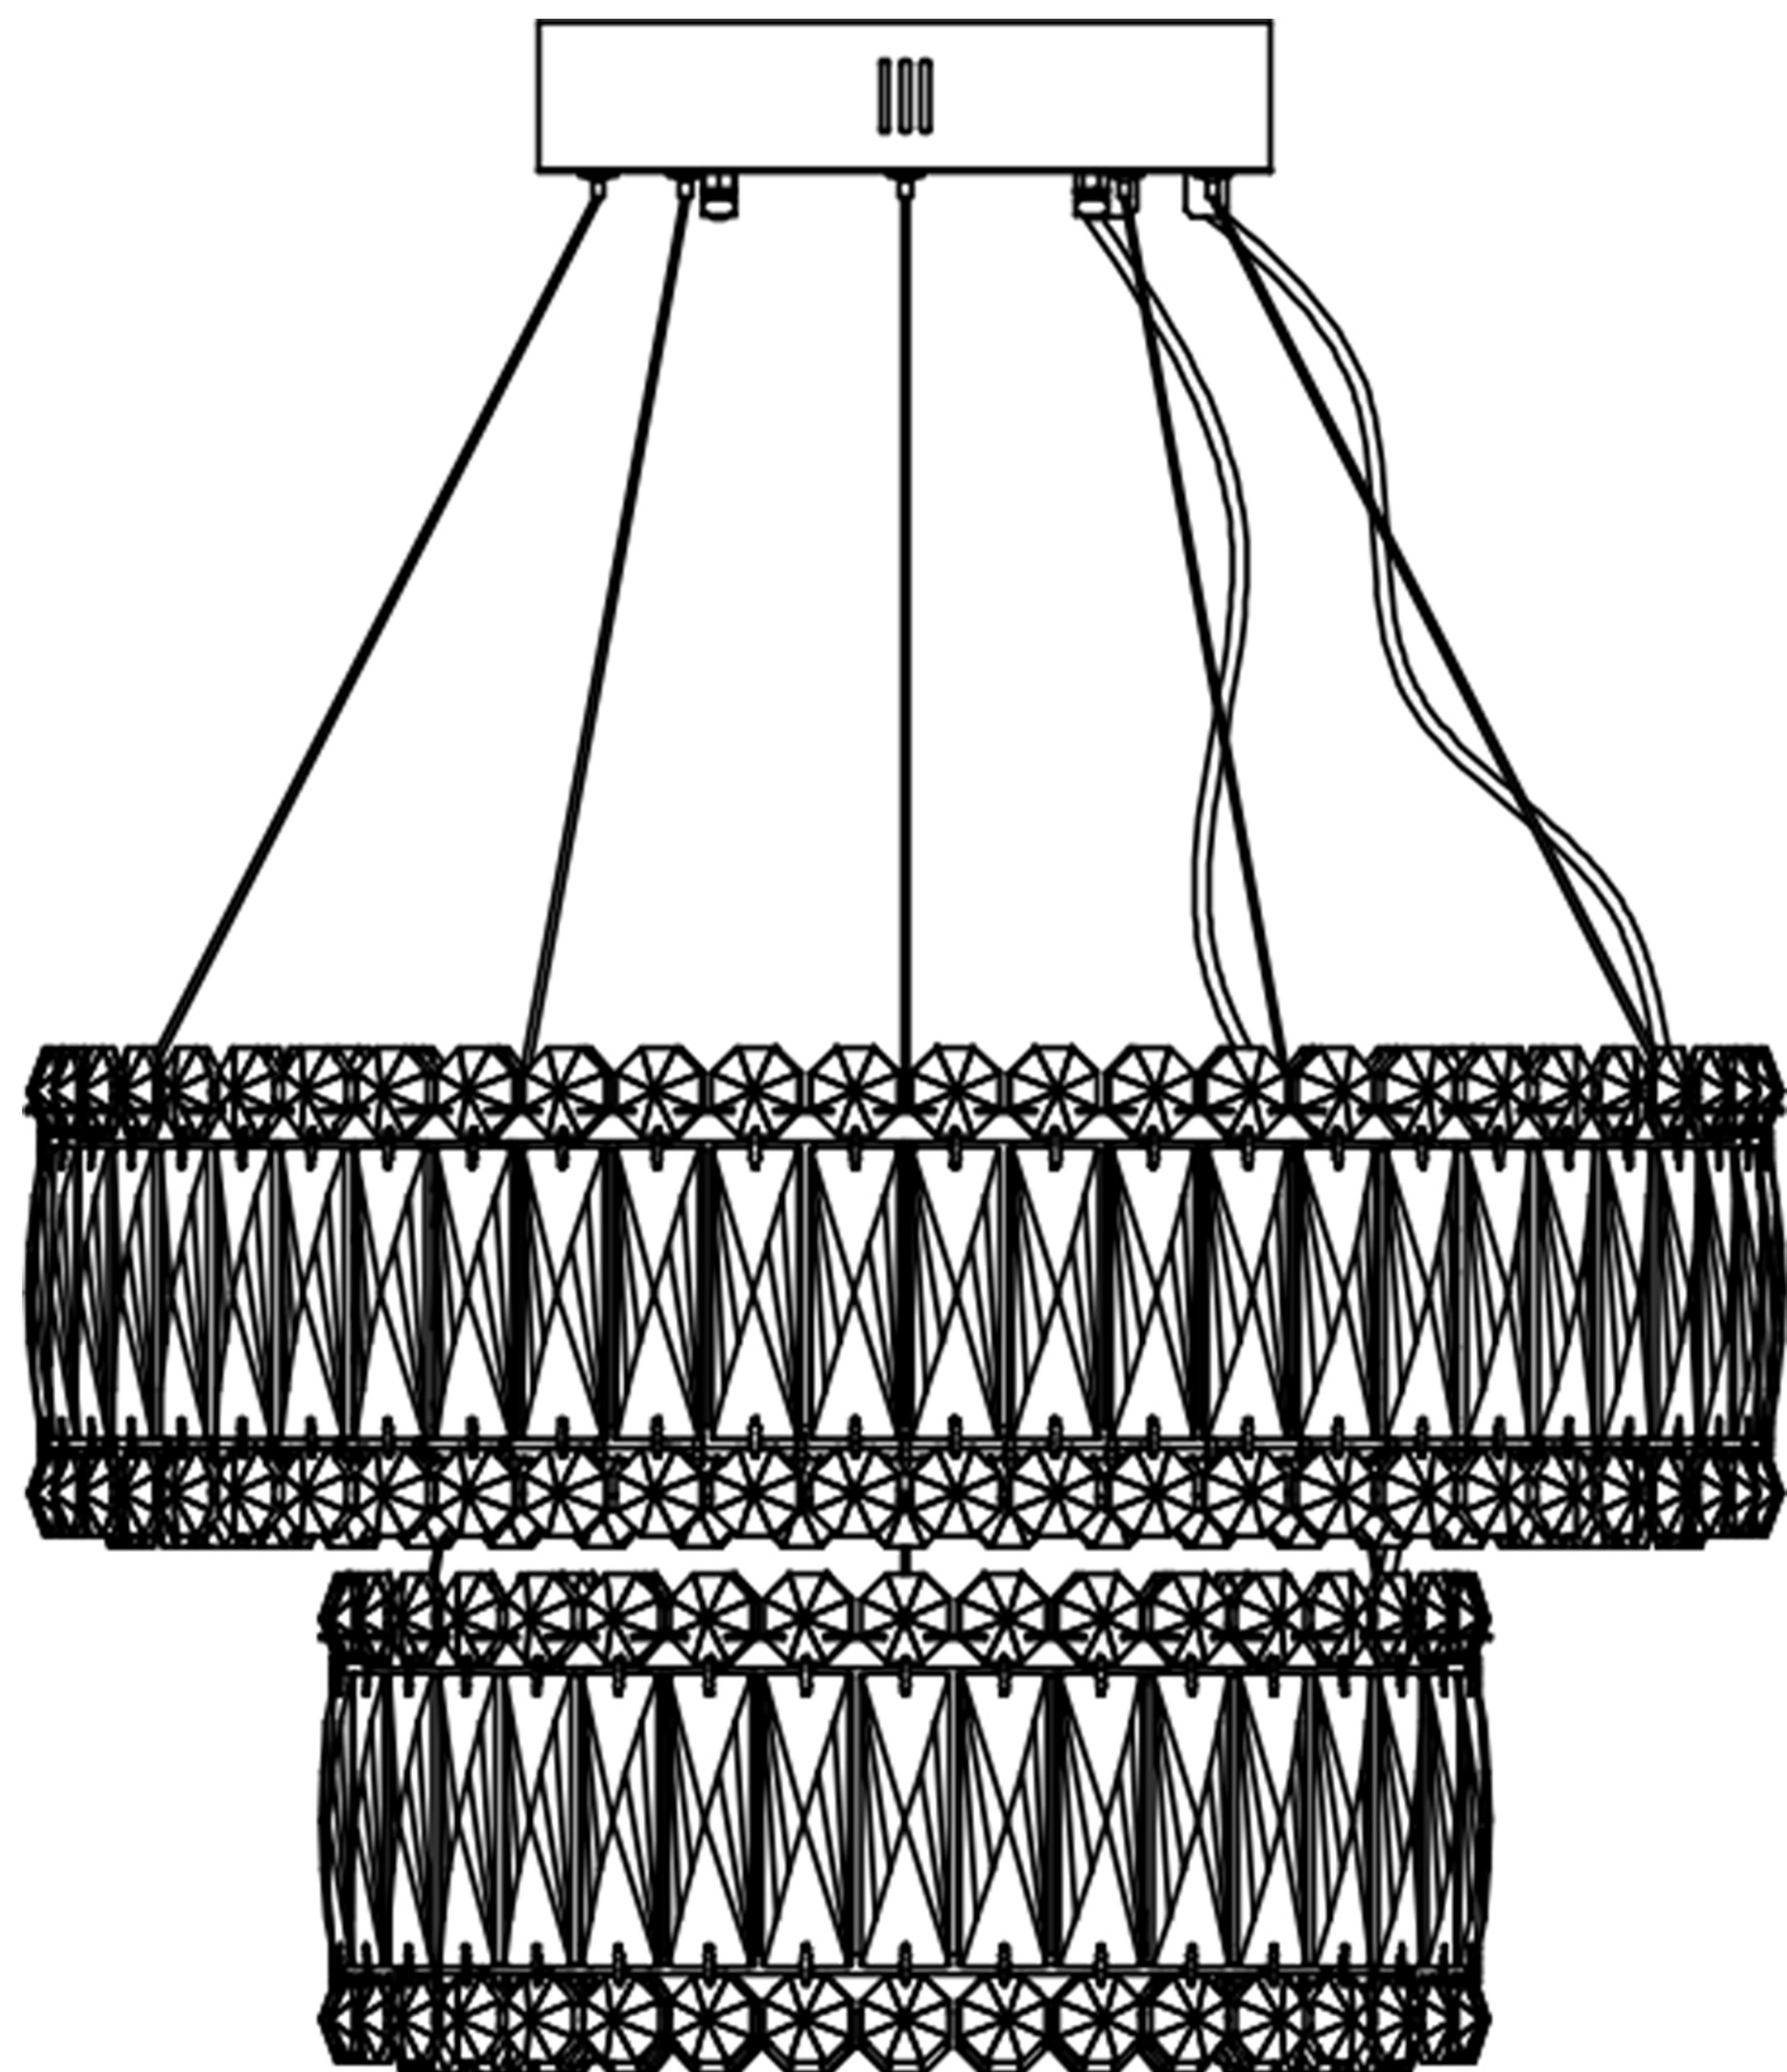

# Remote Control Functions Guideline

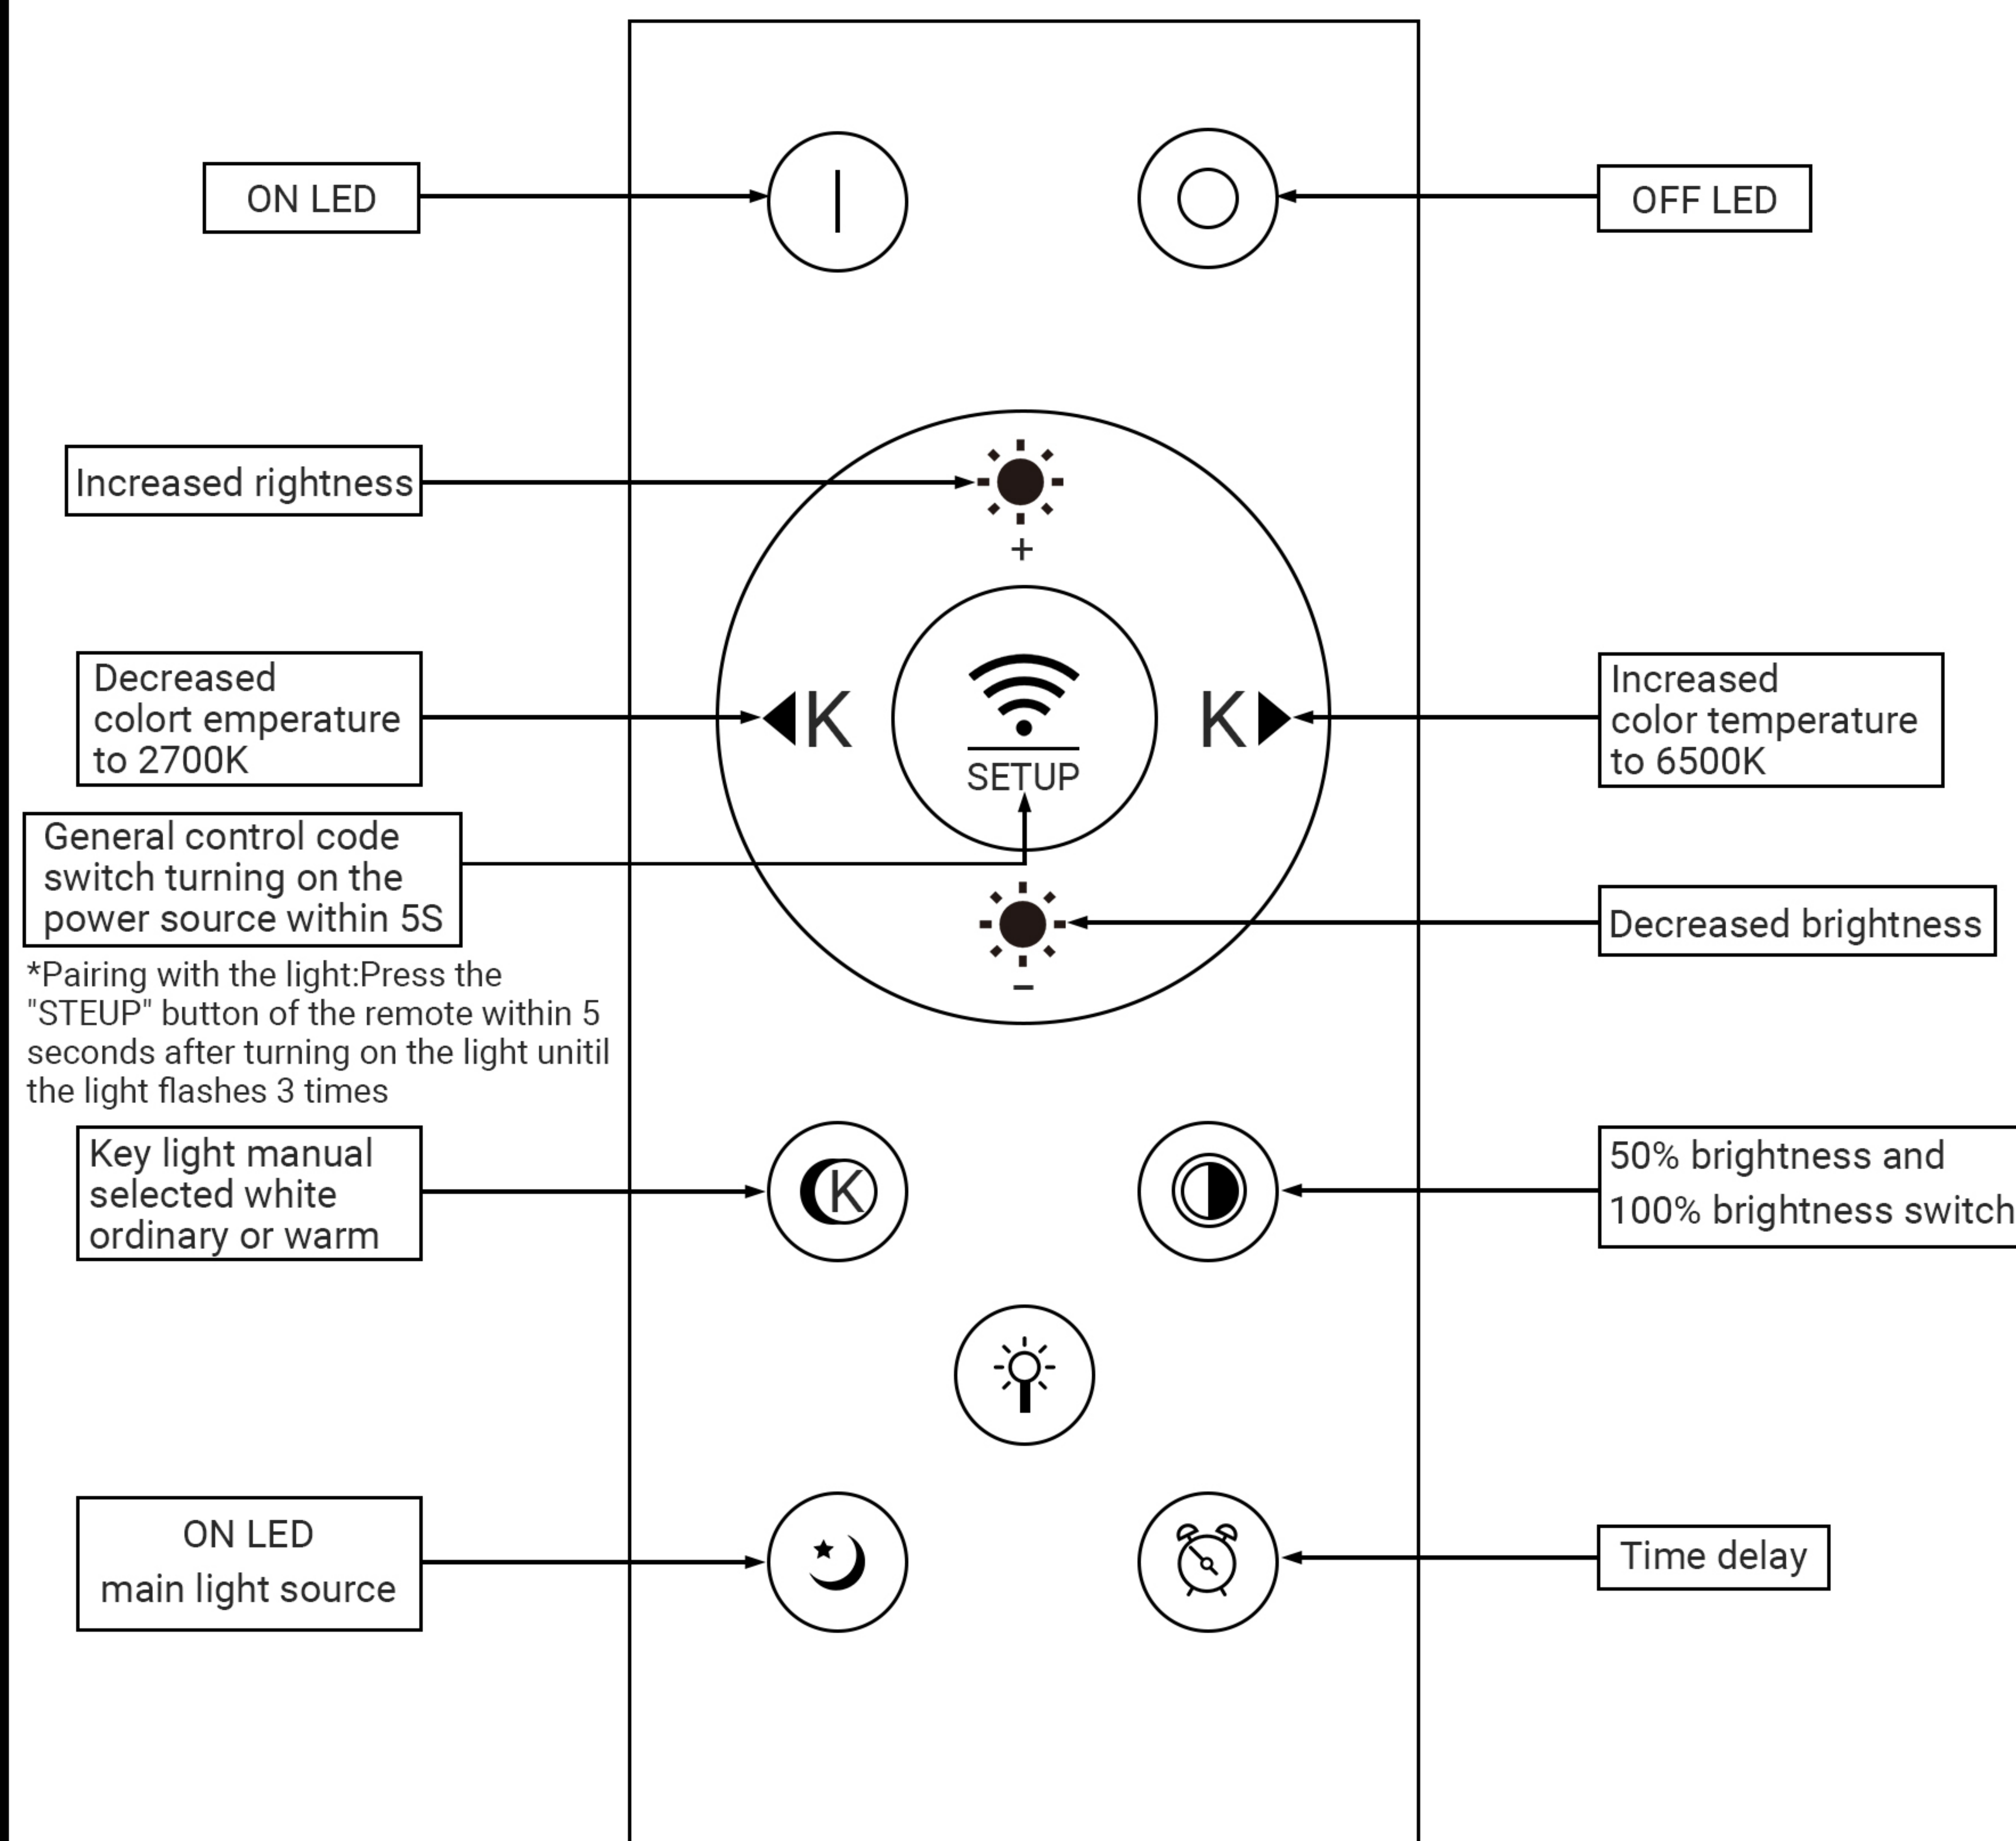

**Memory Function:** After adjusting the desired color temperature and brightness, please wait at least 30s before turning off the lights to ensure that the driver has remembered your settings. The next time you turn on the lights, you won't have to reset them again.