


Features

- Acrylic
- Pump with air switch and grounding-type plug-in cord
- 6 individually adjustable ProFlex® hydro-massage jets
- Integral apron with removable access panel
- In-line heater
- Molded lumbar supports and armrests
- Textured bottom surface
- Optional K-9696 whirlpool trim kit in various finishes
- Integral tile flange on both sides for corner installation.
- 60" (1524 mm) x 60" (1524 mm) x 21" (533 mm)

BATH WHIRLPOOL WITH INTEGRAL APRON AND HEATER K-1160-HL

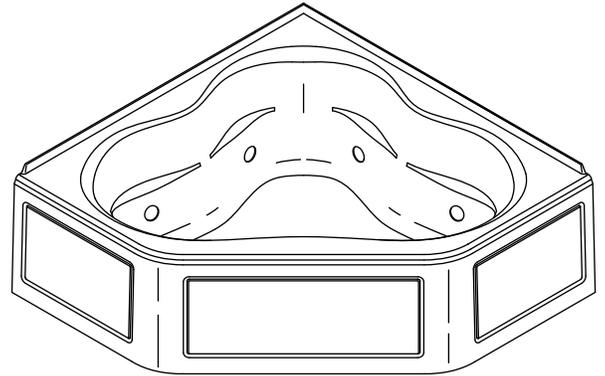

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- CSA B45.5/IAPMO Z124

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes			
K-1160-HL	Bath whirlpool with integral apron and heater (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____		
Recommended Accessories					
K-11677	Adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB		
Optional Accessories					
K-1491	Pillow	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-9696	Jet trim kit (metal finishes)		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 60" (1524 mm) in width, and 21" (533 mm) in height. Product shall have 6 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall have integral apron with removable panel for front access and integral tile flange on both sides for corner installation. Product shall have a textured bottom surface and molded lumbar supports and armrests. Product shall have optional K-9696 whirlpool trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1160-HL-_____.

TERCET®

Technical Information

Fixture*:	
Basin area:	
Bathing well	52" (1321 mm) x 38-3/4" (984 mm)
Top area	61" (1549 mm) x 46-1/4" (1175 mm)
Weight	151 lbs (68.5 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	96 gal (363.6 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:	kW	V	Hz	A
	1.5	120	60	12.5


Required Electrical Service

Two dedicated circuit required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets onto the wooden stud provided, as illustrated below.	

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 39 lbs/square foot (188 kg/square meter) loading.

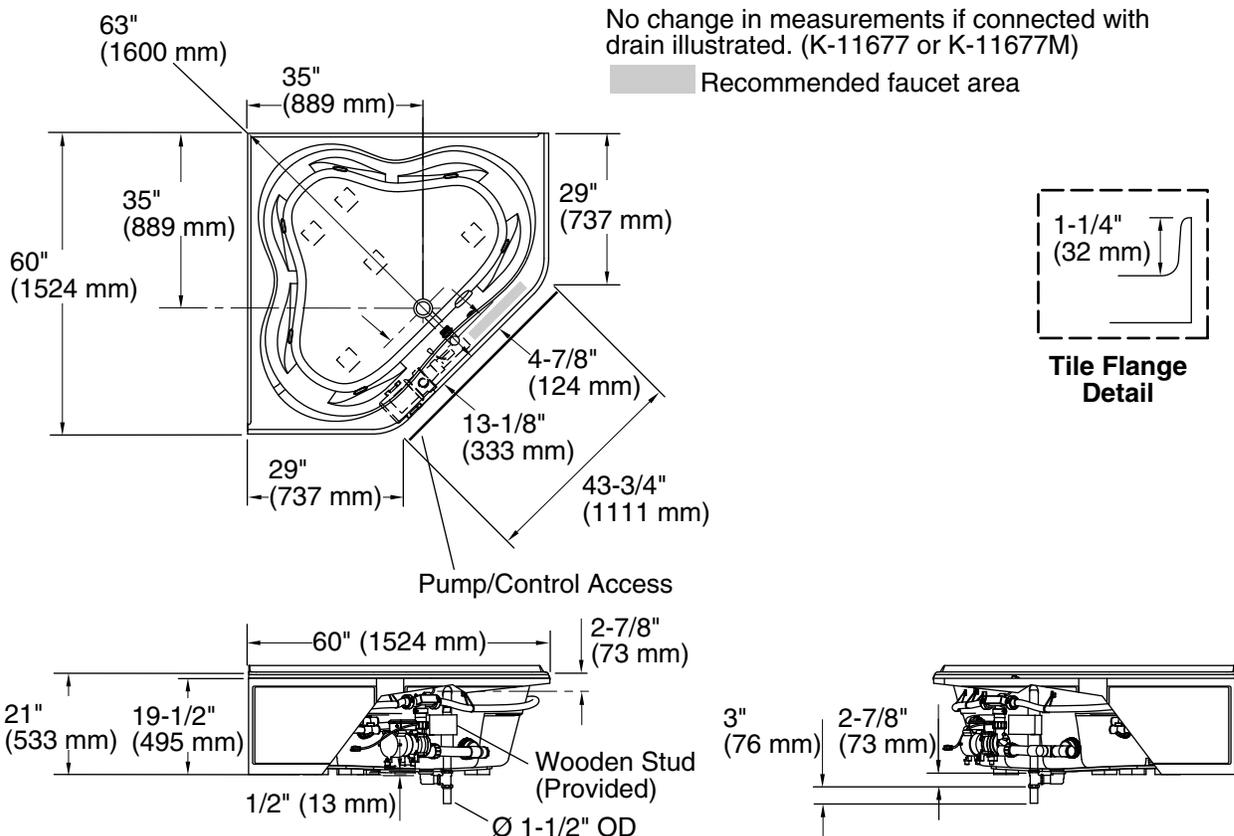

Product Diagram