

ADA

CSA B651

OBC


Features

- KOHLER cast iron
- Without overflow
- Available as above-the-counter, self-rimming, or wall-bracket installation
- ADA compliant when distance from rim to floor is 34" (86.4 cm) [self-rimming only]
- Optional wall-mount bracket [K-9655]
- 18" (45.7 cm) x 16" (40.6 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.1/CSA B45.2

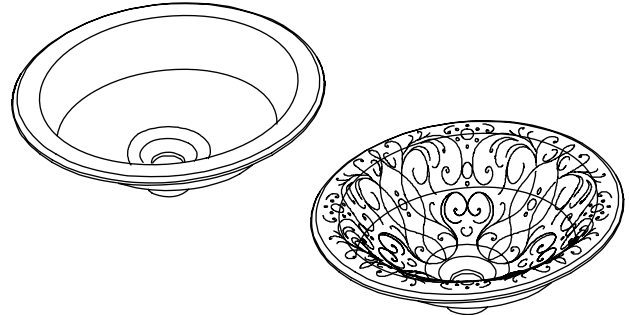

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-2804	Lavatory – self-rimming	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-2804-P5	Glazed underside – above-the-counter or wall-mount bracket	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-14225	Iron Etchings™ design – above-the-counter or self-rimming	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Recommended Accessories			
K-9018	P-Trap	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
Optional Accessories			
K-9655	Vessels wall-mount bracket – for use with K-2804-P5 or K-14225	<input type="checkbox"/> NA	

Product Specification

The lavatory shall be made of cast iron. Lavatory shall be 18" (45.7 cm) in width and 16" (40.6 cm) in length. Lavatory shall be without overflow. Lavatory shall be available as above-the-counter, self-rimming, or wall-bracket installation. Lavatory shall be ADA compliant when distance from rim to floor is 34" (86.4 cm) [self-rimming only]. Lavatory shall have optional wall-mount bracket [K-9655] available. Lavatory shall be without overflow. Kohler Model K-____-____ or K-____-____-____

IRON BELL®

Technical Information

Fixture*:	
Basin area	13" (33 cm) x 12" (30.5 cm)
Water depth	4-3/8" (11.1 cm)
Drain hole	1-3/4" (4.4 cm) D.
*Approximate measurements for comparison only.	
Included components:	
Cut-out template	115887-7

Installation Notes

Install this product according to the installation guide.

Product does not have overflow.


Spout must be a minimum of 5" (12.7 cm) long for adequate clearance into the lavatory when installed with the centerline as shown.

Spout must be tall enough to clear the 3" (7.6 cm) rim height and provide a 1" (2.5 cm) air gap per ASME A112.1.2.

Will comply with **ADA** when installed per Section 606 Lavatories of the Act.

Will comply with **CSA B651** when installed per Clause 4.3.3 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.11.

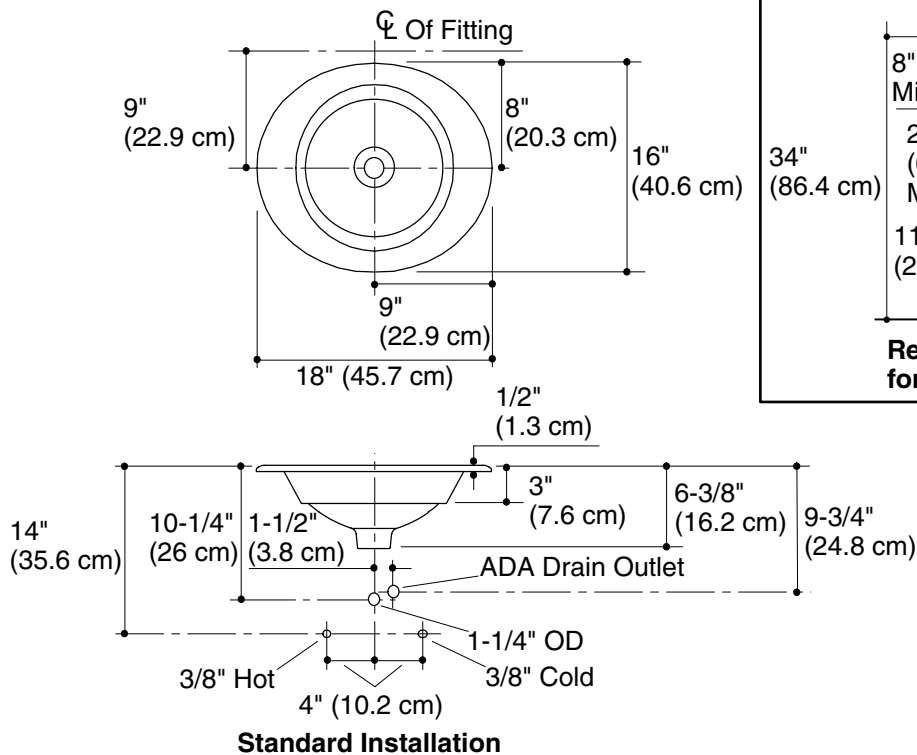

Product Diagram