

Features

- Integral flange.
- Comfort Depth[®] design offers a 19" (483 mm) step-over height.
- Right drain.
- Slotted overflow for deep soaking.
- Integral lumbar support and armrests for comfort.
- Integral apron.
- Textured bottom surface.
- Coordinates with other products in the Archer® collection.
- 60" (1524 mm) x 32" (813 mm) x 19" (483 mm)

Material

Acrylic

Installation

Alcove

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain



Archer®



ADA

Codes/Standards CSA B45.5/IAPMO Z124 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

KOHLER[®] Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


- O White
- 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
-) 33 Mexican Sand™
- K4 Cashmere
 - 58 Thunder™ Grey
- 7 Black Black™





Archer®

5' Bath **K-1123-RA**

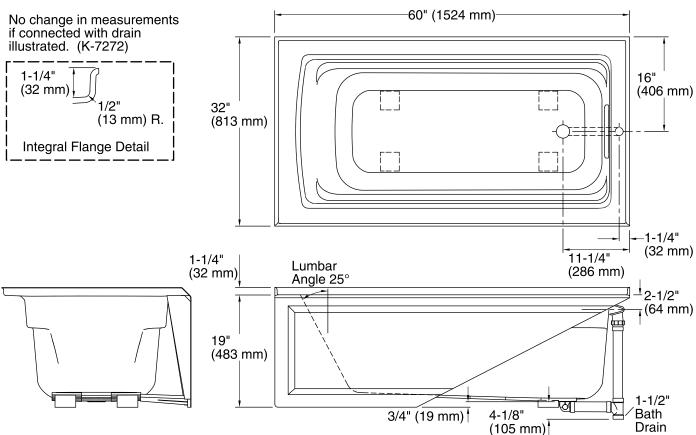

Technical Information

| All product dimensions are nominal. | |
|---|--|
| Installation: | 3-Wall Alcove |
| Drain location: | Right |
| Basin area, bottom: | 45-1/8" x 19-11/16" (1146 mm x 500 mm) |
| Basin area, top: | 52-3/4" x 25-5/16" (1340 mm x 643 mm) |
| Weight: | 80 lbs (36.3 kg) |
| Minimum floor load: | 45 lbs/ft² (219.7 kg/m²) |
| Water depth: | 15" (381 mm) |
| Water capacity: | 58 gal (219.6 L) |
| Minimum flat for door: | 2-3/16" (56 mm) |
| Basin area, top: Weight: Minimum floor load: Water depth: Water capacity: | 52-3/4" x 25-5/16" (1340 mm x 643 mm) 80 lbs (36.3 kg) 45 lbs/ft ² (219.7 kg/m ²) 15" (381 mm) 58 gal (219.6 L) |

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

