

through doorways with ease. Durable high gloss finish.

Acrylic towel bar included on back wall.

# Performa™

## 60" Bath/Shower w/Backer Boards 71040126







# Wall surround includes backer boards for future attachment of grab bars. 60" (1524 mm) x 29" (737 mm) x 75-1/2" (1918 mm) complete

Modular design allows it to be moved around corners and

# unit finished dimensions.

#### Material

**Features** 

Compression molded from our exclusive solid Vikrell® material.

#### Installation

- Tongue-and-groove four-piece modular design allows for easy snap together installation.
- Caulk is required in the seams for proper installation.

#### **Recommended Accessories**

500C-59 Framed Sliding Bath Door 690B-59 Framed Sliding Bath Door 5325EZ-57 Frameless Sliding Bath Door 5405-59 Frameless Sliding Bath Door 5900-57 Framed Sliding Bath Door 5900-59 Framed Sliding Bath Door 5905-57 Framed Sliding Bath Door 5905-59 Framed Sliding Bath Door 5906-59 Framed Sliding Bath Door 5907-59 Framed Sliding Bath Door 542808-59 Frameless Sliding Bath Door 572005-59 Framed Sliding Bath Door 581005-59 Frameless Sliding Bath Door 80001012 12" Grab Bar 80001018 18" Grab Bar 80001024 24" Grab Bar 80011032 32" Grab Bar 80001036 36" Grab Bar VA-80172 Window Trim Kit

#### Components

Product includes:

71044106 60" Bath/Shower Wall Set w/Backer Boards 71041120 60" Bath



#### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold HUD, UM Bulletin 73

### STERLING® Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

#### **Available Color/Finishes**


Color tiles intended for reference only.

Color	Code	Description	
	0	White	
	96	KOHLER Biscuit	



# Performa™

# 60" Bath/Shower w/Backer Boards 71040126

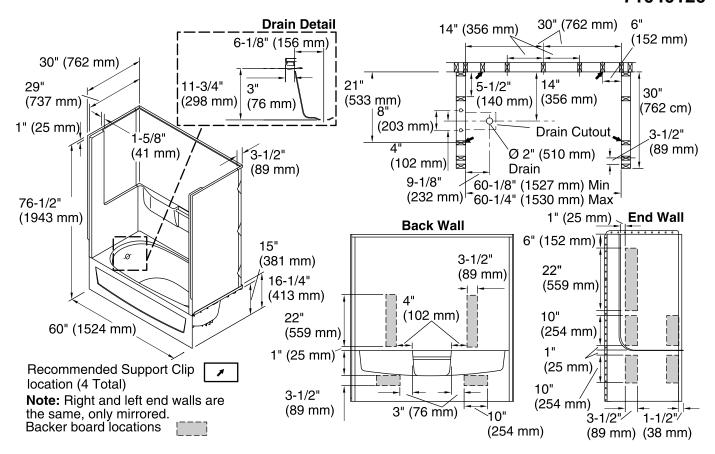

#### **Technical Information**

All product dimensions are nominal.

Installation:

3-Wall Alcove

Drain location: Right

Basin area, bottom: 21" x 39" (533 mm x 991 mm)
Basin area, top: 24" x 53" (610 mm x 1346 mm)

Water depth: 10-1/4" (260 mm)
Water capacity: 35 gal (132.5 L)
Minimum flat for door: 1-3/4" (44 mm)
Door height required: 59-1/2" (1511 mm)
Door width required: 56-3/4" (1441 mm)

#### **Notes**

Install this product according to the installation instructions.

Studs should be positioned as shown.

Double studding is recommended for pivot shower door installations.

Attach grab bars at the specified backer board locations only.