

Features


- Compression molded from our exclusive solid Vikrell® material
- Gentle sloping back, neck, and armrest in bath design
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Integral apron with removable access panel
- 16" (40.6 cm) bath depth (floor to top of dam)
- 3" (7.6 cm) wainscot/tile ledge
- 60" (152.4 cm) x 43-1/2" (110.5 cm) x 20" (50.8 cm) rough-in dimensions include flanges
- 60" (152.4 cm) x 42" (106.7 cm) x 19" (48.3 cm) finished dimensions

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124

42" (106.7 cm) OVAL BATH WITH
ACCESS PANEL
71111117
ALSO 71111127

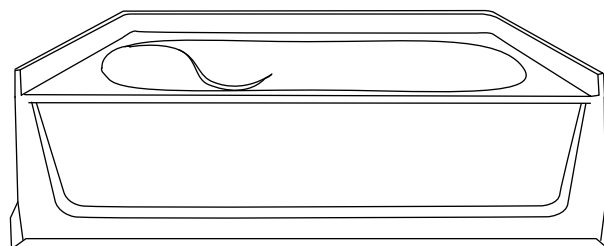

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
71111117	42" (106.7 cm) oval bath with access panel, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71111127	42" (106.7 cm) oval bath with access panel, right drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

ENSEMBLE™

Technical Information

Fixture*:	
Bathing well	40" (101.6 cm) x 27" (68.6 cm)
Top area	52" (132.1 cm) x 35" (88.9 cm)
To overflow:	
Water depth	11" (27.9 cm)
Capacity	55 gal (208.2 L)
* Approximate measurements for comparison only.	

Model	door maximum width	door maximum height
71111117	58-1/2" (148.6 cm)	NA*
71111127		
* Varies with alternative walls.		


Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

Stud positioning is critical.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

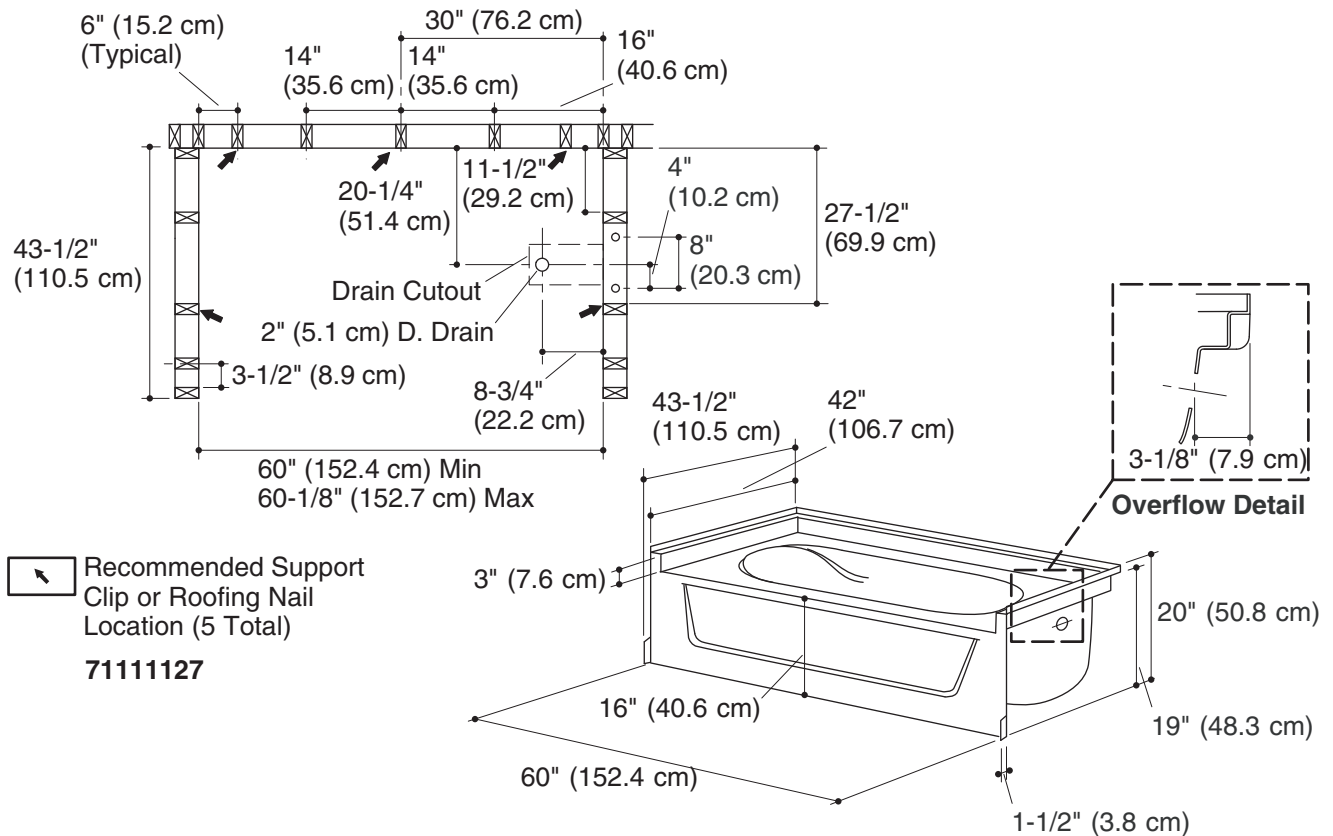

Product Diagram

ENSEMBLE™ 42" (106.7 cm) OVAL BATH WITH ACCESS PANEL

Page 2 of 2
1090634-4-B

STERLING
A KOHLER COMPANY