
# Fan/Fixture Box with Adjustable Bracket

more on reverse

## *HIGHER Weight Ratings • For Retrofit*





Finished FBRS4200R installation

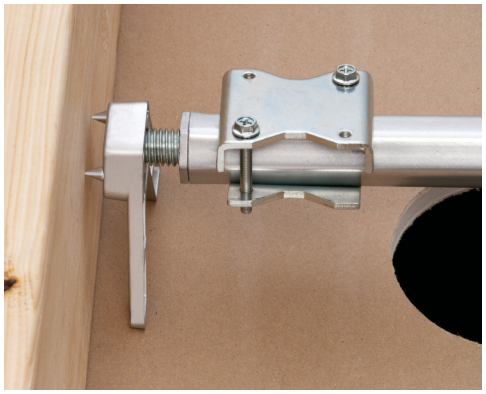

Bracket ends bite into wood



FBRS4200R holds a 70 lb fan

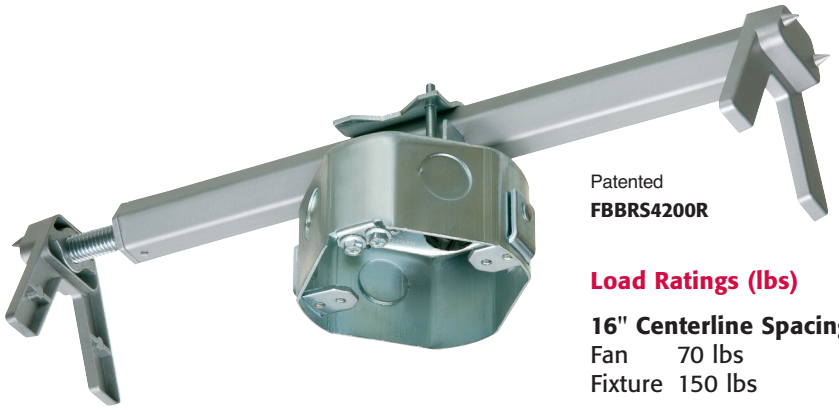

Patented
**FBBRS4200R**

**Load Ratings (lbs)**

**16" Centerline Spacing**
Fan 70 lbs
Fixture 150 lbs

**24" Centerline Spacing**
Fan 70 lbs
Fixture 70 lbs

Arlington's extra heavy-duty, **plated steel fan/fixture box** now has higher UL weight ratings:

**150 lbs for fixtures, 70 lbs for fans** when installed on joists spaced 16" on center;
**70 lbs for fans, 70 lbs for a fixture** on joists spaced 24" on-center.
CSA rated for 50 lb fan or fixture.

Our FBRS4200R features a fully adjustable bracket for installations between joists or rafters spaced from 16" to 24" on center. Bracket ends bite into the wood rafter or joist, holding the fan or fixture securely in place.

- Fast, easy installation in old work and retrofit projects
- 20.0 cubic inch capacity, 2 inch box depth
- No parts to lose – Installation screws ship captive, with an installed mud cover and NM cable connector
- UL/CSA Listed

**Arlington®**

1 Stauffer Industrial Park
Scranton, PA 18517
**800/233.4717 • Fax 570/562.0646**
**www.aifittings.com**


# Fan/Fixture Box with Adjustable Bracket

## *Installs between rafters spaced 16" to 24" on center*

**Easy, secure fan or fixture installation in retrofit projects**




1 Determine location of fan/fixture. Cut a 4-1/16" diameter hole in ceiling. Remove box (only) from the bracket. Loosen screws on sled to enable centering above hole (see step 5). Insert bracket through the opening.

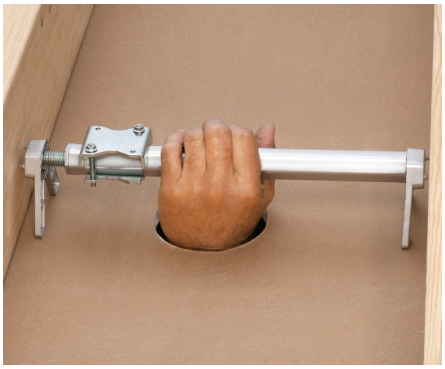


2 Position bracket between joists with "feet" resting on the ceiling. Embed bracket ends in joists by turning the hex bar by hand...




3 ...then tightening with a wrench.

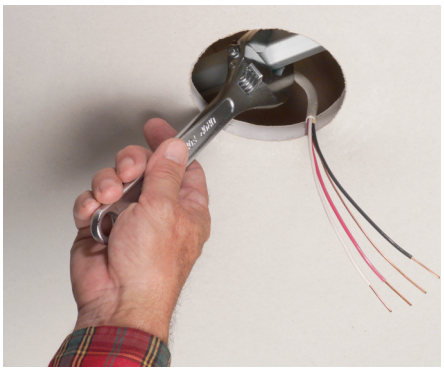


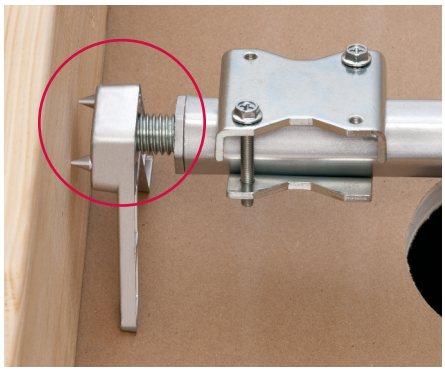

4 As the hex bar is tightened, the bracket ends bite into the joists, holding the unit securely in place.

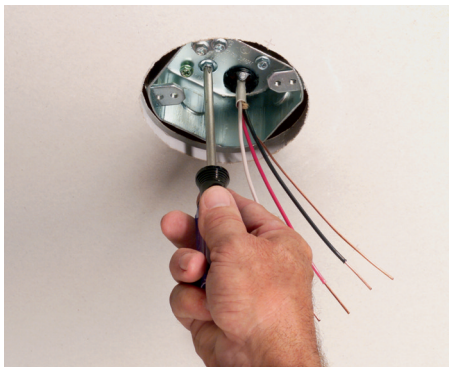

5 Position sled. Tighten screws. Pull cable through installed NM cable connector. Reattach the box to the sled. Attach the fan/fixture bracket with supplied screws.

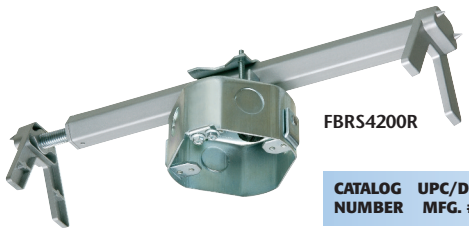

FBRS4200R

| CATALOG NUMBER | UPC/DCI/NAED MFG. #018997 | DESCRIPTION FAN BOX FOR RETROFIT | UNIT PKG | STD PKG |
|---|---|---|---|---|
| FBRS4200R | 75315 | Heavy-duty, plated steel fan/fixture box w/ fully adjustable bracket | 1 | 10 |

**LOAD RATINGS (LBS)**

| RAFTER/JOIST Centerline Spacing | FAN | FIXTURE |
|---|---|---|
| 16" | 70 LBS | 150 LBS |
| 24" | 70 LBS | 70 LBS |

Patented


**Arlington®**

1 Stauffer Industrial Park
Scranton, PA 18517
**800/233.4717 • Fax**
**570/562.0646**
**www.aifittings.com**


Distributed by

©2010 / REV 2022 Arlington Industries, Inc.

FBRS4200R Rev 0122/25M