

# **FLUENCE**®

#### **Features**

- CleanCoat™ glass coating
- Center-guided door panel mechanism for smooth, quiet sliding action and easy cleaning
- Out-of-plumb adjustability allows for easy installation
- Stainless steel hardware prevents rusting or corrosion
- Smooth, easy-to-clean wall jambs
- · Gently curved inside and outside towel bar
- 3/8" (1 cm) thick tempered glass

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)
- CFR 1201

BYPASS BATH/SHOWER DOORS K-702205
ALSO K-702207, K-702209, K-702217



### **Glass Options**

• L: Clear

#### Frame Finishes/Colors

BH: Bright BrassSHP: Polished SilverNX: Brushed NickelABV: Brushed Bronze

# **Specified Model**

Model	Application	Glass Options	Frame Finishes/Colors			
K-702205	Bath	□ L	□BH	□ SHP	□ NX	□ ABV
K-702207	Shower	□ L	□ BH	□ SHP	□ NX	□ ABV
K-702209	Shower	□ L	□ BH	□ SHP	□ NX	□ ABV
K-702217	Shower	□ L			□ NX	

# **Product Specification**


The bypass bath/shower door shall have 3/8" (1 cm) thick tempered glass and Clean Coat glass coating. Door shall have out-of-plumb adjustability for easy installation, stainless steel hardware to prevent rusting or corrosion, and a gently curved inside and outside towel bar. Door shall have smooth, easy-to-clean wall jambs. Door shall have a center-guided door panel mechanism for smooth, quiet sliding action and easy cleaning. Bath/shower door shall be Kohler Model K-\_\_\_\_\_\_\_\_.

# FLUENCE<sub>®</sub>

## **Installation Notes**

Install this product according to the installation guide.

Model	A (Max)	В	C (Walk Through)
K-702205	59-5/8" (151.4 cm)	58-5/16" (148.1 cm)	27-7/8" (70.8 cm)
K-702207	59-5/8" (151.4 cm)	70-5/16" (180.2 cm)	27-7/8" (70.8 cm)
K-702209	47-5/8" (121 cm)	70-5/16" (180.2 cm)	21-7/8" (55.6 cm)
K-702217	59-5/8" (151.4 cm)	75" (190.5 cm)	27-7/8" (70.8 cm)

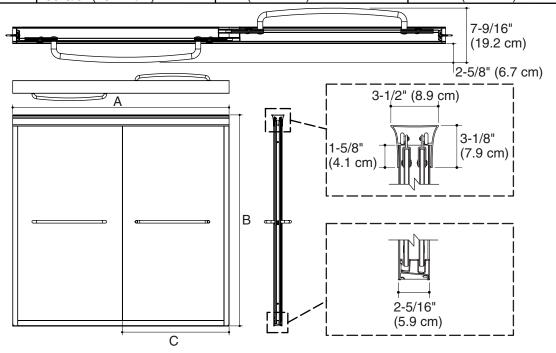

**Product Diagram** 

